

D

C

B


A

D

C

B

A

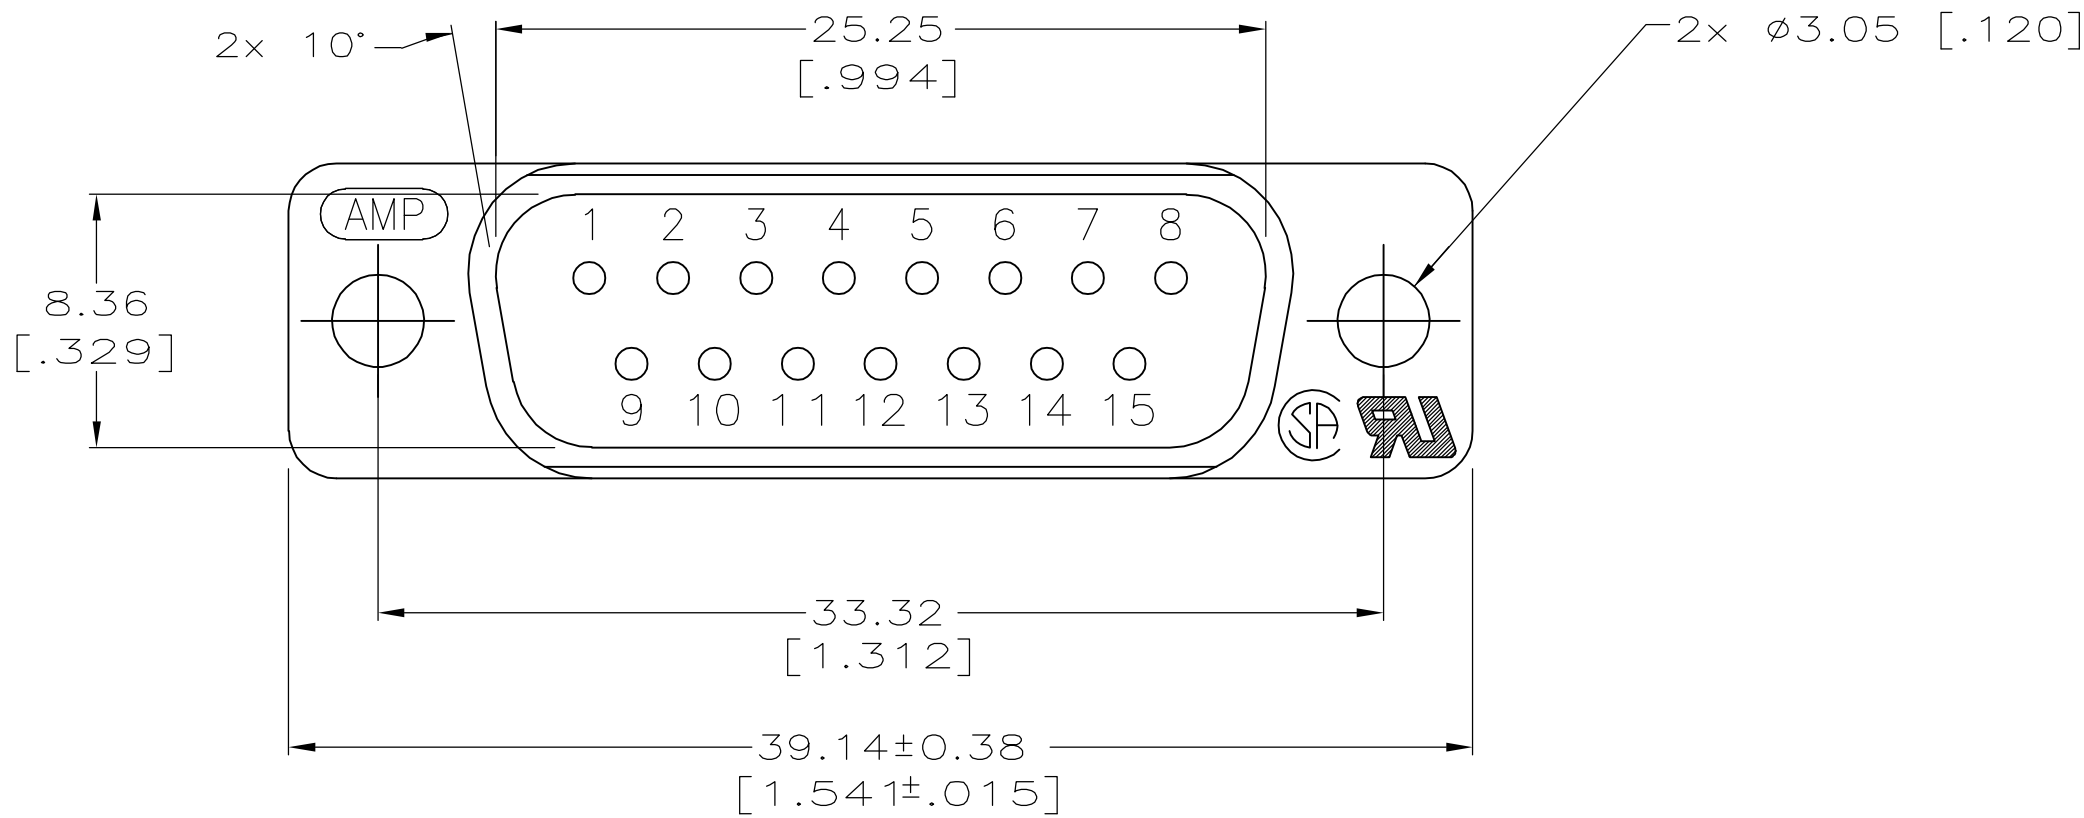




HOUSING: BLACK POLYESTER, UL 94V-0 RATED.
CONTACTS: BRASS PER MIL-C-50.



GOLD PLATED FOR LENGTH OF 3.81[.150] MIN FROM MATING END,
GOLD FLASH IN MATED AREA,
2.54µm [.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A
FROM OPPOSITE END, ALL OVER
1.27µm [.000050] MIN NICKEL.



GOLD PLATED FOR LENGTH OF 3.81[.150] MIN FROM MATING END,
0.76µm [.000030] MIN GOLD IN MATED AREA,
2.54µm [.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A
FROM OPPOSITE END, ALL OVER
1.27µm [.000050] MIN NICKEL.
OR
GOLD FLASH OVER PALLADIUM NICKEL PLATED FOR LENGTH OF
3.81 [.150] MIN FROM MATING END,
0.76µm [.000030] MIN PALLADIUM NICKEL IN MATED AREA,
2.54µm [.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A
FROM OPPOSITE END, BOTH OVER
1.27µm [.000050] MIN NICKEL.

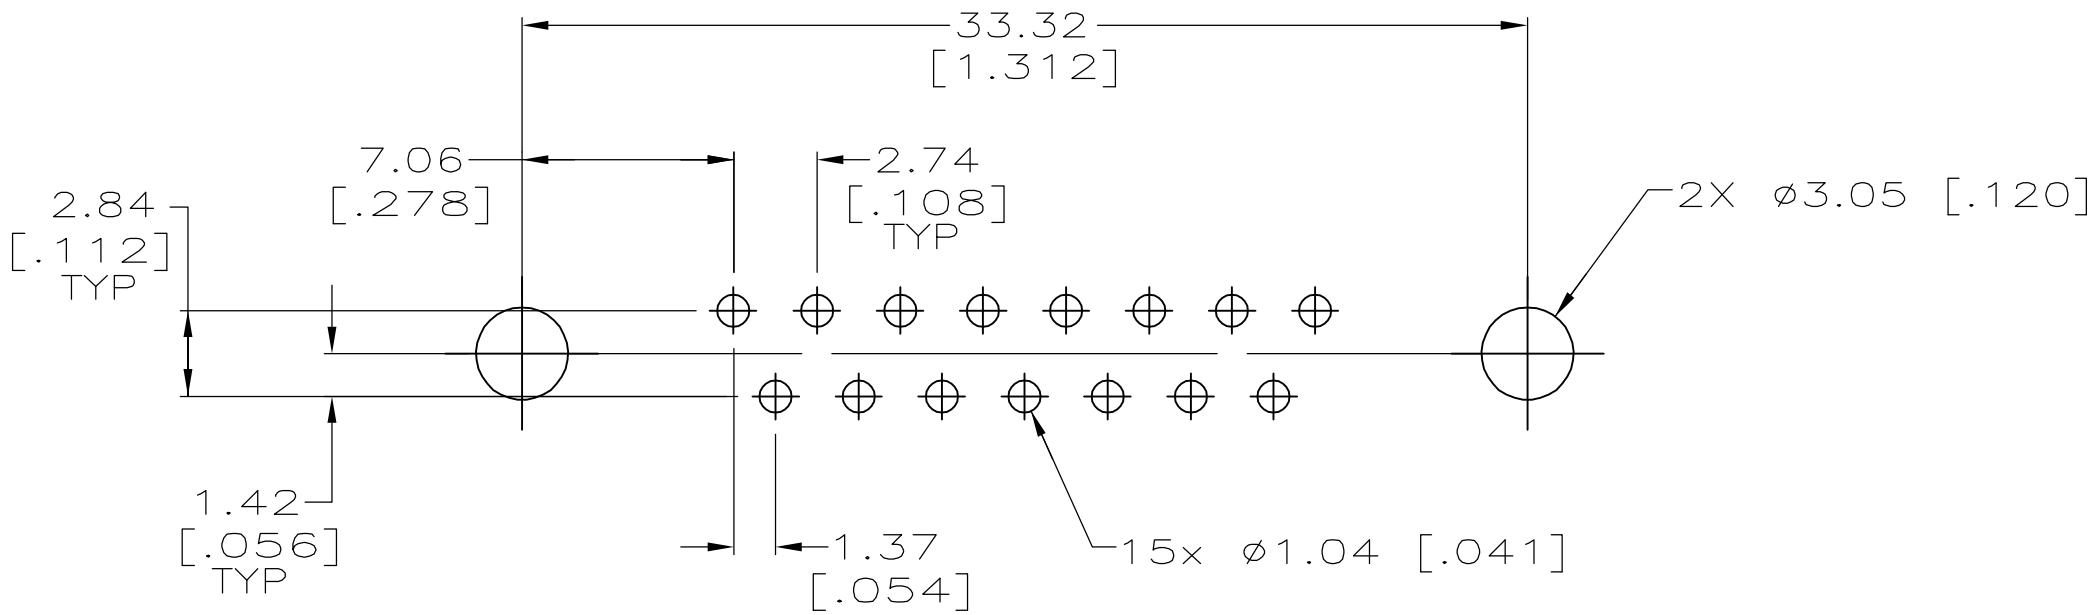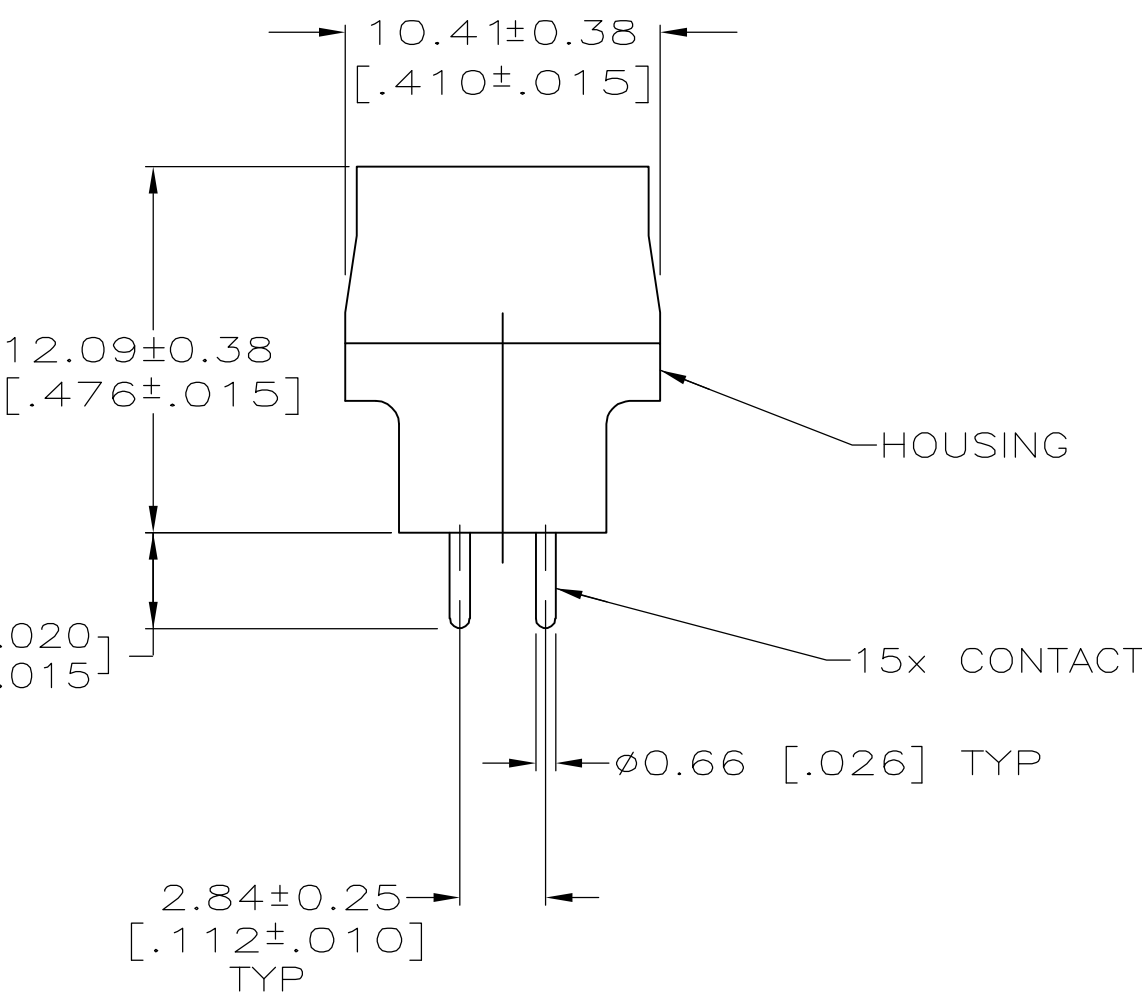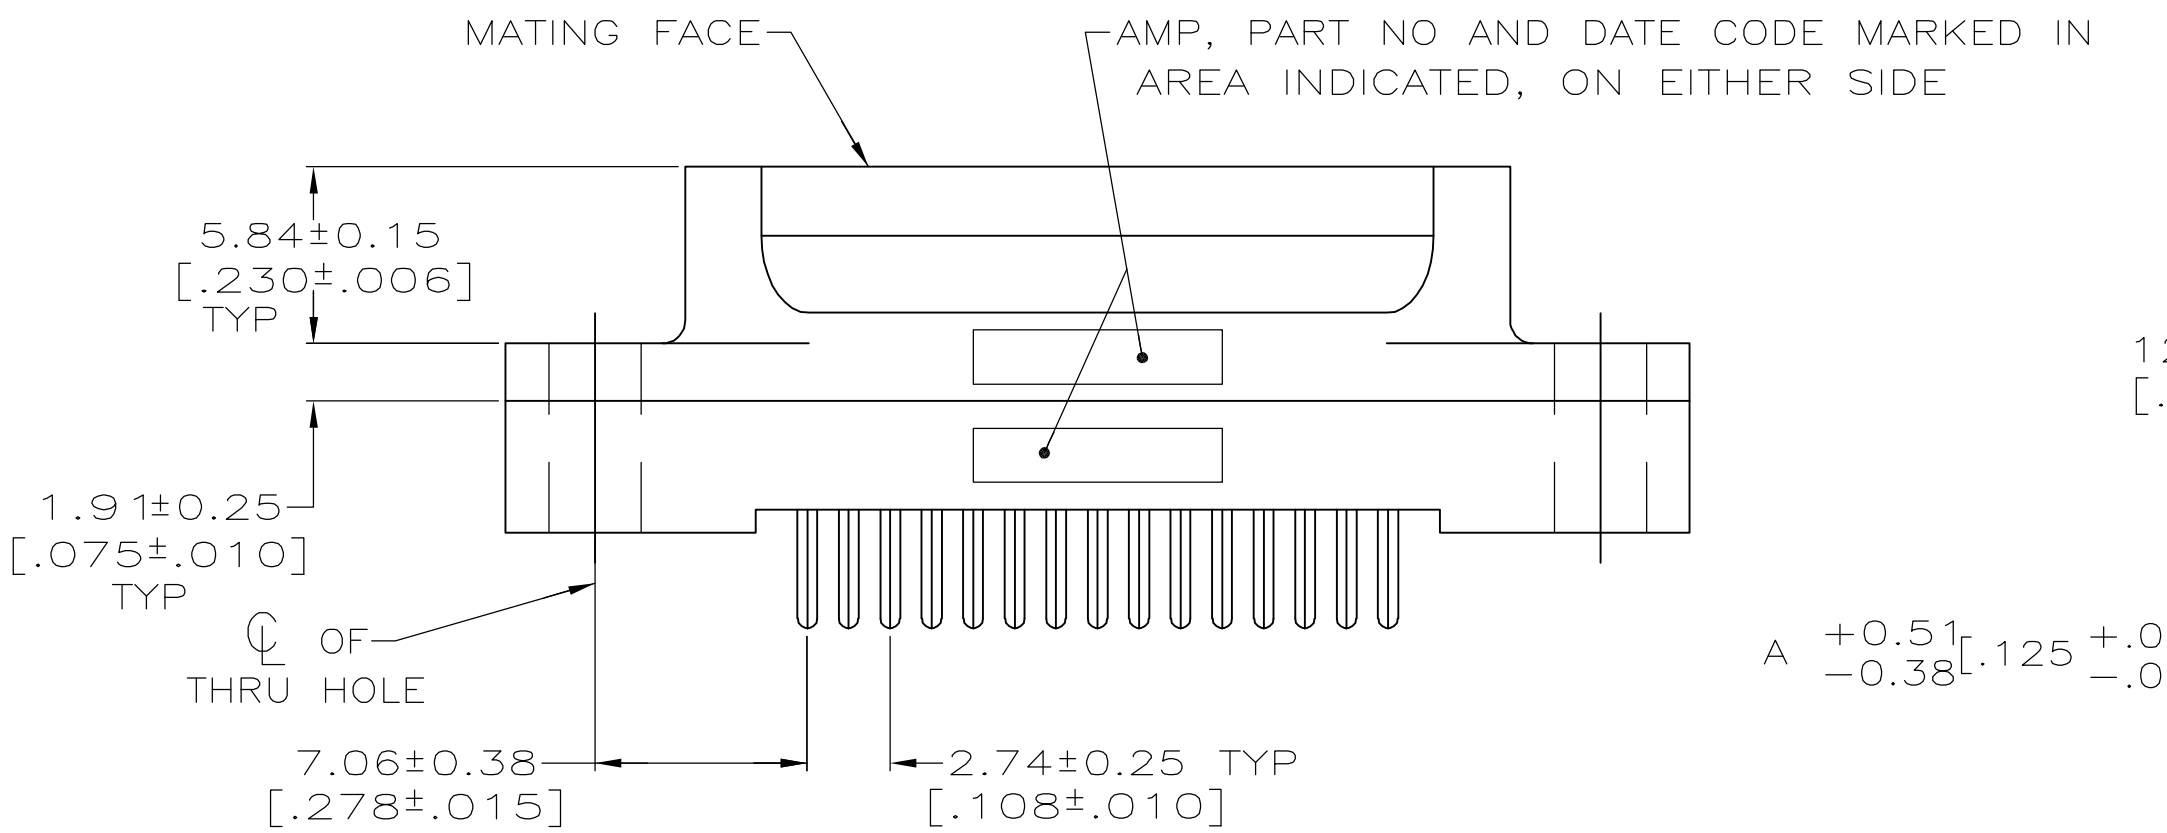

RECOMMENDED PC BOARD
MOUNTING DIMENSIONS

OBSOLETE	6.35	[.250]	3	208007-6
OBSOLETE	6.35	[.250]	2	208007-5
OBSOLETE	4.32	[.170]	3	208007-4
SUPSD BY 208007-4	4.32	[.170]	2	208007-3
	3.18	[.125]	3	208007-2
OBSOLETE	3.18	[.125]	2	208007-1
A			CONTACT FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. POLIGNONE 01FEB07		tyco Electronics		Tyco Electronics Corporation					
DIMENSIONS: mm [INCHES]		CHK E. BRIANT 01FEB07				Harrisburg, PA 17105-3608					
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD E. BRIANT 01FEB07		NAME		PLUG ASSEMBLY, SIZE 2, 15 POSN, VERTICAL, AMPLIMITE HD-20				
	0 PLC ± -		PRODUCT SPEC								
	1 PLC ± -		108-40025								
2 PLC ± - 0.13 [.005]		APPLICATION SPEC		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
3 PLC ± -		-		A2		00779		C=208007		-	
4 PLC ± -		WEIGHT -									
ANGLES ± 2°		CUSTOMER DRAWING						SCALE 4:1		SHEET 1 of 1	
MATERIAL		FINISH								REV K	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[208007-2](#)