

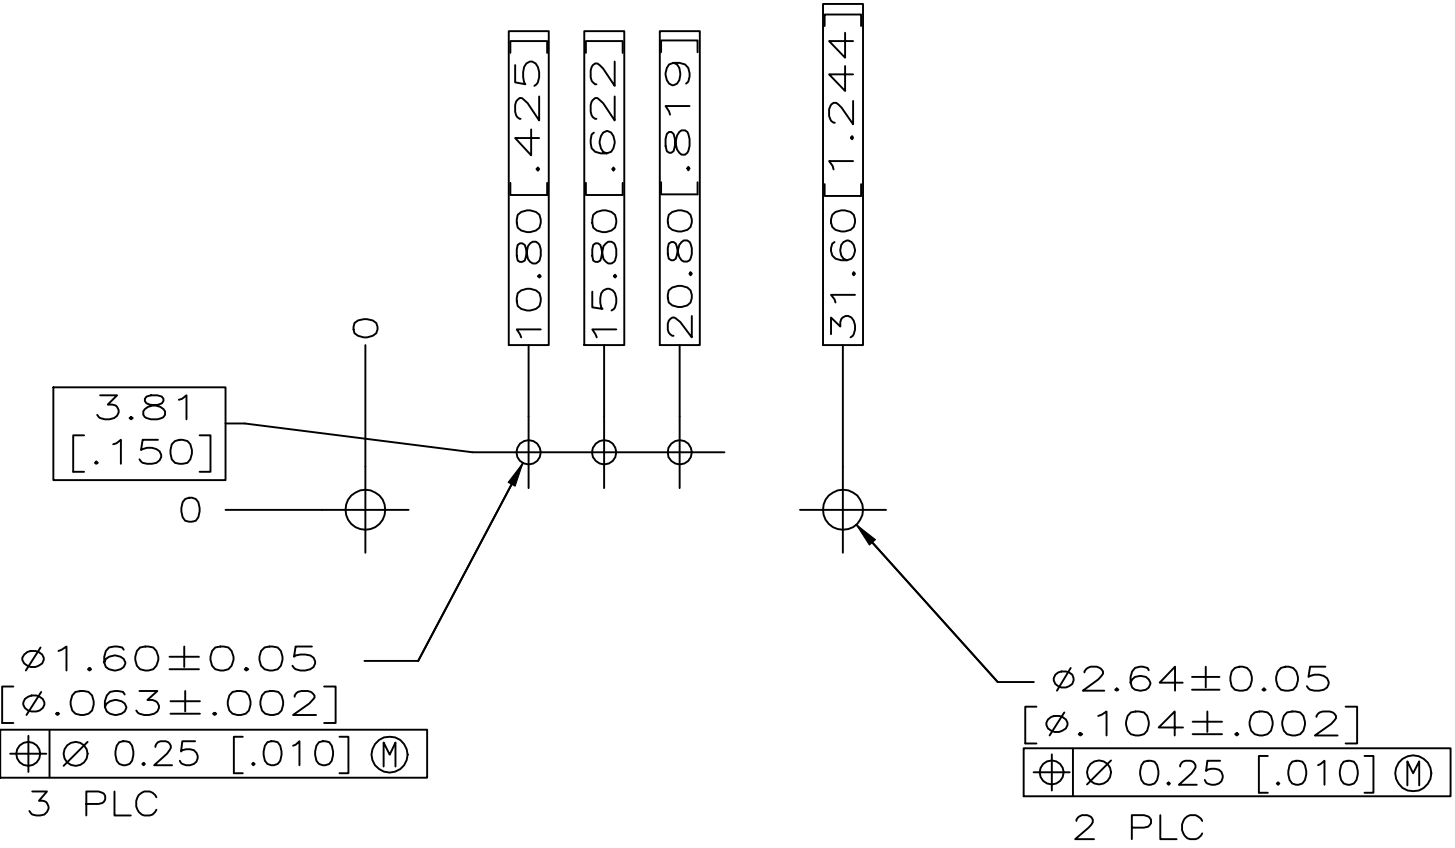
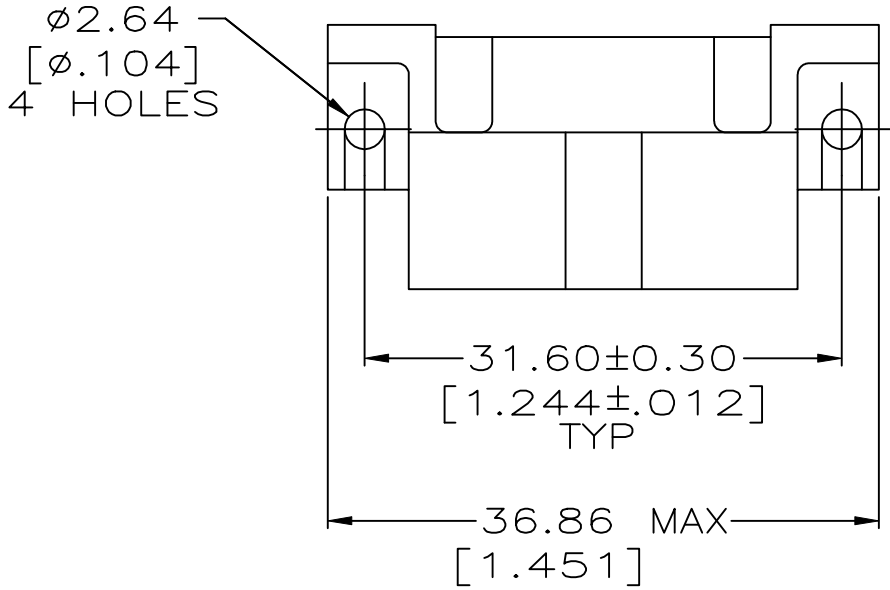


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	K	REVISED PER 0G3B-0168-05	3/10/05	SS	GS
	L	REVISED PER ECO-18-000443	19JAN2018	RS	MZ

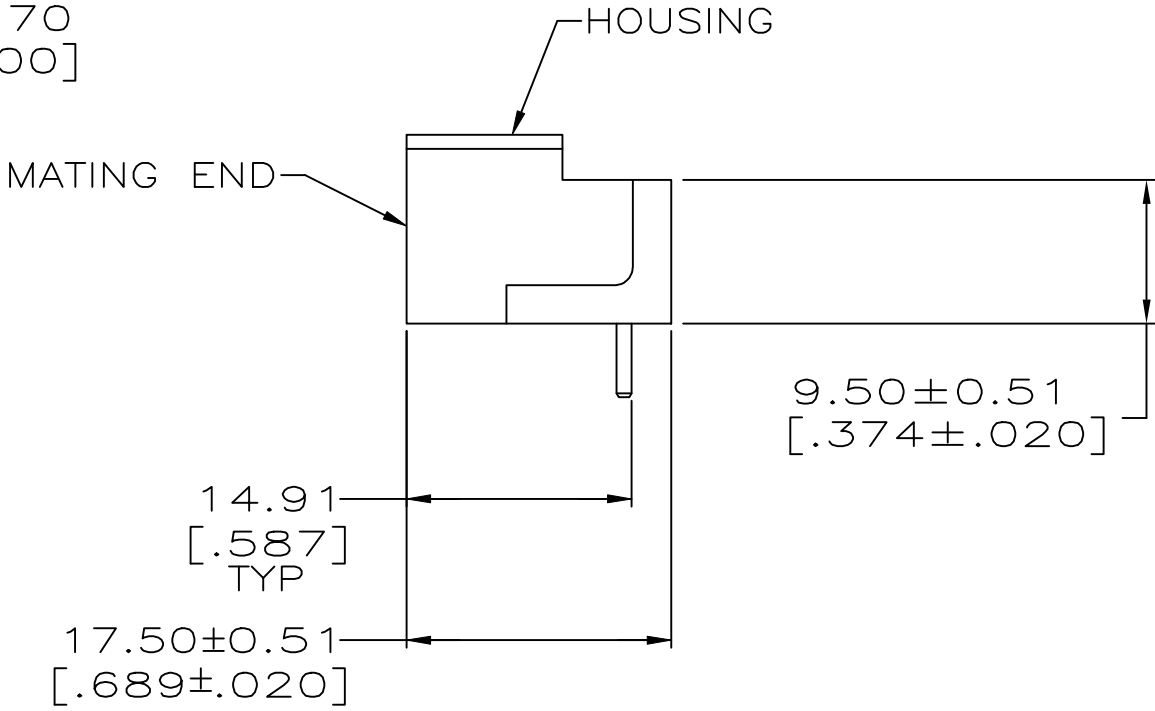


RECOMMENDED PC BOARD LAYOUT

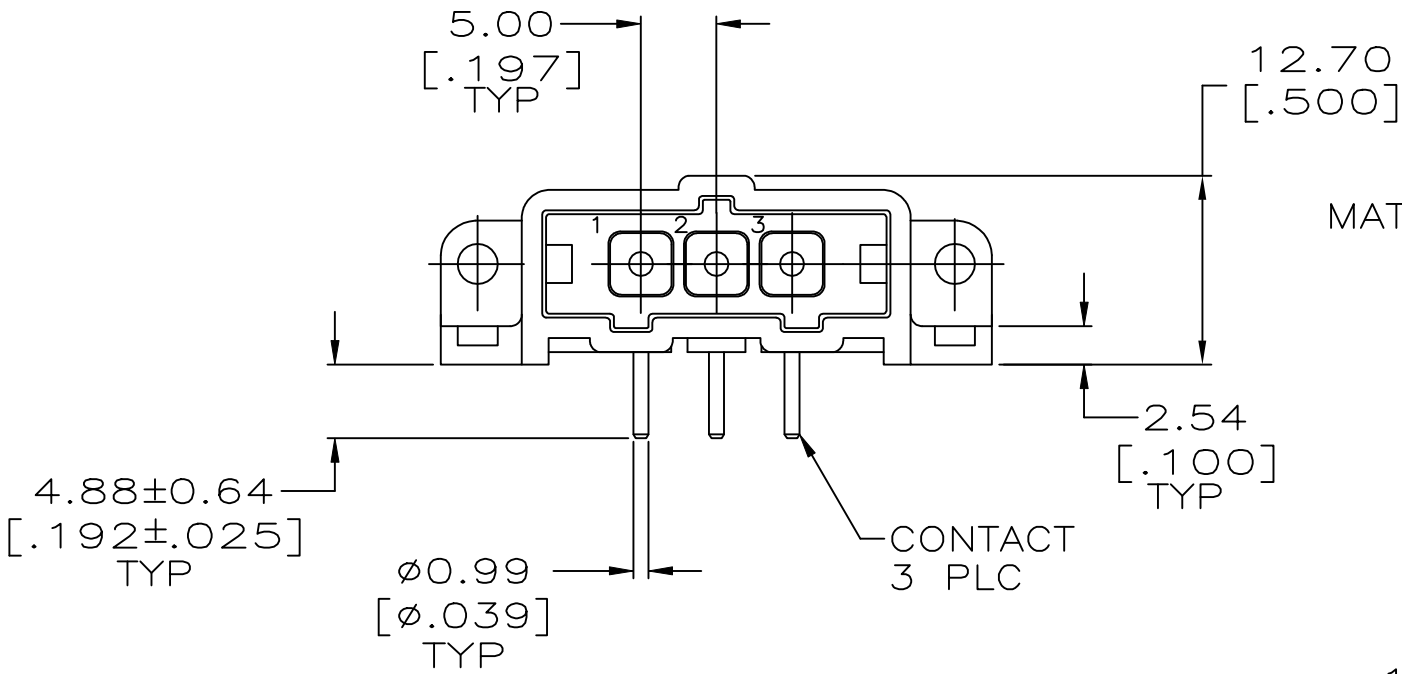

- ① NYLON, RED.
- ② BRASS PER ASTM B36.
- ③ 3.81um [0.000150] MIN TIN-LEAD OVER 2.54um [0.000100] MIN COPPER OF 1.27um [0.000050] MIN NICKEL.
- ④ 0.76um [0.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END, 3.81um [0.000150] MIN TIN-LEAD FOR A LENGTH OF 5.51 [.217] MIN FROM OPPOSITE END, BOTH OVER 1.27um [0.000050] MIN NICKEL.
- ⑤ 3.81um [0.000150] MIN TIN OVER 2.54um [0.000100] MIN COPPER OF 1.27um [0.000050] MIN NICKEL.
- ⑥ 0.76um [0.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END, 3.81um [0.000150] MIN TIN FOR A LENGTH OF 5.51 [.217] MIN FROM OPPOSITE END, BOTH OVER 1.27um [0.000050] MIN NICKEL.

	⑥	207541-7
	⑤	207541-6
OBSOLETE	④	207541-3
OBSOLETE	③	207541-1
FINISH		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.SIPE 07/07/92		 TE Connectivity Ltd.				
DIMENSIONS: mm [INCHES]		CHK R.STONE 7-24-92						
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —		NAME PIN HEADER ASSY, 3 POSN, IN-LINE, RIGHT ANGLE, SMALL METRIC CONNECTOR, METRIMATE			
	0 PLC ± —		PRODUCT SPEC —					
	1 PLC ± —		—					
	2 PLC ± 0.25 [.010]		APPLICATION SPEC —					
	3 PLC ± —		—					
MATERIAL HOUSING:  CONTACTS: 	4 PLC ± —		WEIGHT —		SIZE A2	CAGE CODE 00779	DRAWING NO C=207541	RESTRICTED TO —
	ANGLES ± —							
	FINISH CONTACTS: SEE TABLE							
CUSTOMER DRAWING				SCALE 2:1	SHEET 1 of 1	REV L		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207541-1](#)