


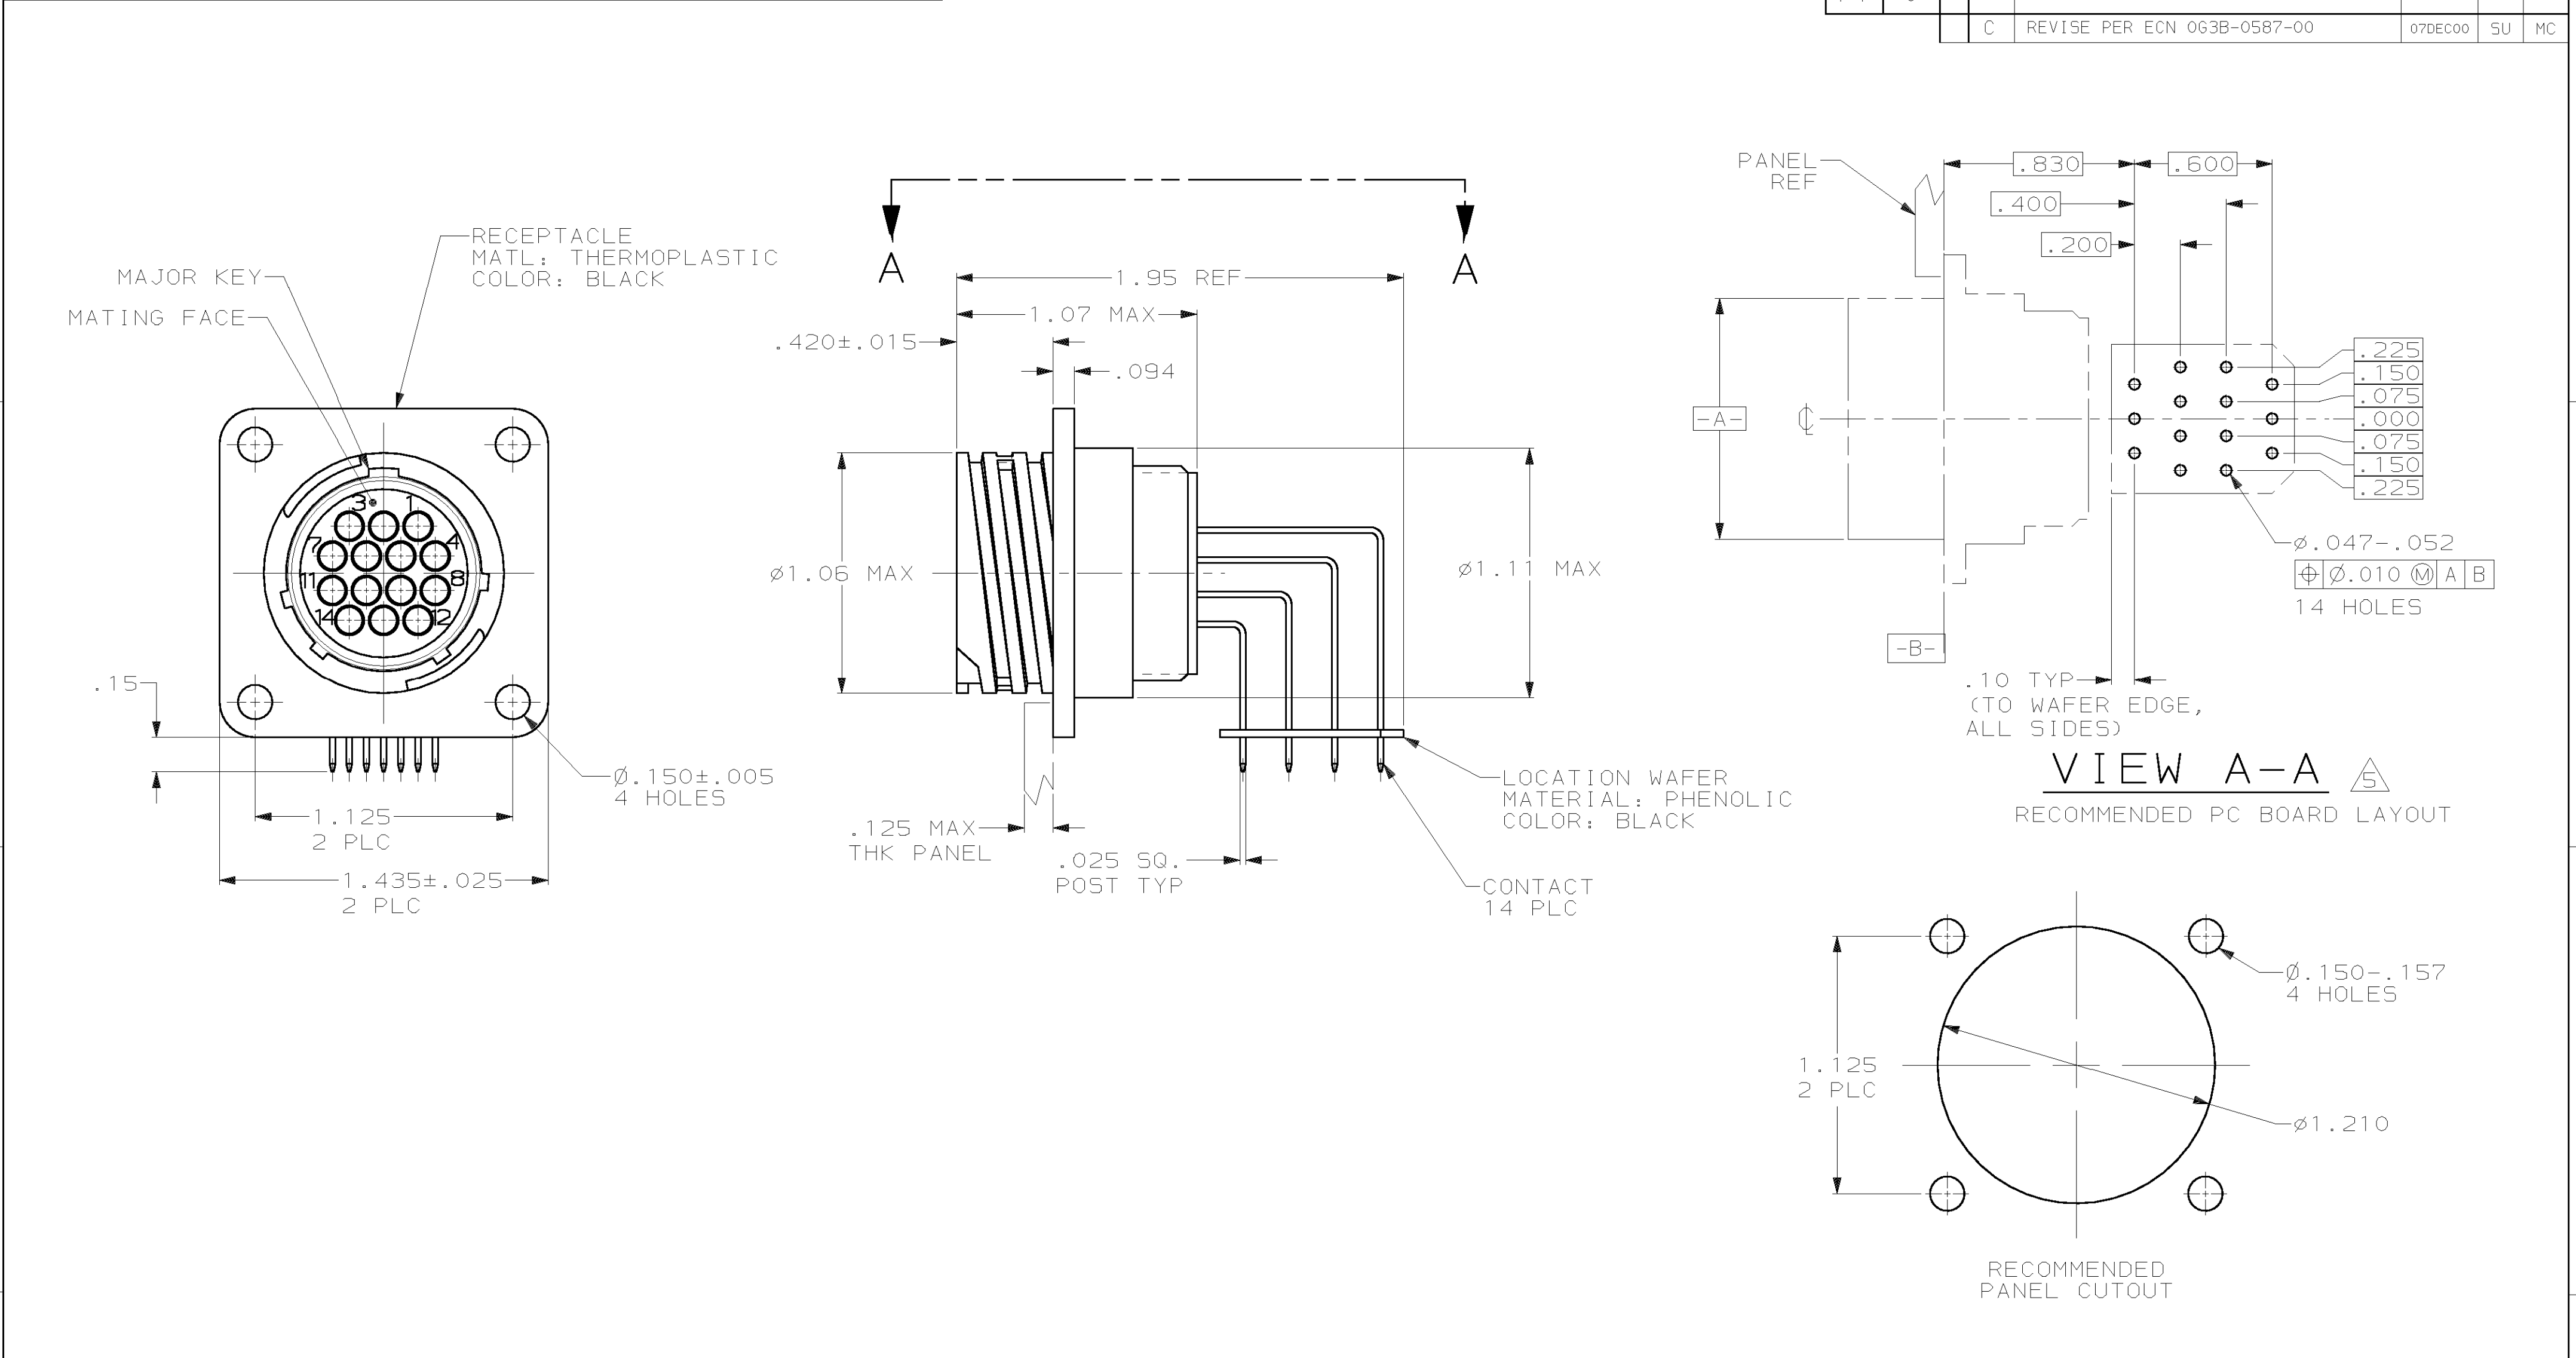

1. CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.

2. #6 FASTENER RECOMMENDED FOR MOUNTING.

3. CONTACT BODY: .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL.
CONTACT POST: .000100 MIN TIN-LEAD OVER .000100 MIN COPPER.

4. CONTACT BODY: .000030 MIN GOLD FOR A LENGTH OF .200 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.
CONTACT POST: .000100 MIN TIN-LEAD OVER .000100 MIN COPPER.

5. PC BOARD HOLE PATTERN IS DEFINED RELATIVE TO CONNECTOR Ø AND PANEL MOUNTING FACE INDICATED.

4	796348-2
3	796348-1
CONTACT FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN HAMNER 3-10-00	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK M.CHACKO 3-21-00	NAME	
		APVD M.CHACKO 3-21-00	RECEPTACLE ASSY, POSTED, RT ANGLE, RVS SEX, SIZE 17-14, SERIES 1, CPC	
	0 PLC ±- 1 PLC ±- 2 PLC ±.03 3 PLC ±.010 4 PLC ±- ANGLES ±- FINISH -	PRODUCT SPEC	SIZE A2	
		APPLICATION SPEC	CAGE CODE 00779	
MATERIAL		WEIGHT	DRAWING NO C-796348	RESTRICTED TO
CUSTOMER DRAWING			SCALE 2/1	SHEET 1 OF 1
			REV C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[796348-1](#)