




HEYClip™ Nylon Kayak Clips

Maximum Assembled Panel Sequence


ASSEMBLED PANEL THICKNESS RANGE				MOUNTING HOLE DIAMETER RANGE				PART NO.	DESCRIPTION	PART DIMENSIONS								Head Type	Style
Maximum		Minimum		Maximum		Minimum				A		B		C		D			
in.	mm.	in.	mm.	in.	mm.	in.	mm.	Natural		in.	mm.	in.	mm.	in.	mm.	in.	mm.		
KC Series																			
.09	2,3	.06	1,5	.140	3,6	.135	3,4	4272	KC 09-14	.33	8,4	.16	4,1	.30	7,6	.06	1,5	TRUSS	
.09	2,3	.06	1,5	.141	3,6	.131	3,3	4273	KC 09-14-1	.27	6,9	.16	4,1	.40	10,2	.15	3,8	ROUND	2
.10	2,5	.08	2,0	.127	3,2	.123	3,1	4274	KC 10-13	.33	8,4	.13	3,3	.27	6,9	.04	1,0	TRUSS	
.13	3,3	.08	2,0	.141	3,6	.131	3,3	4275	KC 13-14	.37	9,4	.17	4,3	.41	10,4	.10	2,5	PAN	1
				.205	5,2	.175	4,4	4276	KC 13-21	.43	10,9	.21	5,3	.50	12,7	.25	6,4	ROUND	2
.14	3,6	.07	1,8	.150	3,8	.125	3,2	4278	KC 14-15	.43	10,9	.16	4,1	.30	7,6	.10	2,5	ROUND	1
				.200	5,1	.185	4,8	4277	KC 13-20	.44	11,2	.21	5,3	.37	9,4	.05	1,3	BINDING	2
.16	4,1	.10	2,5	.192	4,9	.182	4,6	4279	KC 16-19	.43	10,9	.21	5,3	.37	9,4	.06	1,5	TRUSS	
				.200	5,1	.185	4,7	4282	KC 16-20	.44	11,2	.21	5,3	.38	9,7	.06	1,5	BINDING	2
.21	5,3	.09	2,3	.220	5,6	.200	5,1	4283	KC 21-22	.50	12,7	.24	6,1	.52	13,2	.07	1,8	PAN	
				.275	7,0	.240	6,1	4284	KC 21-28	.63	16,0	.29	7,4	.50	12,7	.05	1,3	BINDING	
.22	5,6	.10	2,5	.280	7,1	.245	6,2	4285	KC 22-28	.63	16,0	.29	7,4	.86	21,8	.09	2,3	TRUSS	1
				.260	6,6	.240	6,1	4286	KC 22-26	.46	11,7	.29	7,4	.45	11,4	.06	1,5	PAN	

Standard color natural. Consult Heyco for black and other colors.

- A low cost replacement for screws and rivets.
- Snap into round mounting holes.
- Fasten securely into a variety of materials.
- Ideal for assembling lightweight panels and components.

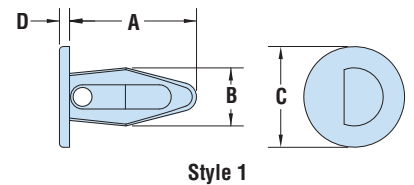

Style 1

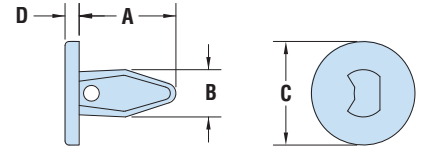

Style 2


HEYClip™ Nylon Holster Clips

Mounting Hole Diameter/Assembled Panel Thickness Sequence

MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS		PART NO.	DESCRIPTION	HEAD DIAMETER	
in.	mm.	in.	mm.			in.	mm.
HHC Series							
.219	5,6	.093	2,3	4287	HHC 09-22	.34	8,6
		.125	3,3	4289	HHC 13-22		
		.156	4,1	4292	HHC 16-22		
		.187	4,8	4294	HHC 19-22		
		.219	5,5	4295	HHC 22-22		
		.250	6,4	4296	HHC 25-22		
		.281	7,1	4297	HHC 28-22		
		.312	7,9	4298	HHC 31-22		
		.343	8,6	4299	HHC 34-22		
		.375	9,7	4322	HHC 38-22		
.250	6,4	.093	2,3	4288	HHC 09-25	.50	12,7
		.156	4,1	4293	HHC 16-25	.31	7,9

Standard color natural. Consult Heyco for black and other colors.

- Holster shaped interior allows the part to collapse more completely, for assembly with just **fingertip pressure**.
- Tapered, bullet-style point **slides easily** into any mounting hole.
- Angled panel locking section **takes up slack** to provide for a tight assembly.
- The design allows for a relatively large clip-diameter-to-hole-size ratio, resulting in **higher retention force**.
- Consult Heyco for other mounting hole and panel thickness **variations**.



Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185°F (85°C)

Quick Specs

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[4297](#) [4296](#) [4287](#) [4288](#) [4292](#) [4294](#) [4322](#) [4299](#) [4295](#) [4293](#) [4289](#) [4298](#) [4286](#) [4285](#) [4283](#) [4276](#) [4273](#) [4278](#)
[4282](#) [4274](#) [4279](#) [4272](#) [4275](#) [4277](#) [4284](#)