



■ Features :

- 1000VDC I/O isolation
- Internal SMD technology
- Built-in EMI filter
- Cooling by free air convection
- Non-conductive plastic case
- Dual in line package
- 100% burn-in test
- Low cost / High reliability
- Approvals: FCC / CE
- 2 years warranty


SELECTION GUIDE


ORDER NO.	SUS01L-05	SUS01M-05	SUS01N-05	SUS01O-05	SUS01L-09	SUS01M-09	SUS01N-09	SUS01O-09
DC OUTPUT VOLTAGE	5V				9V			
OUTPUT CURRENT RANGE	0 ~ 200mA				0 ~ 111mA			
EFFICIENCY	73%	74%	72%	74%	75%	79%	80%	77%
ORDER NO.	SUS01L-12	SUS01M-12	SUS01N-12	SUS01O-12	SUS01L-15	SUS01M-15	SUS01N-15	SUS01O-15
DC OUTPUT VOLTAGE	12V				15V			
OUTPUT CURRENT RANGE	0 ~ 84mA				0 ~ 67mA			
EFFICIENCY	78%	82%	83%	83%	79%	82%	83%	83%

SPECIFICATION

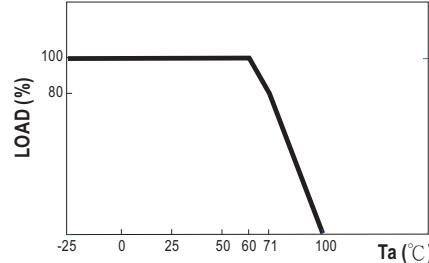
OUTPUT	RATED POWER	1W							
	RIPLE & NOISE (max.) Note.2	100mVp-p							
	LINE REGULATION Note.3	±1.2% for 1% input variation							
	LOAD REGULATION Note.4	±8.0%							
	VOLTAGE ACCURACY	±2.0%							
	SWITCHING FREQUENCY	50KHz min.							
INPUT	VOLTAGE RANGE	4.5 ~ 5.5V	10.8 ~ 13.2V	21.6 ~ 26.4V	43.2 ~ 52.8V	4.5 ~ 5.5V	10.8 ~ 13.2V	21.6 ~ 26.4V	43.2 ~ 52.8V
	NORMAL VOLTAGE	5V	12V	24V	48V	5V	12V	24V	48V
	INPUT CURRENT	Full load	280mA	112mA	55mA	28mA	280mA	112mA	55mA
		No load	21mA	11mA	10mA	3mA	21mA	11mA	10mA
	FILTER	Capacitor type							
	PROTECTION	Fuse recommended							
PROTECTION	OVERLOAD	Momentary							
		Protection type : Broken							
	SHORT CIRCUIT	Momentary							
		Protection type : Broken							
ENVIRONMENT	WORKING TEMP.	-25 ~ +71°C (Refer to "Derating Curve")							
	WORKING HUMIDITY	20% ~ 90% RH non-condensing							
	STORAGE TEMP., HUMIDITY	-25 ~ +105°C, 10 ~ 95% RH							
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50°C)							
	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes							
SAFETY & EMC	SAFETY STANDARDS	EAC TP TC 004 approved							
	WITHSTAND VOLTAGE	I/P-O/P:1KVDC							
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH							
	ISOLATION CAPACITANCE	80pF max.							
OTHERS	EMC EMISSION	Compliance to EN55032 Class B, FCC part 15 Class B, EAC TP TC 020							
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8, light industry level, criteria A, EAC TP TC 020							
	MTBF	700khrs min. MIL-HDBK-217F(25°C)							
WEIGHT	DIMENSION	22.6*9.9*8.9mm or 0.89"**0.39"**0.35" inch (L*W*H)							
	WEIGHT	3.1g							

Mechanical Specification

Unit: mm (inch)


Pin Configuration

Pin No.	Output
1 & 16	+Vin
6 & 11	-Vout
7 & 10	+Vout
8 & 9	-Vin

Derating Curve

NOTE

1. All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
2. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
3. Line regulation is measured from low line to high line at rated load.
4. Load regulation is measured from 20% to 100% rated load.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[MEAN WELL](#):

[SUS01L-15](#) [SUS01M-09](#) [SUS01M-12](#) [SUS01M-15](#) [SUS01N-12](#) [SUS01N-15](#) [SUS01O-15](#)