

4

3

2





1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
BD	39		D	EC 0G3B-0317-03	24APR03	VF GS

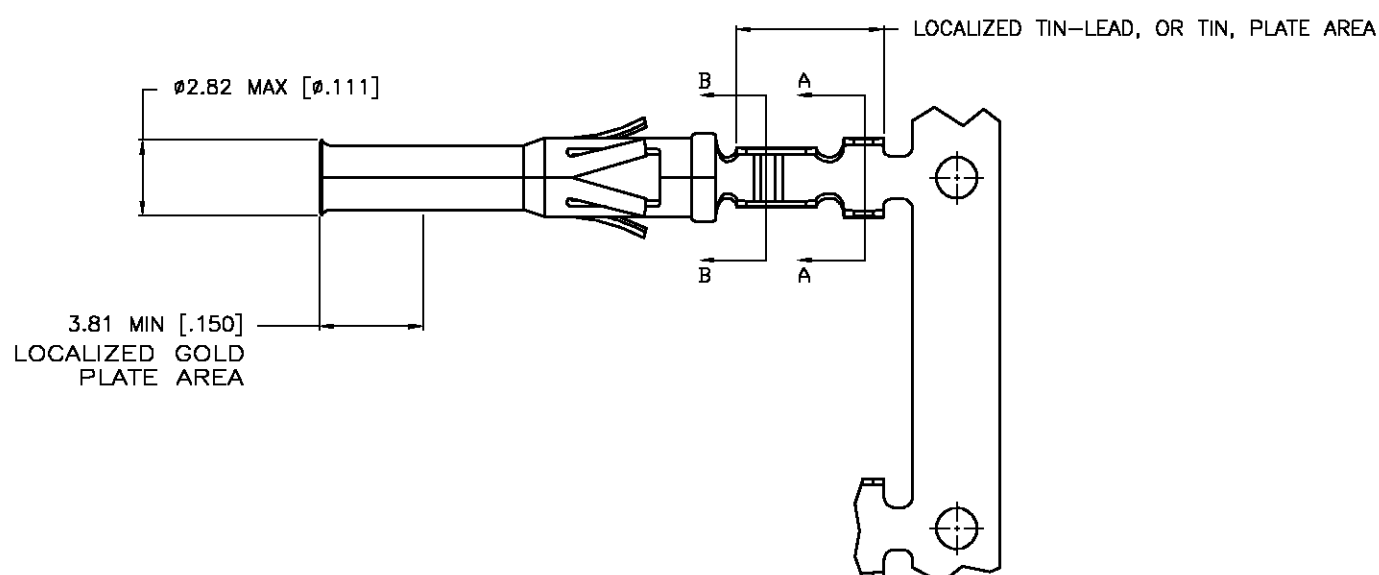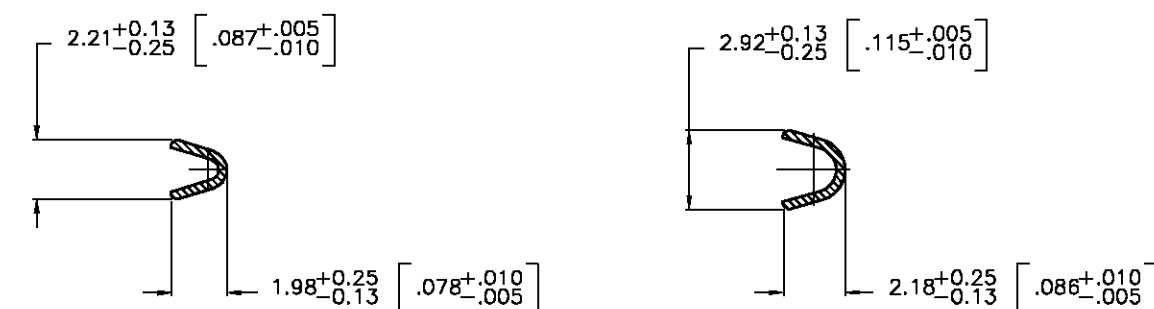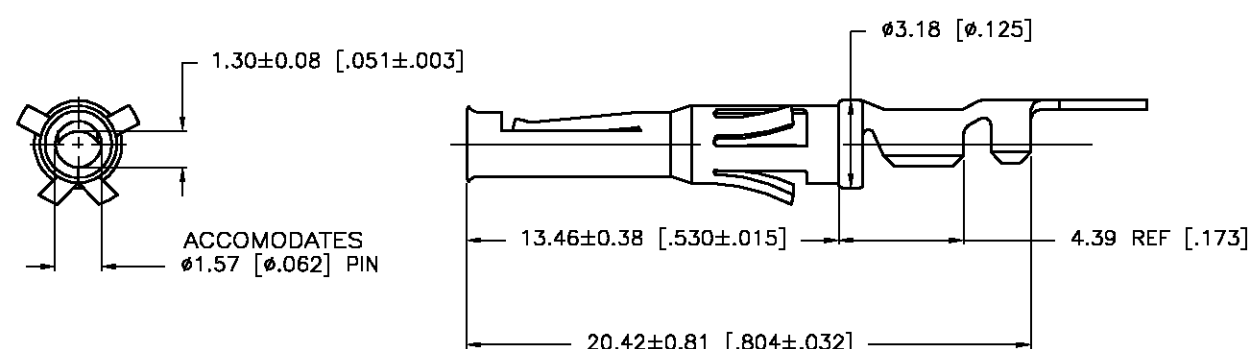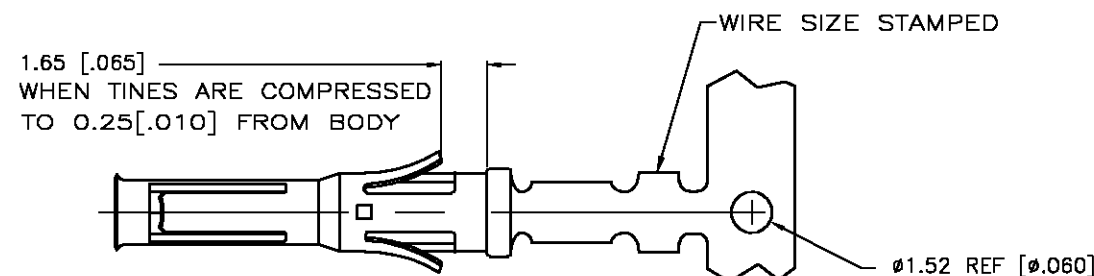

1. WIRE RANGE 24-20 AWG.
 2. INSULATION RANGE 1.02-2.03 [.040-.080] DIA.
 3. FOR LOOSE PIECE PART SEE DWG 66594.
- △ 0.76µm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27µm [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA,
BOTH OVER 1.27µm [.000050] MIN NICKEL.
- △ TIN PLATED.
- △ GOLD PLATING PER MIL-G-45204, TIN PER MIL-T-10727
- △ 0.76µm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27µm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA,
BOTH OVER 1.27µm [.000050] MIN NICKEL.

OBSOLETE	REVERSE REELED FOR MINI-APPLICATOR	△	1-66584-0
	REVERSE REELED FOR MINI-APPLICATOR	△	66584-4
	-	△	66584-3
	REVERSE REELED FOR MINI-APPLICATOR	△	66584-2
	-	△	66584-1
DESCRIPTION		FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN V. FURLER 09JUN2003	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105	
DIMENSIONS: MM [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK G. STEINHAUER 09JUN03		
	0 PLC ± -	APVD G. STEINHAUER 09JUN03	NAME CONTACT, SOCKET, STRIP TYPE VI, MULTIMATE	
	1 PLC ± -	PRODUCT SPEC		
MATERIAL BRASS MIL-C-50	2 PLC ± 0.13 [.005]	APPLICATION SPEC	SIZE A3	CAGE CODE 00779
	3 PLC ± -	WEIGHT -	DRAWING NO C-66584	RESTRICTED TO -
FINISH SEE TABLE △		CUSTOMER DRAWING		
		SCALE 6:1	SHEET 1 OF 1	REV D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[66584-1](#)