


EA-21845-C37

SHT 1.1

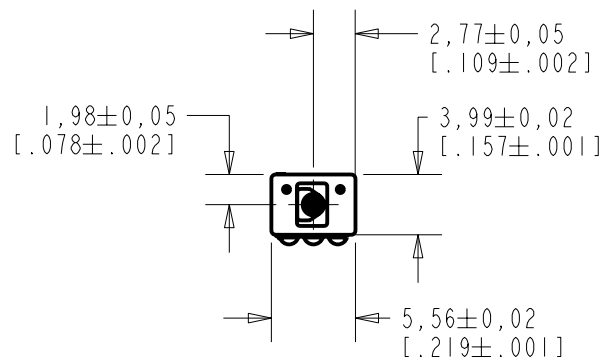


NOTE:

1. INCREASED PRESSURE AT THE SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.




2. LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED TO $\pm 0,17$ [.007].

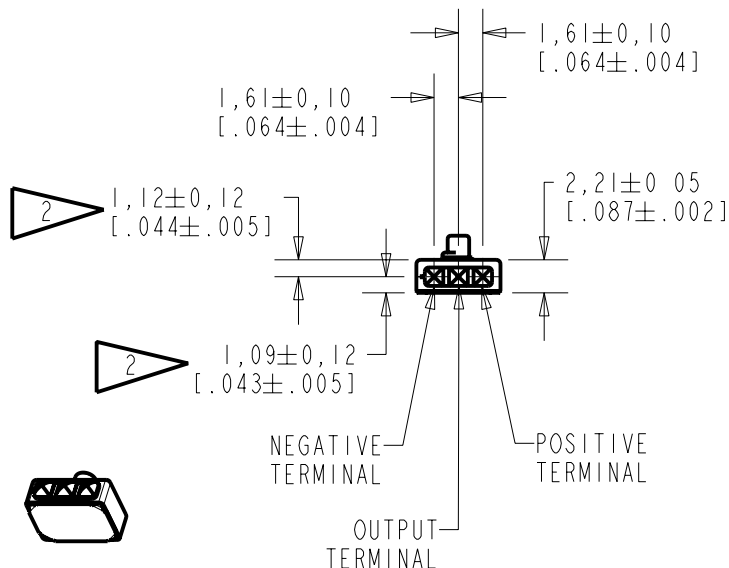

NOMINAL WEIGHT
.13 GRAM


DIMENSIONS IN MILLIMETERS [INCHES]

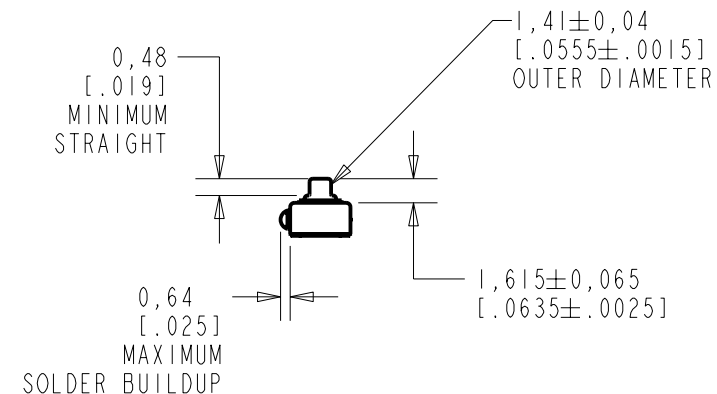

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
A	MI0101332	12-13-06	Released	A
SCALE: 1:2			DR. BY: LSY	DATE: 12-13-06
DO NOT SCALE DRAWING			CK. BY: GJP	DATE: 1-3-07
TITLE: MICROPHONE		EA-21845-C37	APP. BY: GJP	DATE: 1-3-07
OUTLINE DRAWING		SHT 1.1		

SENSITIVITY IN dB RELATIVE TO 1.0 VOLT/0.1 Pa (N/M²)
FOR CONDITIONS SHOWN BELOW.

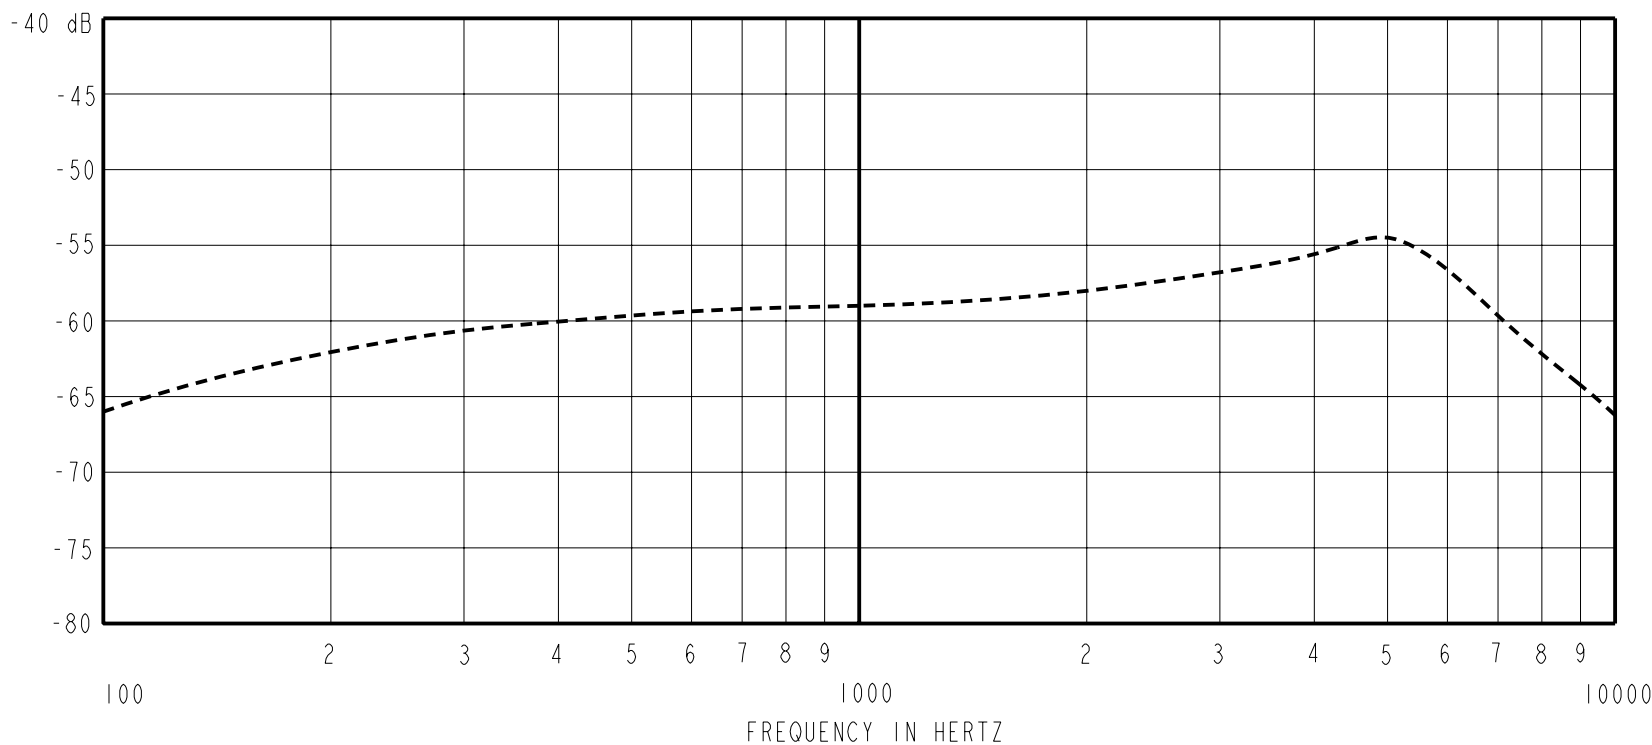


FREQUENCY	SENSITIVITY			DEVICE CONFORMITY	
	MIN.	NOM.	MAX.	RANGE OF DEVIATION FROM 1KHz	
100	---	-66.0	---	-11.0	-4.0
1000	-62.0	-59.0	-56.0	0.0	0.0
≈ 5000	---	-54.5	---	+1.5	+7.5

NOTES:

1. CASE CONNECTED TO NEGATIVE TERMINAL.
2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
3. CONFORMS TO REQUIREMENTS SHOWN ON 'ELECTRET MICROPHONE ENVIRONMENTAL QUALIFICATION TEST, SHEET 2.2'.

PORT LOCATION	DC SUPPLY	AMPLIFIER CURRENT DRAIN	SENSITIVITY CHANGE ON REDUCING SUPPLY TO 0.9VDC	"A" WEIGHTED NOISE (1 kHz EQUIV. SPL)	OUTPUT IMPEDANCE OHMS			CAPACITANCE ±50%	
					MIN.	NOM.	MAX.	1-2	1-3
OKP	1.3V	50 uA MAX.	3 dB MAX.	28.5 dB MAX.	2000	3500	6000	75pF	75pF

CAPACITANCE PROBE POINTS



Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
A	MI0101332	12-13-06	Released	A

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION

TITLE: **MICROPHONE**
PERFORMANCE SPECIFICATION

EA-21845-C37
SHT 2.1

DR. BY	DATE
LSY	12-13-06
CK. BY	DATE
GJP	1-3-07
APP. BY	DATE
GJP	1-3-07

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Knowles:

[EA-21842-G17](#) [EA-21842-000](#) [EA-23015-058](#) [EA-21843-G18](#) [EA-21868-000](#) [EA-21868-008](#) [EA-21842-C15](#) [EA-21939-C36](#) [EA-21939-000](#) [EA-21972-000](#) [EA-21842-C05](#) [EA-21842-035](#) [EA-21867-C36](#) [EA-21986-000](#) [EA-23178-078](#) [EA-21843-000](#) [EA-23006-A66](#) [EA-21843-C36](#) [EA-21868-C36](#) [EA-21843-C37](#) [EA-23003-000](#) [EA-21842-C36](#) [EA-21842-052](#) [EA-21867-000](#) [EA-21845-C37](#) [EA-21843-058](#) [EA-23015-000](#) [EA-21842-C60](#) [EA-26781](#) [EA-27076-000](#) [EA-26781-000](#) [EA-26520-000](#) [EA-23033-000](#) [EA-21842-C65](#) [EA-1845-C37](#) [EA-29607-000](#) [EA-21842-012](#) [EA-27076-142](#)