

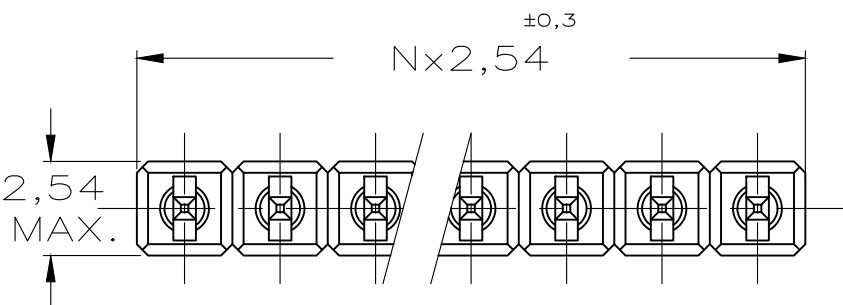


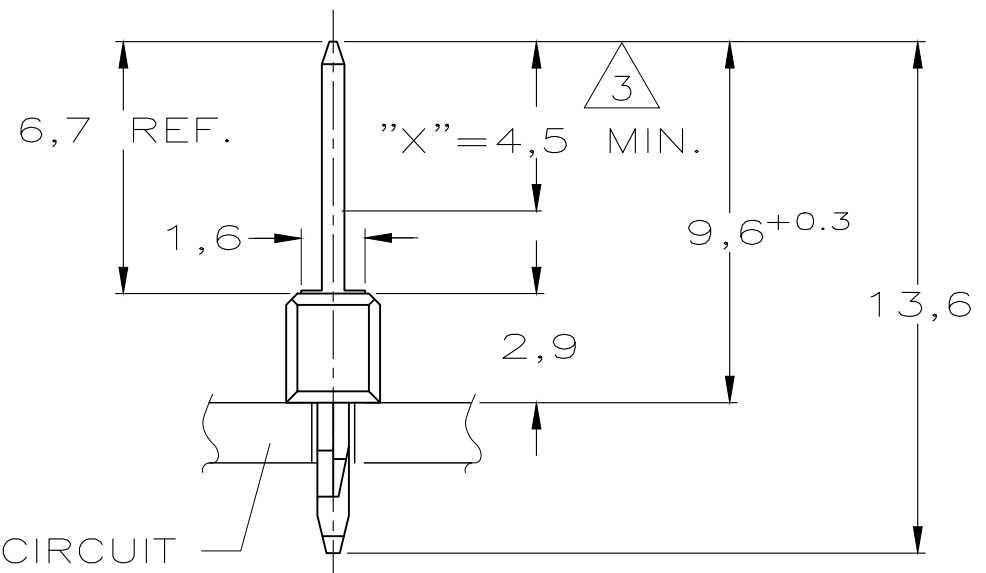

NOTES:

- 1 HOUSING-MATERIAL:20% GLASSFILLED POLYESTER (GREEN). CONTACT-MATERIAL:PHOSPHOR BRONZE.
- 2 ACTION-PIN SUITABLE FOR 1,6mm P.C.-BOARD-THICKNESS.
- 3 PLATING: AREA "X" Au-PLATED 0,76µm-THICKNESS. ACTION-PIN AREA: Sn-PLATED 1,27µm-THICKNESS. UNDER COATING:1,27µm Ni. ALL OVER.
- 4 TO DETERMINE DIMENSIONS TAKE N = Nr. OF POS. FOR EXAMPLE: 10 POS.=N x 2,54=25,40mm. FOR ORDER NR.:USE BASIC NR. + NR. OF POS. FOR EXAMPLE: 36 POS.= 3-215267-6-~~OBSOLETE~~6
- 5 MAX. PERMISSIBLE BURR AFTER CHOPPING 0,2mm.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

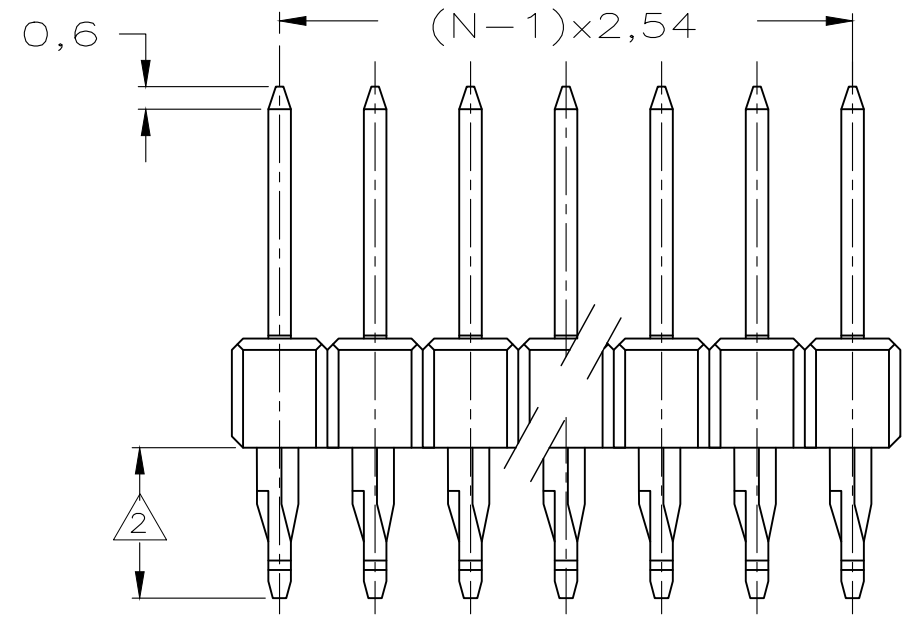

PRINTED CIRCUIT BOARD

| P.C.B. HOLE DIM. ACTION PIN |        |          |    |
|-----------------------------|--------|----------|----|
| DRILLED HOLE                | :1,15  | ±0,025   | mm |
| FIN. HOLE                   | :0,94  | to 1,09  | mm |
| AFTER REFLOW                | :0,91  | to 1,09  | mm |
| Cu-thks                     | :0,025 | to 0,075 | mm |
| Sn-thks                     | :0,004 | to 0,010 | mm |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| DIMENSIONS: | TOLERANCES UNLESS OTHERWISE SPECIFIED: |
|-------------|----------------------------------------|
| mm          | ±0,1                                   |
| 0 PLC       | ± -                                    |
| 1 PLC       | ± -                                    |
| 2 PLC       | ± -                                    |
| 3 PLC       | ± -                                    |
| 4 PLC       | ± -                                    |
| ANGLES      | ± -                                    |
| FINISH      | -                                      |

MATERIAL

SEE NOTES

DWN J.v.LIEMPT 7 MAY 97

CHK R.BROENS

APVD E.LEIJTENS

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME

40 POS. MOD II PIN HEADER 2,54 PITCH WITH ACTION-PIN, SINGLE ROW

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C-215267

SCALE 5:1

SHEET 1 OF 1

REV B3

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-215267-0](#)