

## Inline terminal - IB IL 24 DI8/HD-PAC - 2700173

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Inline digital input terminal, complete with accessories (connector plug and labeling field), 8 inputs, 24 V DC, 1-wire connection technology

### Product Features

- 8 digital inputs
- Connection of sensors in single-wire technology
- Diagnostic and status indicators



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	80.0 g
Custom tariff number	85389091
Country of origin	Germany

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Dimensions

Width	12.2 mm
Height	119.8 mm
Depth	71.5 mm
Note on dimensions	Housing dimensions

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)

## Inline terminal - IB IL 24 DI8/HD-PAC - 2700173

### Technical data

#### Ambient conditions

Permissible humidity (storage/transport)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20

#### General

Mounting type	DIN rail
Net weight	60 g
Note on weight specifications	with connector

#### Interfaces

Fieldbus system	Lokalbus
Designation	Inline local bus
Connection method	Inline data jumper
Transmission speed	500 kBit/s

#### Power supply for module electronics

Supply voltage	24 V DC (via voltage jumper)
Supply voltage range	19.2 V DC ... 30 V DC (including all tolerances, including ripple)
Power dissipation	max. 0.72 W
Communications power $U_L$	7.5 V (via voltage jumper)
Current consumption	max. 30 mA (from the local bus)
Power consumption	max. 0.25 W (at $U_L$ )

#### Inline potentials

Communications power $U_L$	7.5 V DC
Current consumption from $U_L$	max. 30 mA DC
Segment circuit supply $U_S$	24 V DC (nominal value)
Current consumption from $U_S$	max. 5.5 mA DC

#### Digital inputs

Input name	Digital inputs
Description of the input	EN 61131-2 types 1 and 3
Connection method	Spring-cage connection
	1-wire
Number of inputs	8
Typical response time	1 ms
Input voltage	24 V DC (via voltage jumper)
Input voltage range "0" signal	-3 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC

## Inline terminal - IB IL 24 DI8/HD-PAC - 2700173

### Technical data

#### Digital inputs

Nominal input current at $U_{IN}$	typ. 2.4 mA
Typical input current per channel	2.4 mA
Delay at signal change from 0 to 1	1 ms
Delay at signal change from 1 to 0	1 ms

#### Standards and Regulations

Test section	5 V supply, incoming remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min.
	5 V supply, outgoing remote bus/7.5 V supply (bus logics) 500 V AC 50 Hz 1 min.
	7.5 V supply (bus logics)/24 V supply (I/O) 500 V AC 50 Hz 1 min.
	24 V supply (I/O) / functional earth ground 500 V AC 50 Hz 1 min.
Protection class	III, IEC 61140, EN 61140, VDE 0140-1

### Classifications

#### eCl@ss

eCl@ss 4.0	27240404
eCl@ss 4.1	27240404
eCl@ss 5.0	27242204
eCl@ss 5.1	27242604
eCl@ss 6.0	27242604
eCl@ss 7.0	27242604
eCl@ss 8.0	27242604
eCl@ss 9.0	27242604

#### ETIM

ETIM 2.0	EC001433
ETIM 3.0	EC001599
ETIM 4.0	EC001599
ETIM 5.0	EC001599

#### UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	39121311
UNSPSC 12.01	39121311
UNSPSC 13.2	39121311

# Inline terminal - IB IL 24 DI8/HD-PAC - 2700173

## Approvals

### Approvals

---

#### Approvals

UL Listed / cUL Listed / LR / ABS / RINA / BSH / BV / EAC / cULus Listed

---

#### Ex Approvals

UL Listed / cUL Listed / cULus Listed

---

#### Approvals submitted

---

### Approval details

UL Listed 

cUL Listed 

LR

ABS

RINA

BSH

BV

EAC

cULus Listed 

## Inline terminal - IB IL 24 DI8/HD-PAC - 2700173

### Accessories

#### Accessories

#### Front adapter

Front adapters - FLKM 14-PA-INLINE/DIO8 - 2900889



VARIOFACE front adapter for Inline HD modules, for transferring 8 digital signals.

---

### I/O component

Inline terminal - IB IL PD 24V-PAC - 2862987



Inline terminal for power distribution (24 V), complete with accessories, (connector and labeling field) 24 V supply voltage is fed out from the segment circuit (US)

Inline terminal - IB IL PD GND-PAC - 2862990



Inline terminal for power distribution (GND), complete with accessories, (connector and labeling field) connections for GND

---

### Labeling panel

Labeling field - IB IL FIELD 2 - 2727501

Labeling field, width: 12.2 mm



---

### Plug

# Inline terminal - IB IL 24 DI8/HD-PAC - 2700173

## Accessories


Inline connector - IB IL SCN-8 - 2726337

Connector, for digital 1, 2 or 8-channel Inline terminals




## Drawings

Block diagram

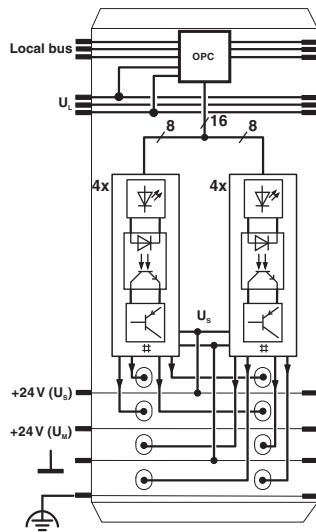


Connection diagram



Internal wiring of the terminal points

## Inline terminal - IB IL 24 DI8/HD-PAC - 2700173

Dimensional drawing

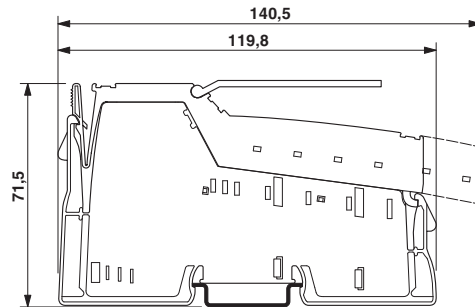

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2700173](#)