

A durable three pin, fused panel plug, with 0,5mm solder lug / spade terminals. Can be mounted above the panel on any thickness of material or below the panel for up to 2,5mm thick material. Suitable for use on measuring instruments, SMPS, ITE and OA.

For panel cut-out, use punch number 074-0040 (pull through) or 024-0010 (punch and die).

Weight approximately 10g.

Approvals TUV and NRTL/C

MATERIAL

HOUSING : Nylon 66, black
UB 04 V0

CONTACTS : Brass, nickel plate

ELECTRICAL

Current Rating : 10 Amps

Voltage Rating : 250 V_{ac}


Insulation : 1000 MM @ 500 V_{ac}

Resistance


Withstanding Voltage : 2000 V_{ac} for 1 minute
between line to gnd.

Temperature Range : -20°C to +80°C

Dimensions

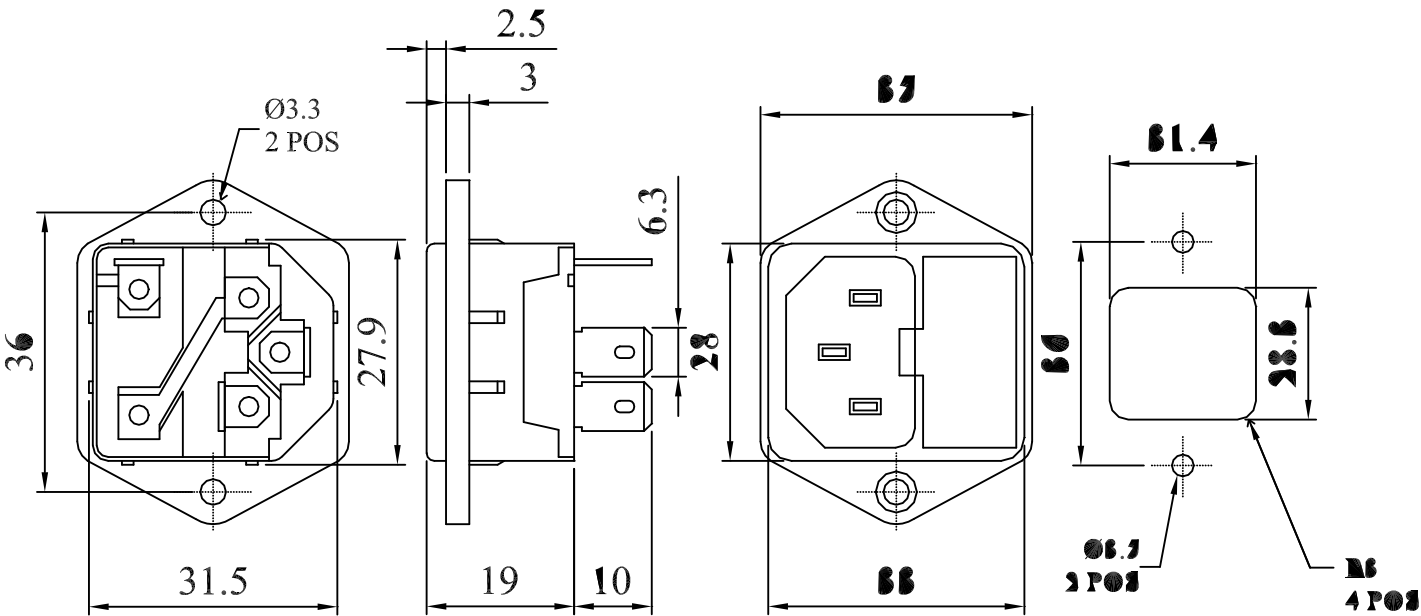

CONVERTED FROM PS0901 ISS2 (22.06.98) IN JAN 2003

| | | | | | | |
|--|---------|--|-------------|---------------------|---|------------|
| DrgNo 522-0010 | | TITLE FUSED MAINS CONNECTOR - PANEL PLUG | | | ALL DIMENSIONS IN MM ANGLES IN DECIMAL DEGREES | |
|  | ISSUE 3 | GENERAL SPECIFICATION FOR 522-0010 | | CUSTOMER FILTER REF | | |
| | | Aprvd Date 19.02.08 | Aprvd By MC | Drwn by BS | Scale: NTS | Sheet 1/ 1 |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Deltron:](#)

[522-0010](#)