


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		D	REVISED PER ECO-14-011808	09AUG2014	AP	SB

D



C

B


A

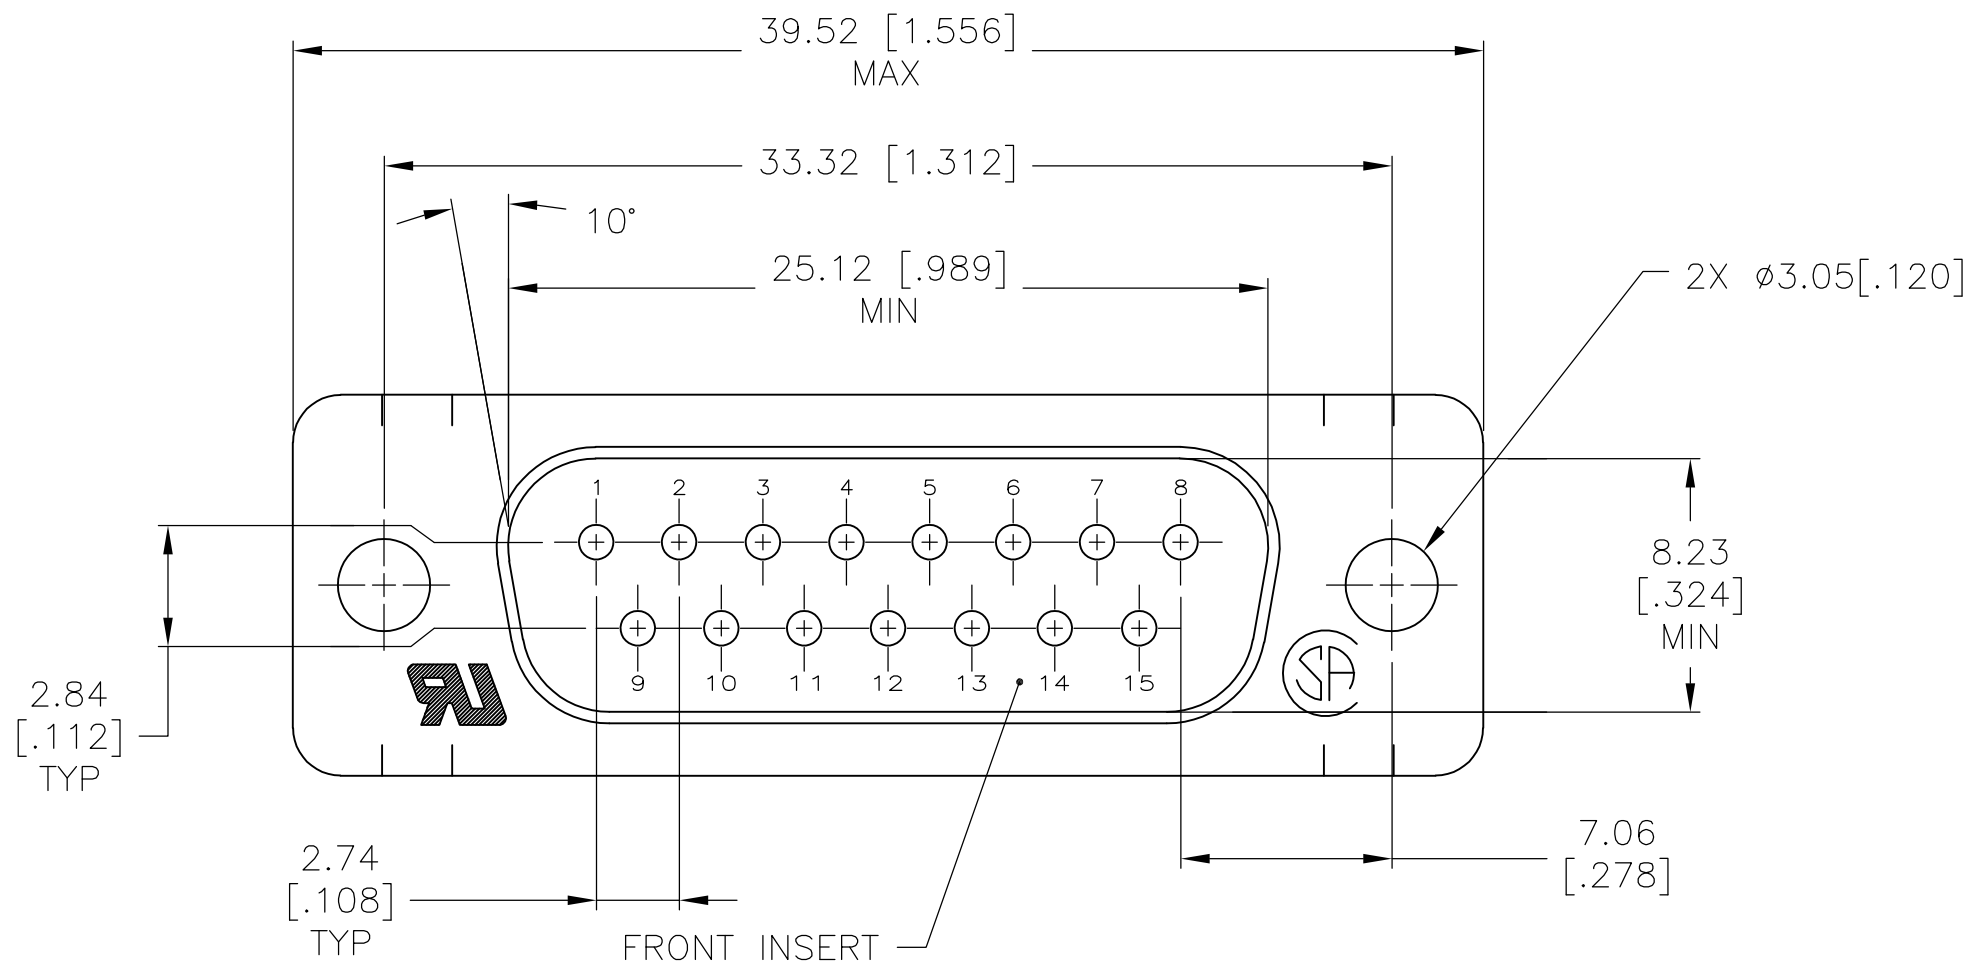

TYCO, PART NO & DATE CODE
MARKED IN AREA INDICATED,
ON FAR SIDE

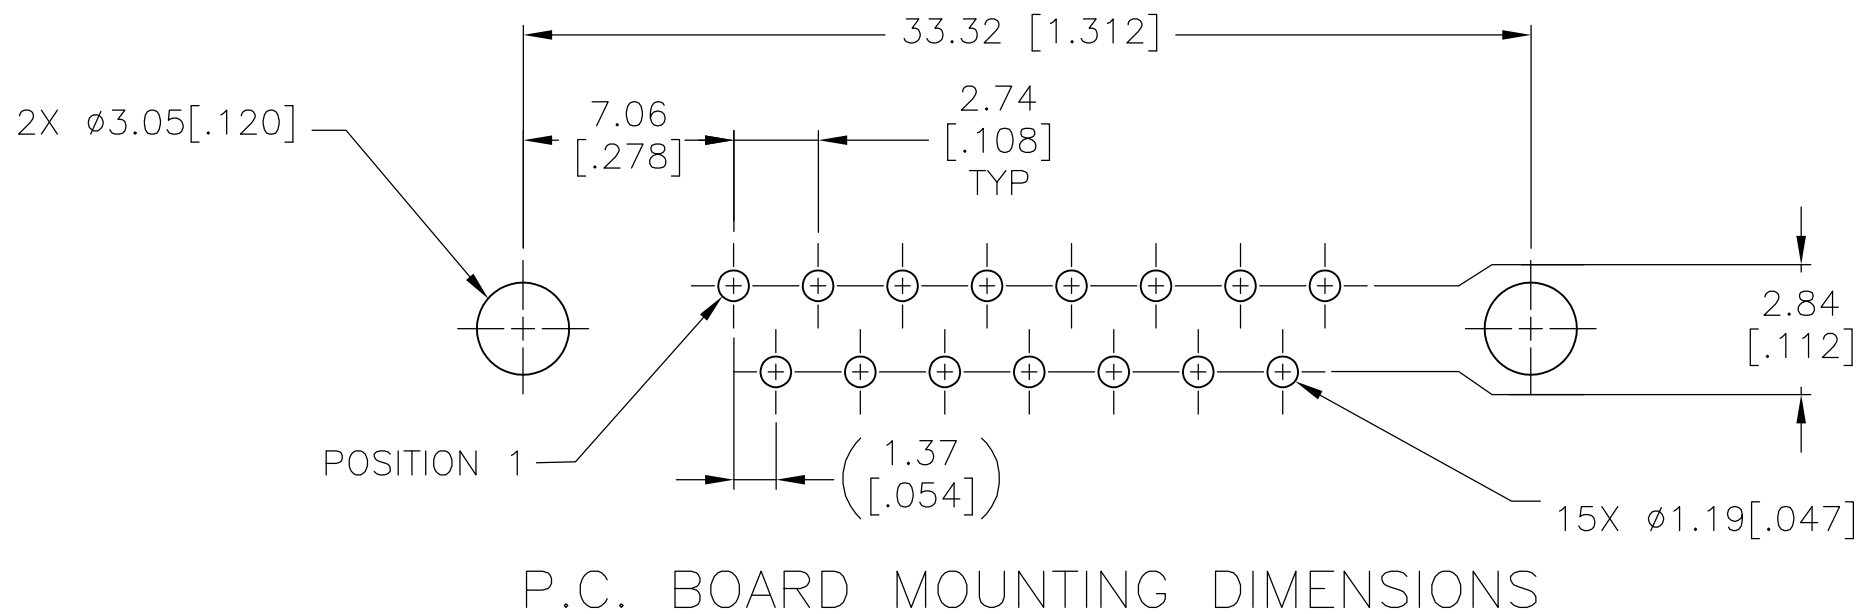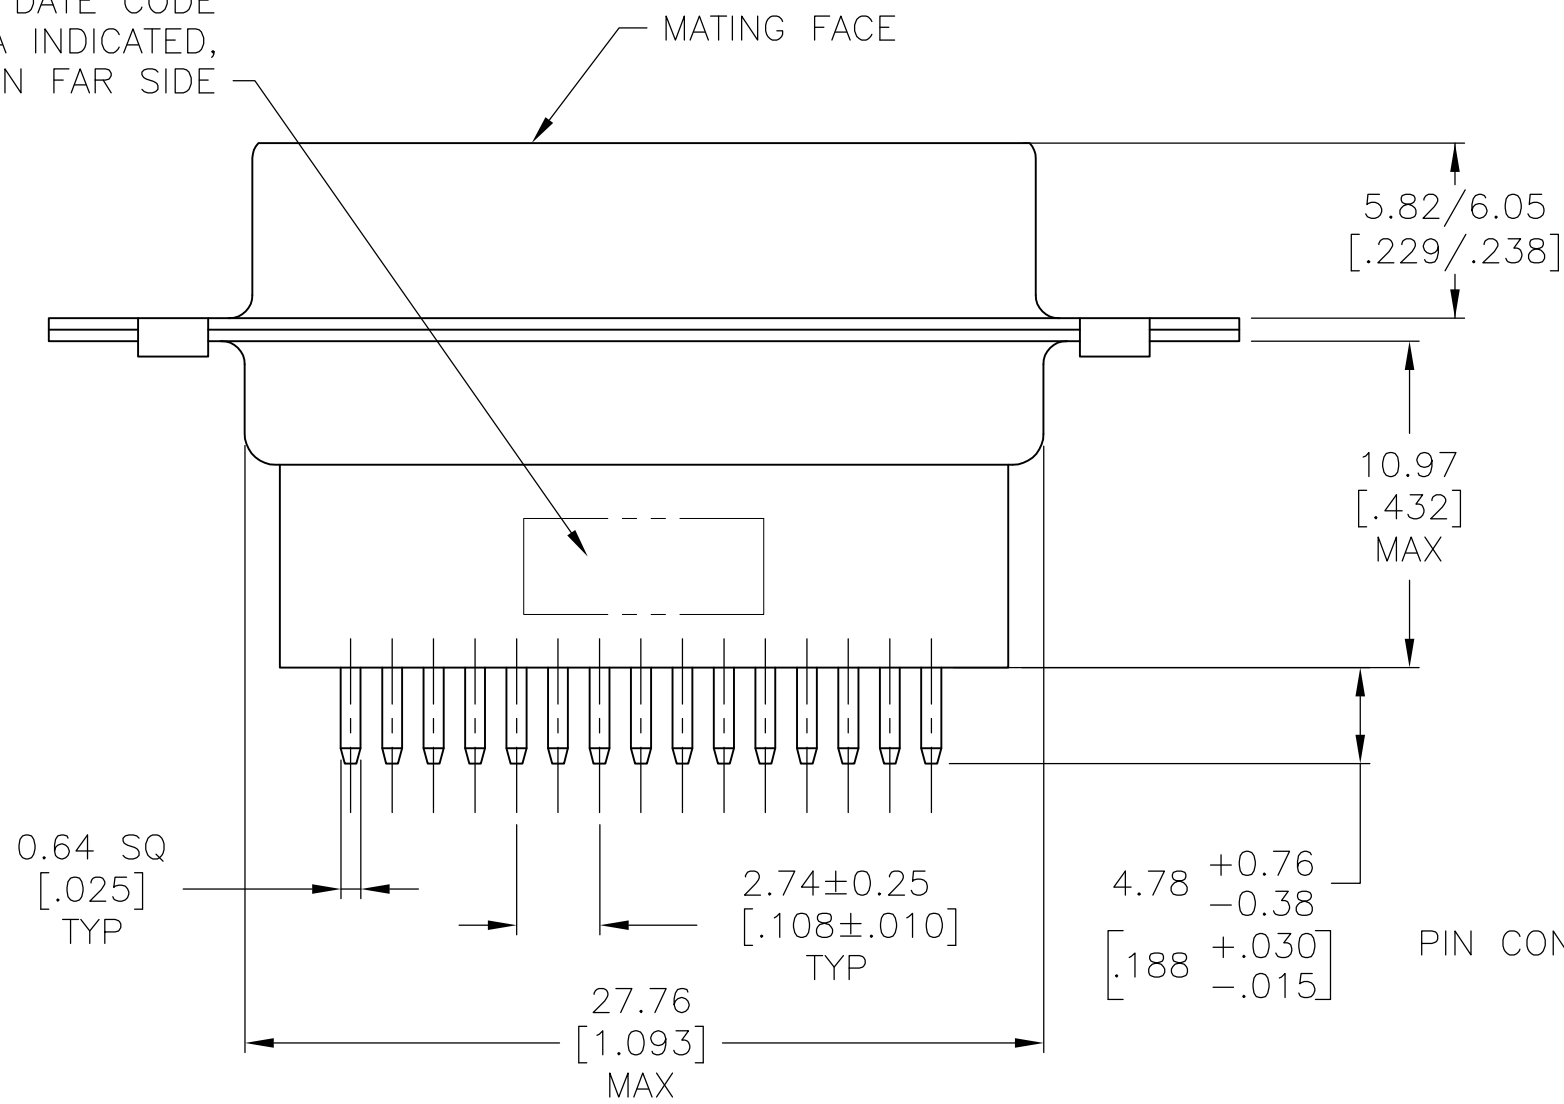

- ⚠ MOLDED PARTS: GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK
SHELLS: CARBON STEEL
CONTACTS: BRASS
- ⚠ SHELLS: 5.08µm [.000200] MIN ZINC WITH YELLOW CHROMATE COATING.
CONTACTS: GOLD PLATED FOR LENGTH OF 3.81 [.150] MIN FROM MATING END,
0.76µm [.000030] MIN GOLD IN MATED AREA,
2.54µm [.000100] MIN TIN ON SOLDER END, BOTH OVER
1.27µm [.000050] MIN NICKEL.
OR
GOLD FLASH OVER PALLADIUM-NICKEL PLATED FOR LENGTH OF 3.81 [.150] MIN FROM MATING END,
0.76µm [.000030] MIN TOTAL IN MATED AREA,
2.54µm [.000100] MIN TIN ON SOLDER END, BOTH OVER
1.27µm [.000050] MIN NICKEL.

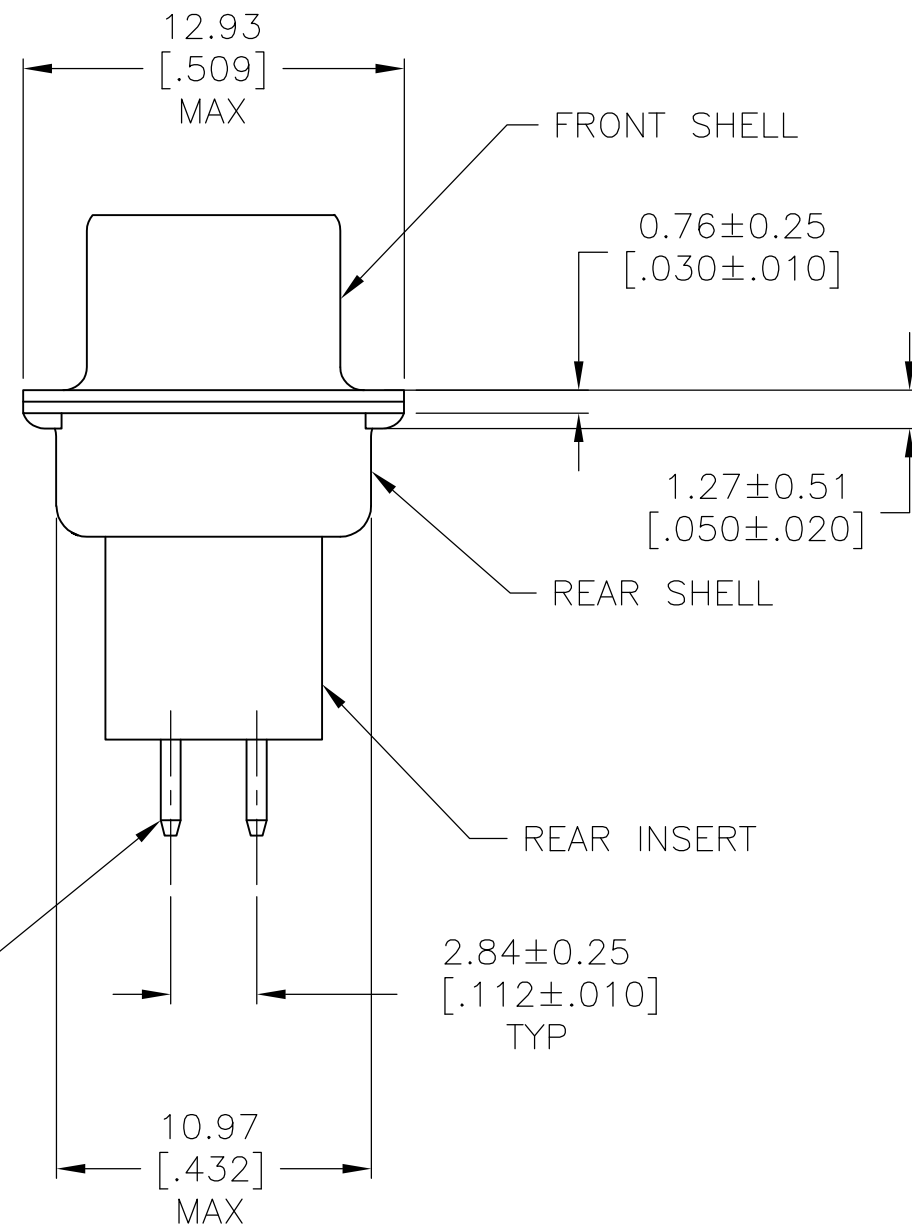

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LATTUCA 02SEPT05	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK S. BOLASH 02SEPT05				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. WALMSLEY 02SEPT05	NAME			
0 PLC ± -		PRODUCT SPEC	PLUG ASSY, SIZE 2, 15 POS, VERTICAL, AMPLIMITE HDP			
1 PLC ± -		APPLICATION SPEC	114-40013			
2 PLC ± 0.13 [.005]		WEIGHT -	A2 00779 C=5205735			
3 PLC ± -		CUSTOMER DRAWING	SCALE NTS SHEET 1 of 1 REV D			
4 PLC ± -						
ANGLES ± 2°						
FINISH						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5205735-7](#)