

PRODUCT NUMBER  
SEE TABLE

PUSH TO  
INSTALL




FIGURE 1  
NOTE 3

TO TEST LATCH  
RETENTION

HAND TOOL HT-80




FIGURE 2  
NOTE 4




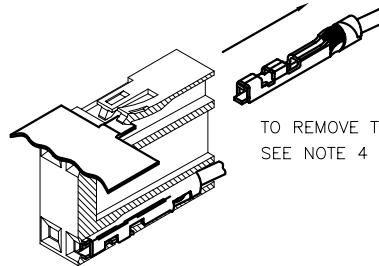


FIGURE 3

TO REMOVE TERMINAL  
SEE NOTE 4

NOTES:

1. MOLDING MATERIAL: MODIFIED POLYPHENYLENE ETHER, COLOR: BLACK, MEETING UL 94V-0.
2. PIN LENGTH TO BE .210/5.33 MIN. RECOMMENDED PIN LENGTH IS .225±0.015 [5.72±0.38].
3. TO LATCH TERMINAL PUSH AS SHOWN IN FIGURE 1. BE SURE THAT LATCH SNAPS DOWN.
4. TO REMOVE TERMINAL; PUSH TERMINAL FORWARD, LIFT LATCH WITH HAND TOOL AS SHOWN IN FIGURES 2 & 3. DAMAGE TO LATCH MAY OCCUR IF LIFTED MORE THAN A 25° ANGLE TO THE TOP OF HOUSING.
5. SEE MINI PV™ TERMINAL TA-75 FOR CORRECT CRIMP HEIGHT FOR EACH DIFFERENT WIRE SIZE. IF THIS SPECIFICATION IS NOT MET LATCHING WILL NOT BE SATISFACTORY. PRODUCT SPECIFICATION: BUS-12-067.
6. THIS HOUSING IS INTENDED FOR USE WITH MINI PV™ TERMINAL WITH 22-36 GAUGE WIRE.
7. MOLDING IS PRIMARY MANUFACTURING METHOD. SOLVENT BONDING IS OPTIONAL.
8. PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
9. THE PRODUCT IS NOT INTENDED TO BE EXPOSED TO MANUFACTURING SOLDER PROCESS.

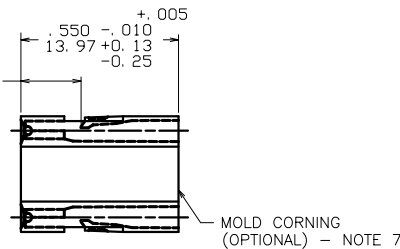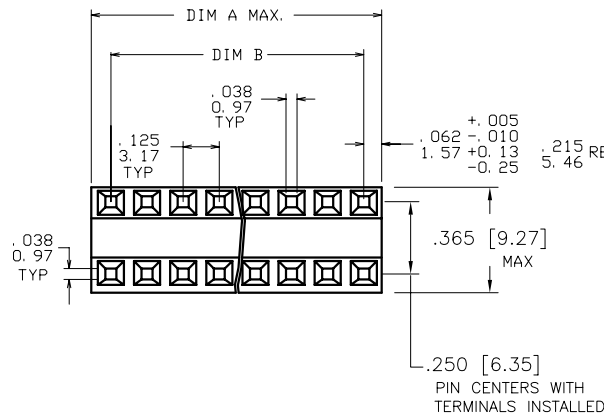

mat'l. code				surface	tolerance	projection	product family		
SEE NOTE 1				✓			PV HOUSINGS		
ltr	ec'n no	dr	date	tolerances unless otherwise specified			title		
J	v51043	LSS	1995-09-20	angles	linear	XX+01/XX+3	MINI LATCH HOUSING DR		
K	v03-1357	PJ	2004-02-06			XXX+005/XXX+13			
L	v05-0713	DAI	2005-07-28	0°±2'		XXXX+0020/XXX+051	.125 [3.18] X .250 [6.35]CC		
M	v06-0419	HTB	2006-05-02	dr	L. SANDERS	1995-09-20	dwg no		
N	v07-0492	HTB	2007-07-27	engr	T. HANNA	1995-09-20	sheet 1 of 3		
				chr	T. BREWBAKER	1995-09-20	65352		
				appd	T. BREWBAKER	1995-09-20	A3		
sheet	revision	N	N	N			type		
index	sheet	1	2	3			Product Customer Drawing		

1

2 3

4


5

6


PRODUCT NUMBER

SEE TABLE

STYLE A


STAMP .060/1.52 HIGH  
CHARACTERS

STYLE B

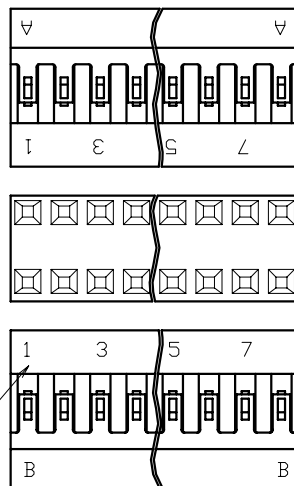

MARK 1,3,5,7,ETC LETTERS  
AS SHOWN .060/1.52 HIGH  
CHARACTERS BOTH SIDES.  
ALSO MARK "A" ON FIRST  
AND LAST POS OF ONE SIDE  
AND "B" ON FIRST AND LAST  
POS OF THE OTHER AS  
SHOWN

STYLE C

NOTE 16

MARK COMPANY LOGO, PART NO,  
AND CAVITY NO APPROX AS  
SHOWN, IN WHITE .060/1.52  
HIGH CHARACTERS, ON HOUSINGS  
WITH 10 OR MORE CAVITIES. ON  
HOUSINGS WITH LESS THAN 10  
CAVITIES, MARK CAVITY  
NUMBERS ONLY.FCJ  
FCconnect.com

Copyright FCJ

mat'l. code SEE NOTE 1				surface ✓		tolerance		projection 		product family PV HOUSINGS			
ltr	ec'n no	dr	date	tolerances unless otherwise specified						title			
N				angles linear	XX+01/X+3		INCH/MM  scale 1:1		MINI LATCH HOUSING DR .125 [3.18] X .250 [6.35]CC				
			XXX+005/XXX+13										
			0°±2' XXXX+0020/XXX+051										
				dr	L. SANDERS	2005-09-26			dwg no		sheet 2 of 3	size	
				engr	T. HANNA	2005-09-26			65352		A3		
				chr	T. BREWBAKER	2005-09-26			type Product Customer Drawing				
				appd	T. HANNA	2005-09-26							
sheet index		revision sheet											

form A3

1

2

3

4

5

6



FCJconnect.com

Copyright FCJ

PRODUCT NO.	NO. OF POS	DIM A MAX	DIM B
65352-001LF	2 X 36	4.500/114.30	4.375/111.13
65352-002LF	2 X 35	4.375/111.13	4.250/107.95
65352-003LF	2 X 34	4.250/107.95	4.125/104.78
65352-004LF	2 X 33	4.125/104.78	4.000/101.60
65352-005LF	2 X 32	4.000/101.60	3.875/98.43
65352-006LF	2 X 31	3.875/98.43	3.750/95.25
65352-007LF	2 X 30	3.750/95.25	3.625/92.08
65352-008LF	2 X 29	3.625/92.08	3.500/88.90
65352-009LF	2 X 28	3.500/88.90	3.375/85.73
65352-010LF	2 X 27	3.375/85.73	3.250/82.55
65352-011LF	2 X 26	3.250/82.55	3.125/79.38
65352-012LF	2 X 25	3.125/79.38	3.000/76.20
65352-013LF	2 X 24	3.000/76.20	2.875/73.03
65352-014LF	2 X 23	2.875/73.03	2.750/69.85
65352-015LF	2 X 22	2.750/69.85	2.625/66.68
65352-016LF	2 X 21	2.625/66.68	2.500/63.50
65352-017LF	2 X 20	2.500/63.50	2.375/60.33
65352-018LF	2 X 19	2.375/60.33	2.250/57.15
65352-019LF	2 X 18	2.250/57.15	2.125/53.98
65352-020LF	2 X 17	2.125/53.98	2.000/50.80
65352-021LF	2 X 16	2.000/50.80	1.875/47.63
65352-022LF	2 X 15	1.875/47.63	1.750/44.45
65352-023LF	2 X 14	1.750/44.45	1.625/41.28
65352-024LF	2 X 13	1.625/41.28	1.500/38.10
65352-025LF	2 X 12	1.500/38.10	1.375/34.93
65352-026LF	2 X 11	1.375/34.93	1.250/31.75
65352-027LF	2 X 10	1.250/31.75	1.125/28.58
65352-028LF	2 X 9	1.125/28.58	1.000/25.4
65352-029LF	2 X 8	1.000/25.4	.875/22.23
65352-030LF	2 X 7	.875/22.23	.750/19.05
65352-031LF	2 X 6	.750/19.05	.625/15.88
65352-032LF	2 X 5	.625/15.88	.500/12.7
65352-033LF	2 X 4	.500/12.7	.375/9.53
65352-034LF	2 X 3	.375/9.53	.250/6.35
65352-035LF	2 X 2	.250/6.35	.125/3.18

PRODUCT NO.	NO. OF POS	DIM K MAX	DIM L	SPECIAL MARKING	SPECIAL MISC	CUSTOMER RESTRICTED
65352-036LF	2 X 10	1.250/31.75	1.125/28.58	STYLE A	x	x
65352-037LF	2 X 20	2.500/63.5	2.375/60.33	STYLE A	x	x
65352-038LF	2 X 20	2.500/63.5	2.375/60.33	STYLE B		x
65352-039LF	2 X 22	2.750/69.85	2.625/66.68	STYLE B		x
65352-040LF	2 X 13	1.625/41.28	1.500/38.1	STYLE B		x
65352-041LF	2 X 12	1.500/38.1	1.375/34.93	STYLE B		x
65352-042LF	2 X 9	1.125/28.58	1.000/25.4	STYLE B		x
65352-043LF	2 X 14	1.750/44.45	1.625/41.28	STYLE A	x	x
65352-044LF	2 X 14	1.750/44.45	1.625/41.28	STYLE C		

mat'l. code SEE NOTE 1				surface <input checked="" type="checkbox"/>		tolerance		projection		product family PV HOUSINGS	
ltr	ec'n no	dr	date	tolerances unless otherwise specified						title	
N				angles	linear	.XX+.01/.X+.3		INCH/MM		MINI LATCH HOUSING DR	
						.XXX+.005/.XX+.13				.125 [3.18] X .250 [6.35]CC	
				0'±2"		.XXXX+.0020/.XXX+.051		scale 1:1		dwg no	
				dr	L. SANDERS	1995-09-19				sheet 3 of 3	
				engr	T. HANNA	1995-09-19				size	
				chr	T. BREWBAKER	1995-09-19				A3	
				appd	T. HANNA	1995-09-19				type	
sheet index		revision sheet								Product Customer Drawing	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[65352-001LF](#) [65352-008LF](#) [65352-002LF](#)