
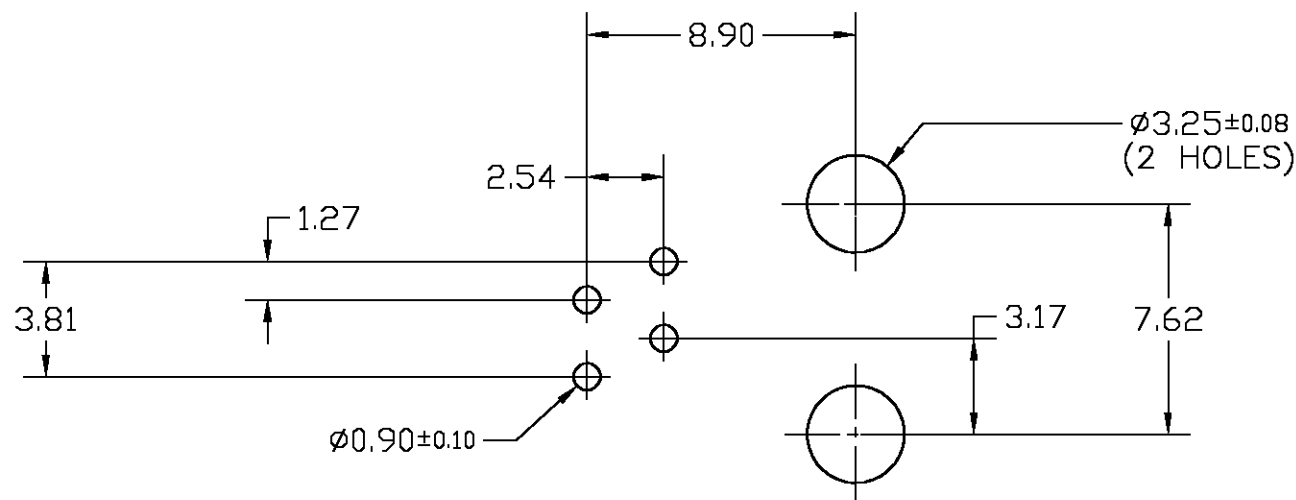
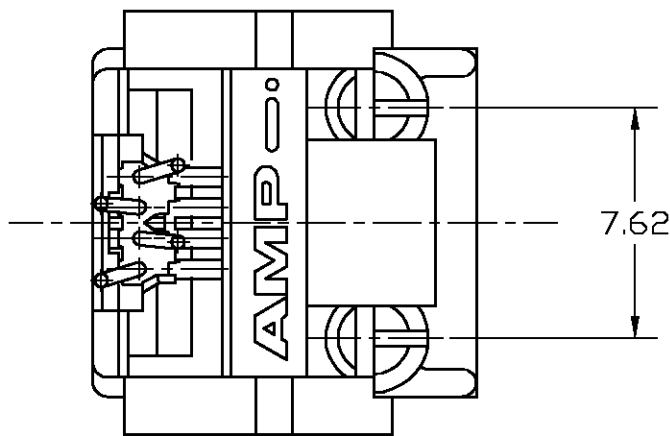
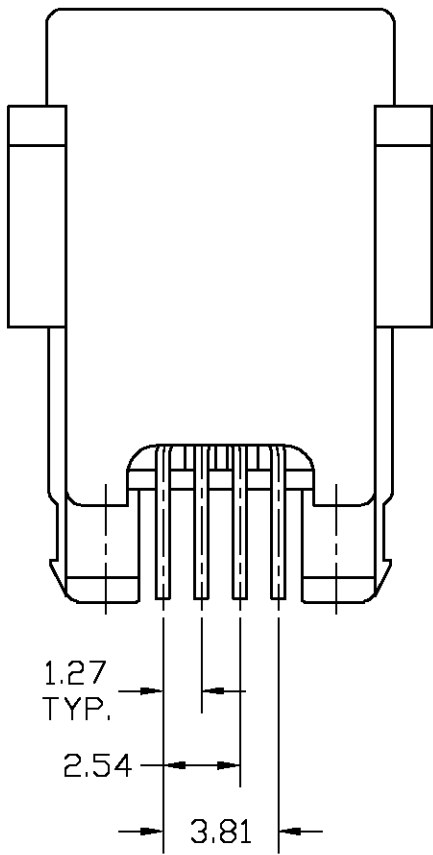
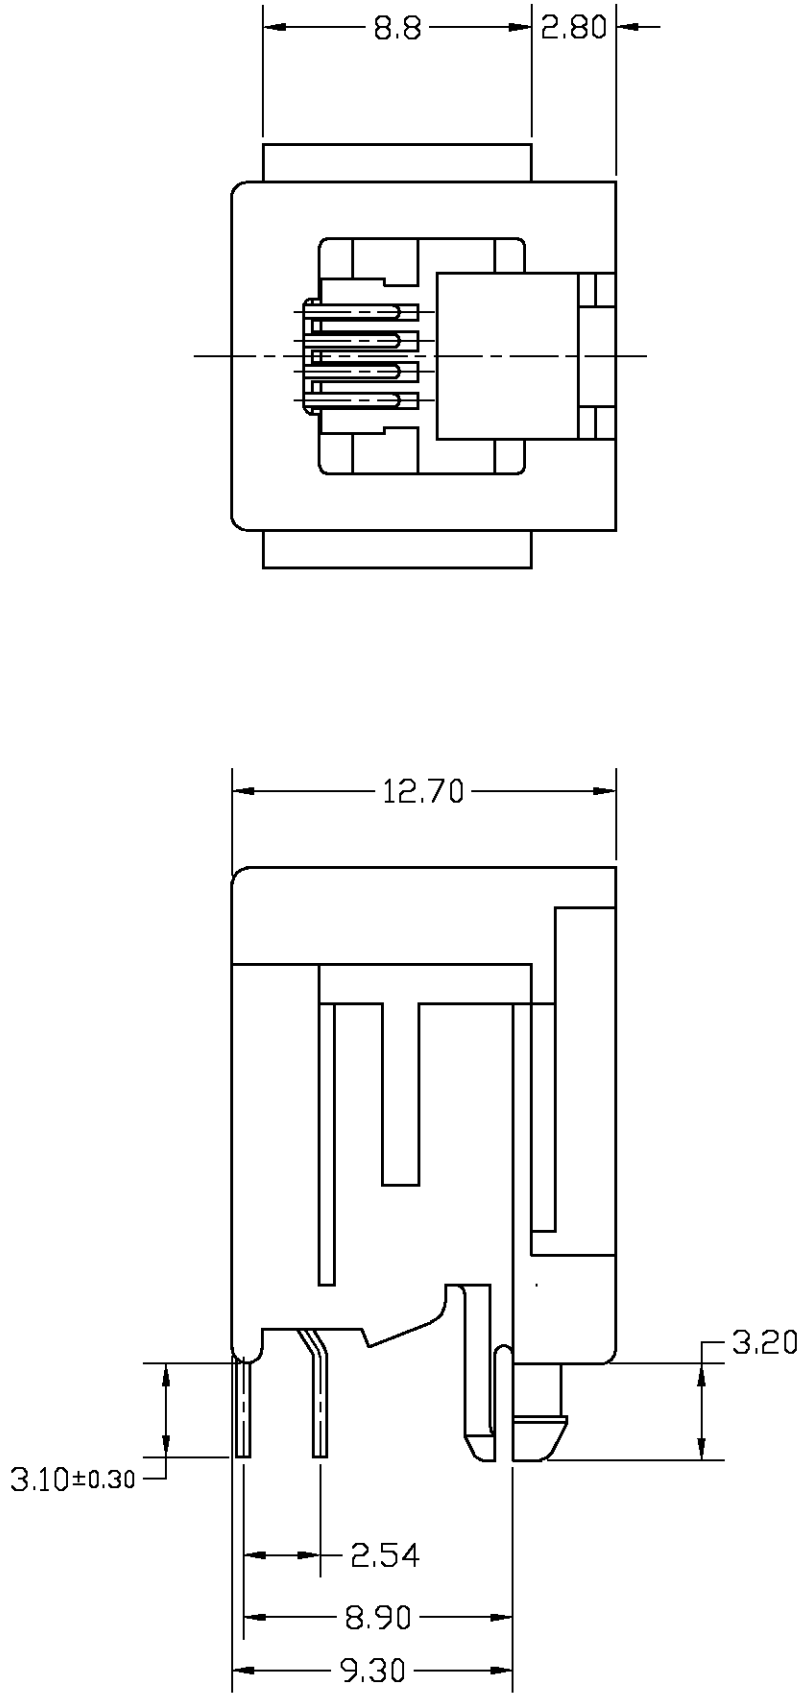


- NOTES:
- 1 TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0,15$
 - 2 FOR APPLICATION INFORMATION SEE AMP SPEC. 114-19019.
 - 3 FOR PERFORMANCE REQUIREMENTS SEE AMP SPEC. 108-19064

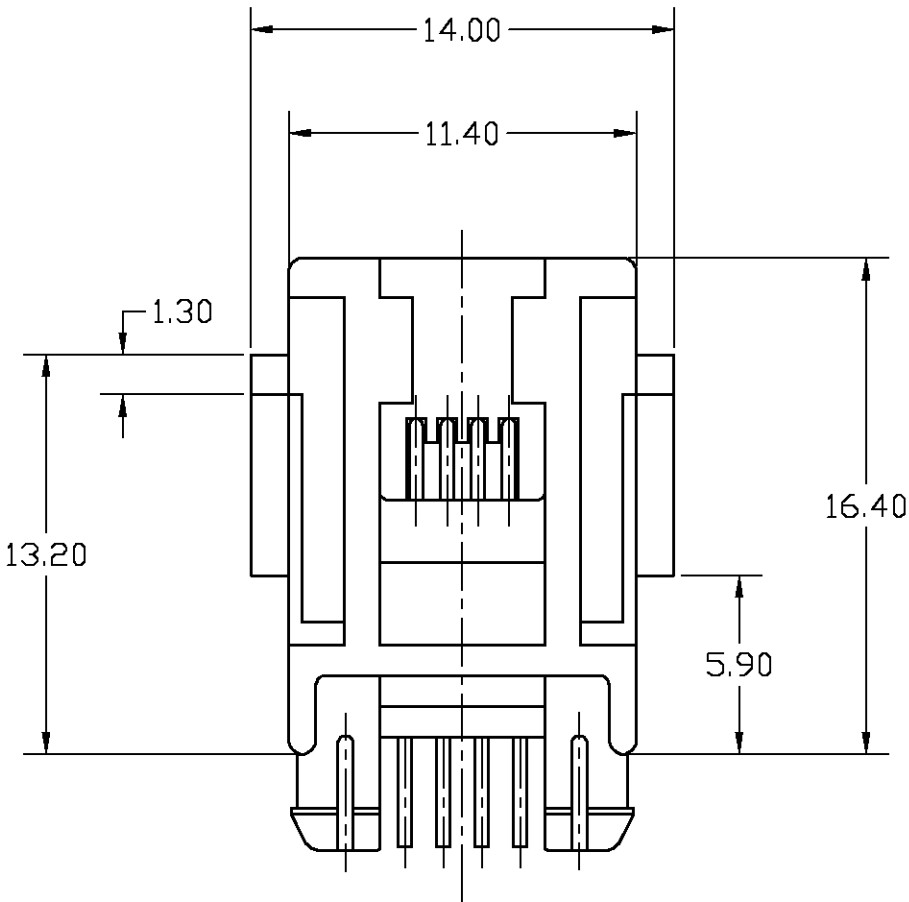

PRINTED CIRCUIT BOARD LAYOUT

VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.
TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0,05$.
PRINTED CIRCUIT BOARD THICKNESS: 1,6 mm NOMINAL.

1000 PCS ON A 60 CM DIA. REEL		4 POSITIONS/ 4 CONTACTS.		IN CONTACT AREA: 1,2µm MIN. SEL. GOLD OVER 1.2µm MIN. NICKEL <u>SOLDER TINES:</u> 2,0µm MIN. TIN-LEAD OVER 1.2µm MIN. NICKEL		HOUSING: PBT,UL 94-HB COLOR: BLACK <u>CONTACTS:</u> PHOSPHOR BRONZE		216546-1		
PACKAGING		REMARKS		FINISH		MATERIAL		PARTNUMBER		
					CUSTOMER DRAWING					FOR REFERENCE ONLY WILL NOT BE UPDATED
					© COPYRIGHT 19 BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED.AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING. THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION					,19
J	SR10-0119-01		KV	KV	23 APR 01					Tyco Electronics Corporation Oostkamp - BELGIUM
H	EH00-1248-98		EvE	MVE	26 OCT 98	NAME				MODULAR JACK 4 POS. TOP ENTRY SMALL SIZE WITH PANEL STOPS FOR PRINTED CIRCUIT BOARD
G	EH00-0244-96		MVE	G.C.	15 FEB 96					
F	EH00-0001-95		G.C.	CS	14 MAR 95					
E	EH00-0042-94		JvL	CS	31 JAN 94					
LTR.	REVISION RECORD		DR.	CHK.	DATE					
DR.: J.v.LIEMPT DATE: 31 JAN 94		CHK.: C.STERKEN DATE: -		APP.: L.v.SOEST DATE: -		DWG.No. C-216546		REV.LTR. J	SHEET 1 OF 1	A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[216546-1](#)