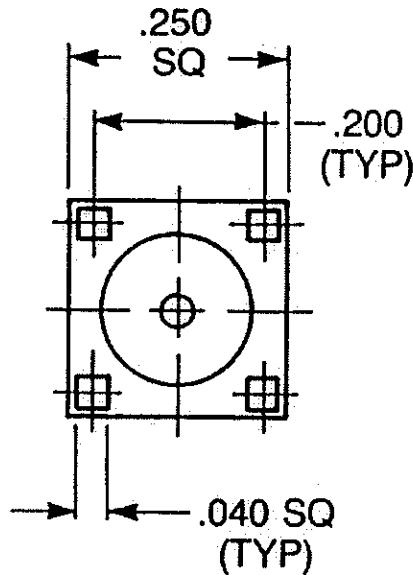
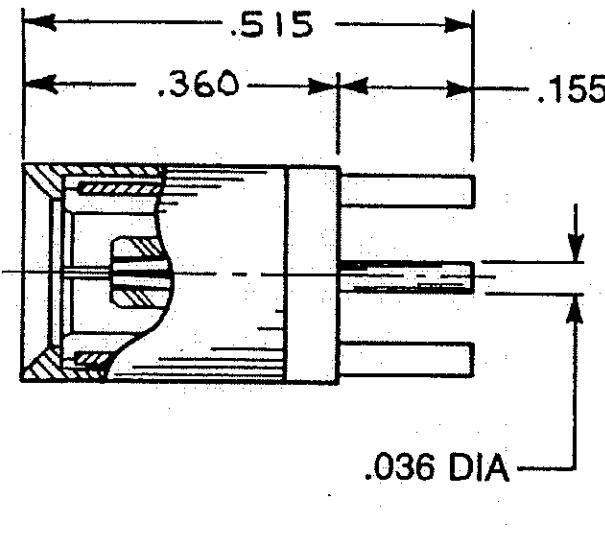


REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
A	ECO #9999	2-28-97	D.N.

**NOTES: CONFORMS TO MIL-PRF-39012****MATERIAL:**

1. BODY & SLEEVE = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
2. CONTACT & SPRING = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
3. INSULATOR = TEFLON, VIRGIN WHITE PER ASTM D1710, GRADE I, TYPE I, CLASS A.

PROPRIETARY INFORMATION
NOT TO BE RELEASED
WITHOUT WRITTEN PERMISSION
FROM AN AUTHORIZED
REPRESENTATIVE OF
APPLIED ENGINEERING PRODUCTS.

FINISHES:

1. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. ALL OTHER METAL PARTS = GOLD PLATE PER MIL-G-45204 TYPE II, CLASS O, GRADE C OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON FRAC. DECIMAL ANGLES $\pm 2^\circ$			DRAWN D.N.	DATE 2-28-97	APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Drive, P.O. Box 510 New Haven, CT 06513		
MATERIAL:			CHECKED <i>Mihm</i>	DATE 2/28/97	SLB STRAIGHT FEMALE PLUG RECEPTACLE		
SEE NOTES			APPROVED VPS	DATE 2-28-97	SIZE A		
SEE NOTES			FINISH: SEE NOTES	CODE IDENT NO. 19505	3025-1511-005		
SCALE NTS			REV. A	SHEET 1 OF 1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Radiall](#):

[3025-1511-005](#)