

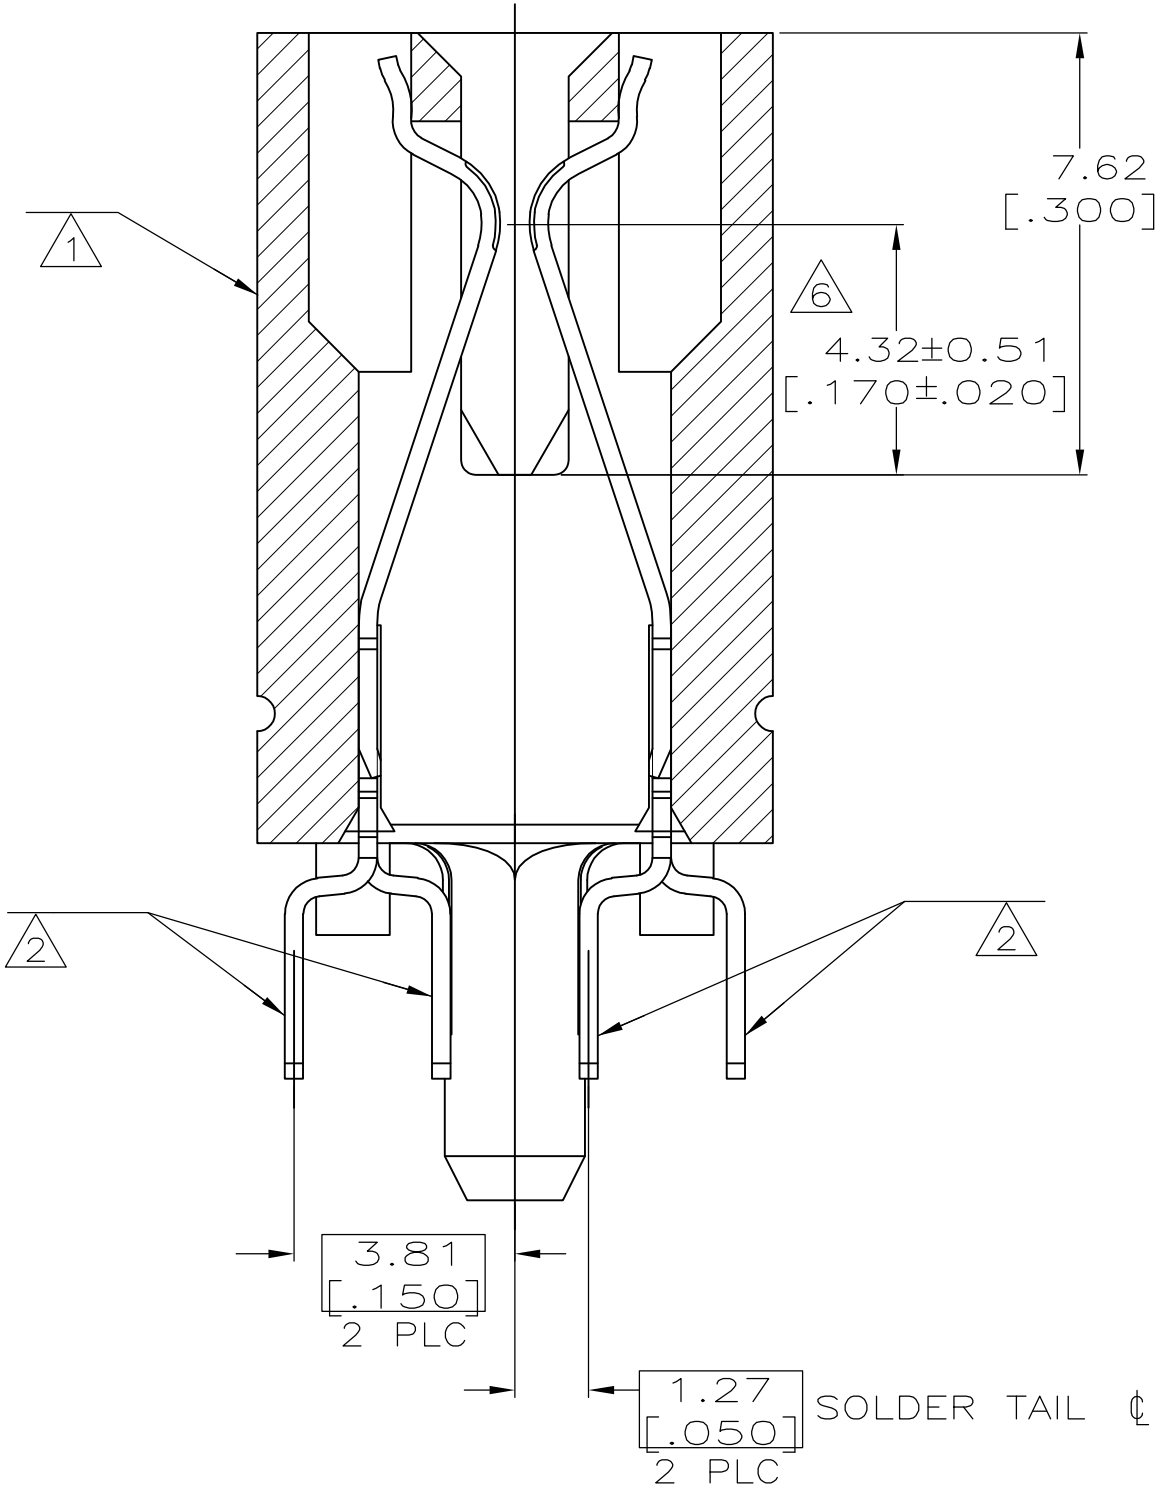


LOC		DIST		REVISIONS					
GP	00	P	LTR	DESCRIPTION			DATE	DWN	APVD
			F2	REVISED PER ECO-11-005033			25MAR11	RK	HMR

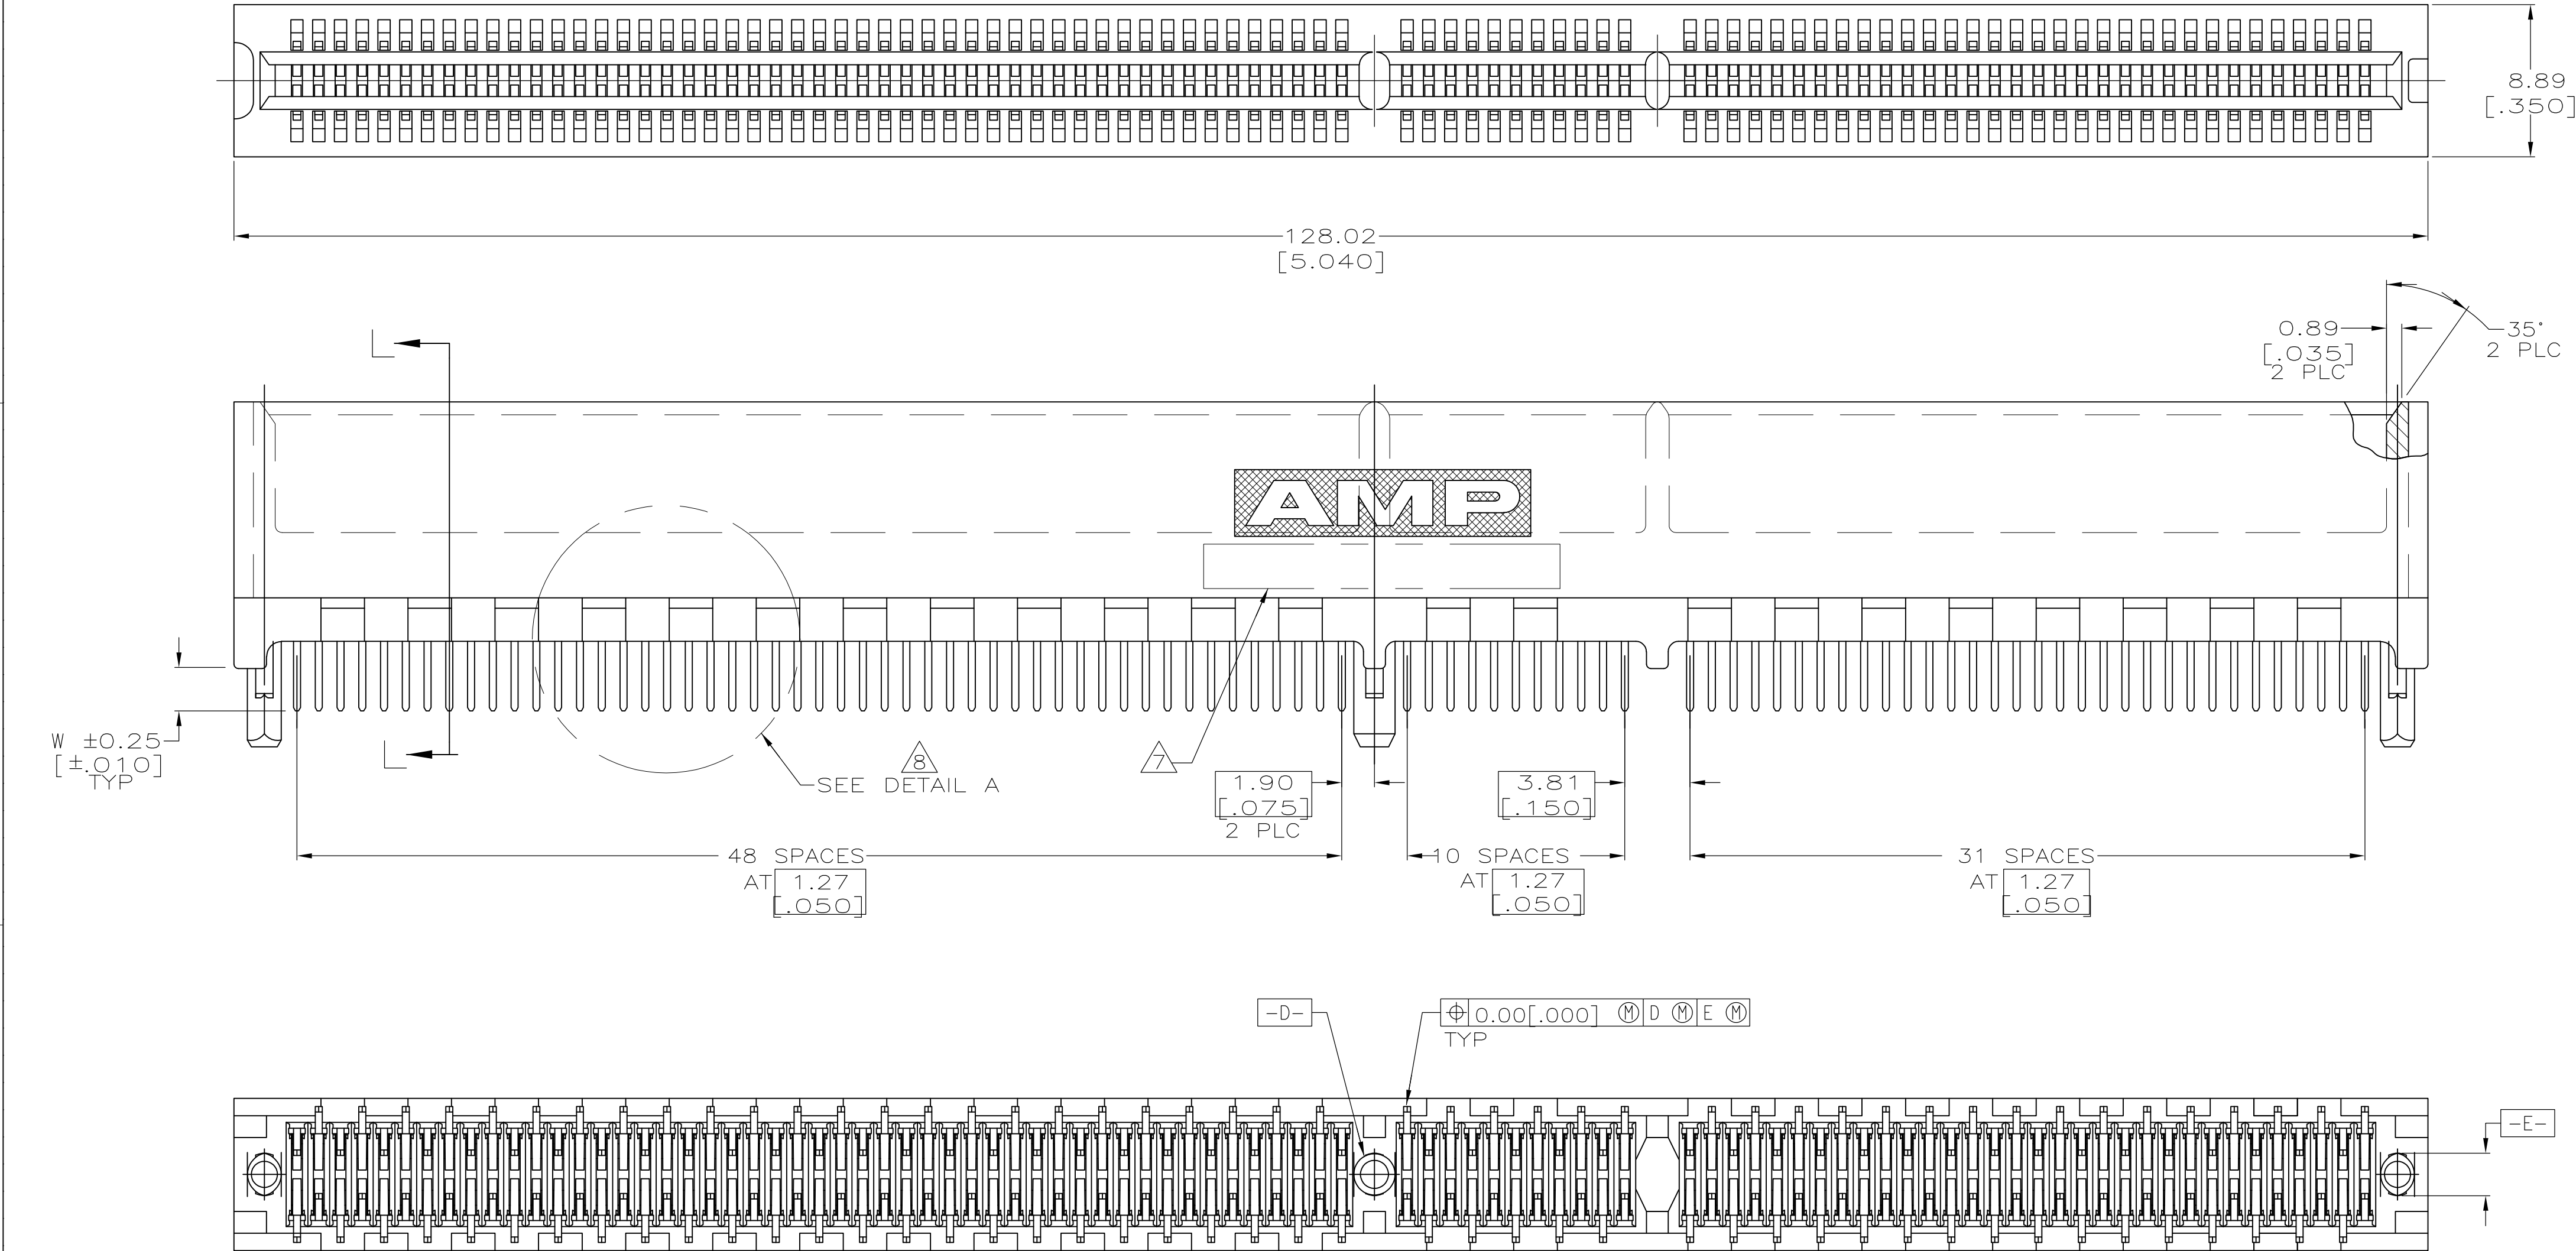

SECTION L-L
SCALE 8:1

SEE SHEET 2 FOR HOLE PATTERN

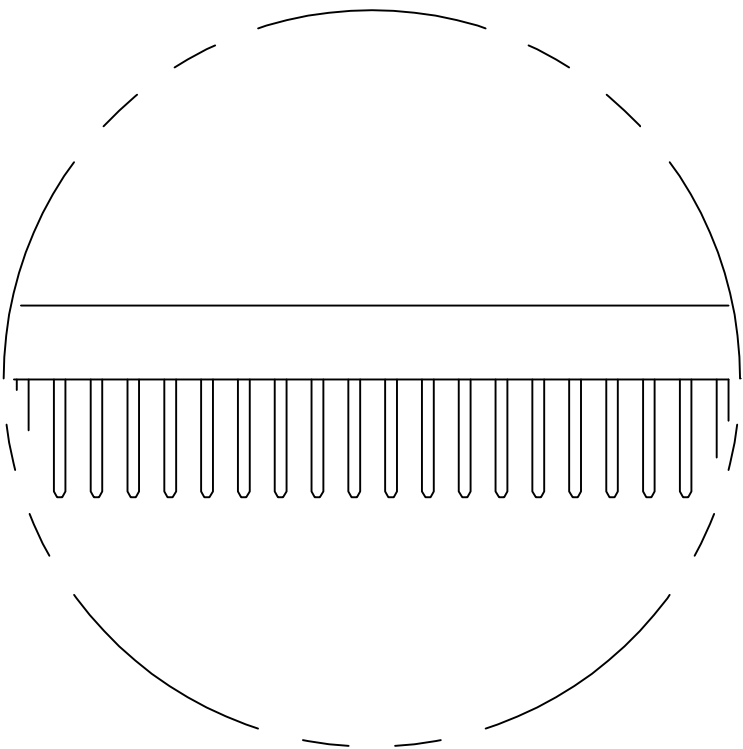

DETAIL A

- 1 HOUSING: HIGH TEMPERATURE THERMOPLASTIC. COLOR - NATURAL
- 2 CONTACT: PHOSPHOR BRONZE.
- 3 CONTACT FINISH: .001269[.000050] MIN NICKEL ALL OVER. GOLD FLASH OVER NICKEL IN CONTACT AREA. .002537[.000100] MIN TIN-LEAD OVER NICKEL ON SOLDER TAILS.
- 4 CONTACT FINISH: .001269[.000050] MIN NICKEL ALL OVER. .000375[.000015] MIN GOLD OVER NICKEL IN CONTACT AREA. .002537[.000100] MIN TIN-LEAD OVER NICKEL ON SOLDER TAILS.
- 5 CONTACT FINISH: .001269[.000050] MIN NICKEL ALL OVER. .000757[.000030] MIN GOLD OVER NICKEL IN CONTACT AREA. .002537[.000100] MIN TIN-LEAD OVER NICKEL ON SOLDER TAILS.
- 6 DISTANCE FROM CONTACT POINT TO BOTTOM OF CARD SLOT.
- 7 AMP PART NUMBER, DATE CODE AND CSA LOGO MARKED IN APPROXIMATE LOCATION SHOWN.
- 8 CORED OR SOLID SIDE WALLS ARE AT DISCRETION OF AMP INCORPORATED.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI


	3.56 [.140]	1-145166-2
	3.18 [.125]	145166-8
	2.54 [.100]	145166-4
OBSOLETE	2.54 [.100]	145166-3
9	2.54 [.100]	145166-2
OBSOLETE	2.54 [.100]	145166-1

W	FINISH	PART NUMBER
---	--------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN R BROWN 6/12/95				
				CHK M BOWERS 6/12/95				
				APVD M BOWERS 6/12/95				
				PRODUCT SPEC				
				108-14034				
				APPLICATION SPEC				
				114-26012				
				WEIGHT -				
				CUSTOMER DRAWING				

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C=145166	-

SCALE	4:1	SHEET	1	OF	2	REV	F2
-------	-----	-------	---	----	---	-----	----

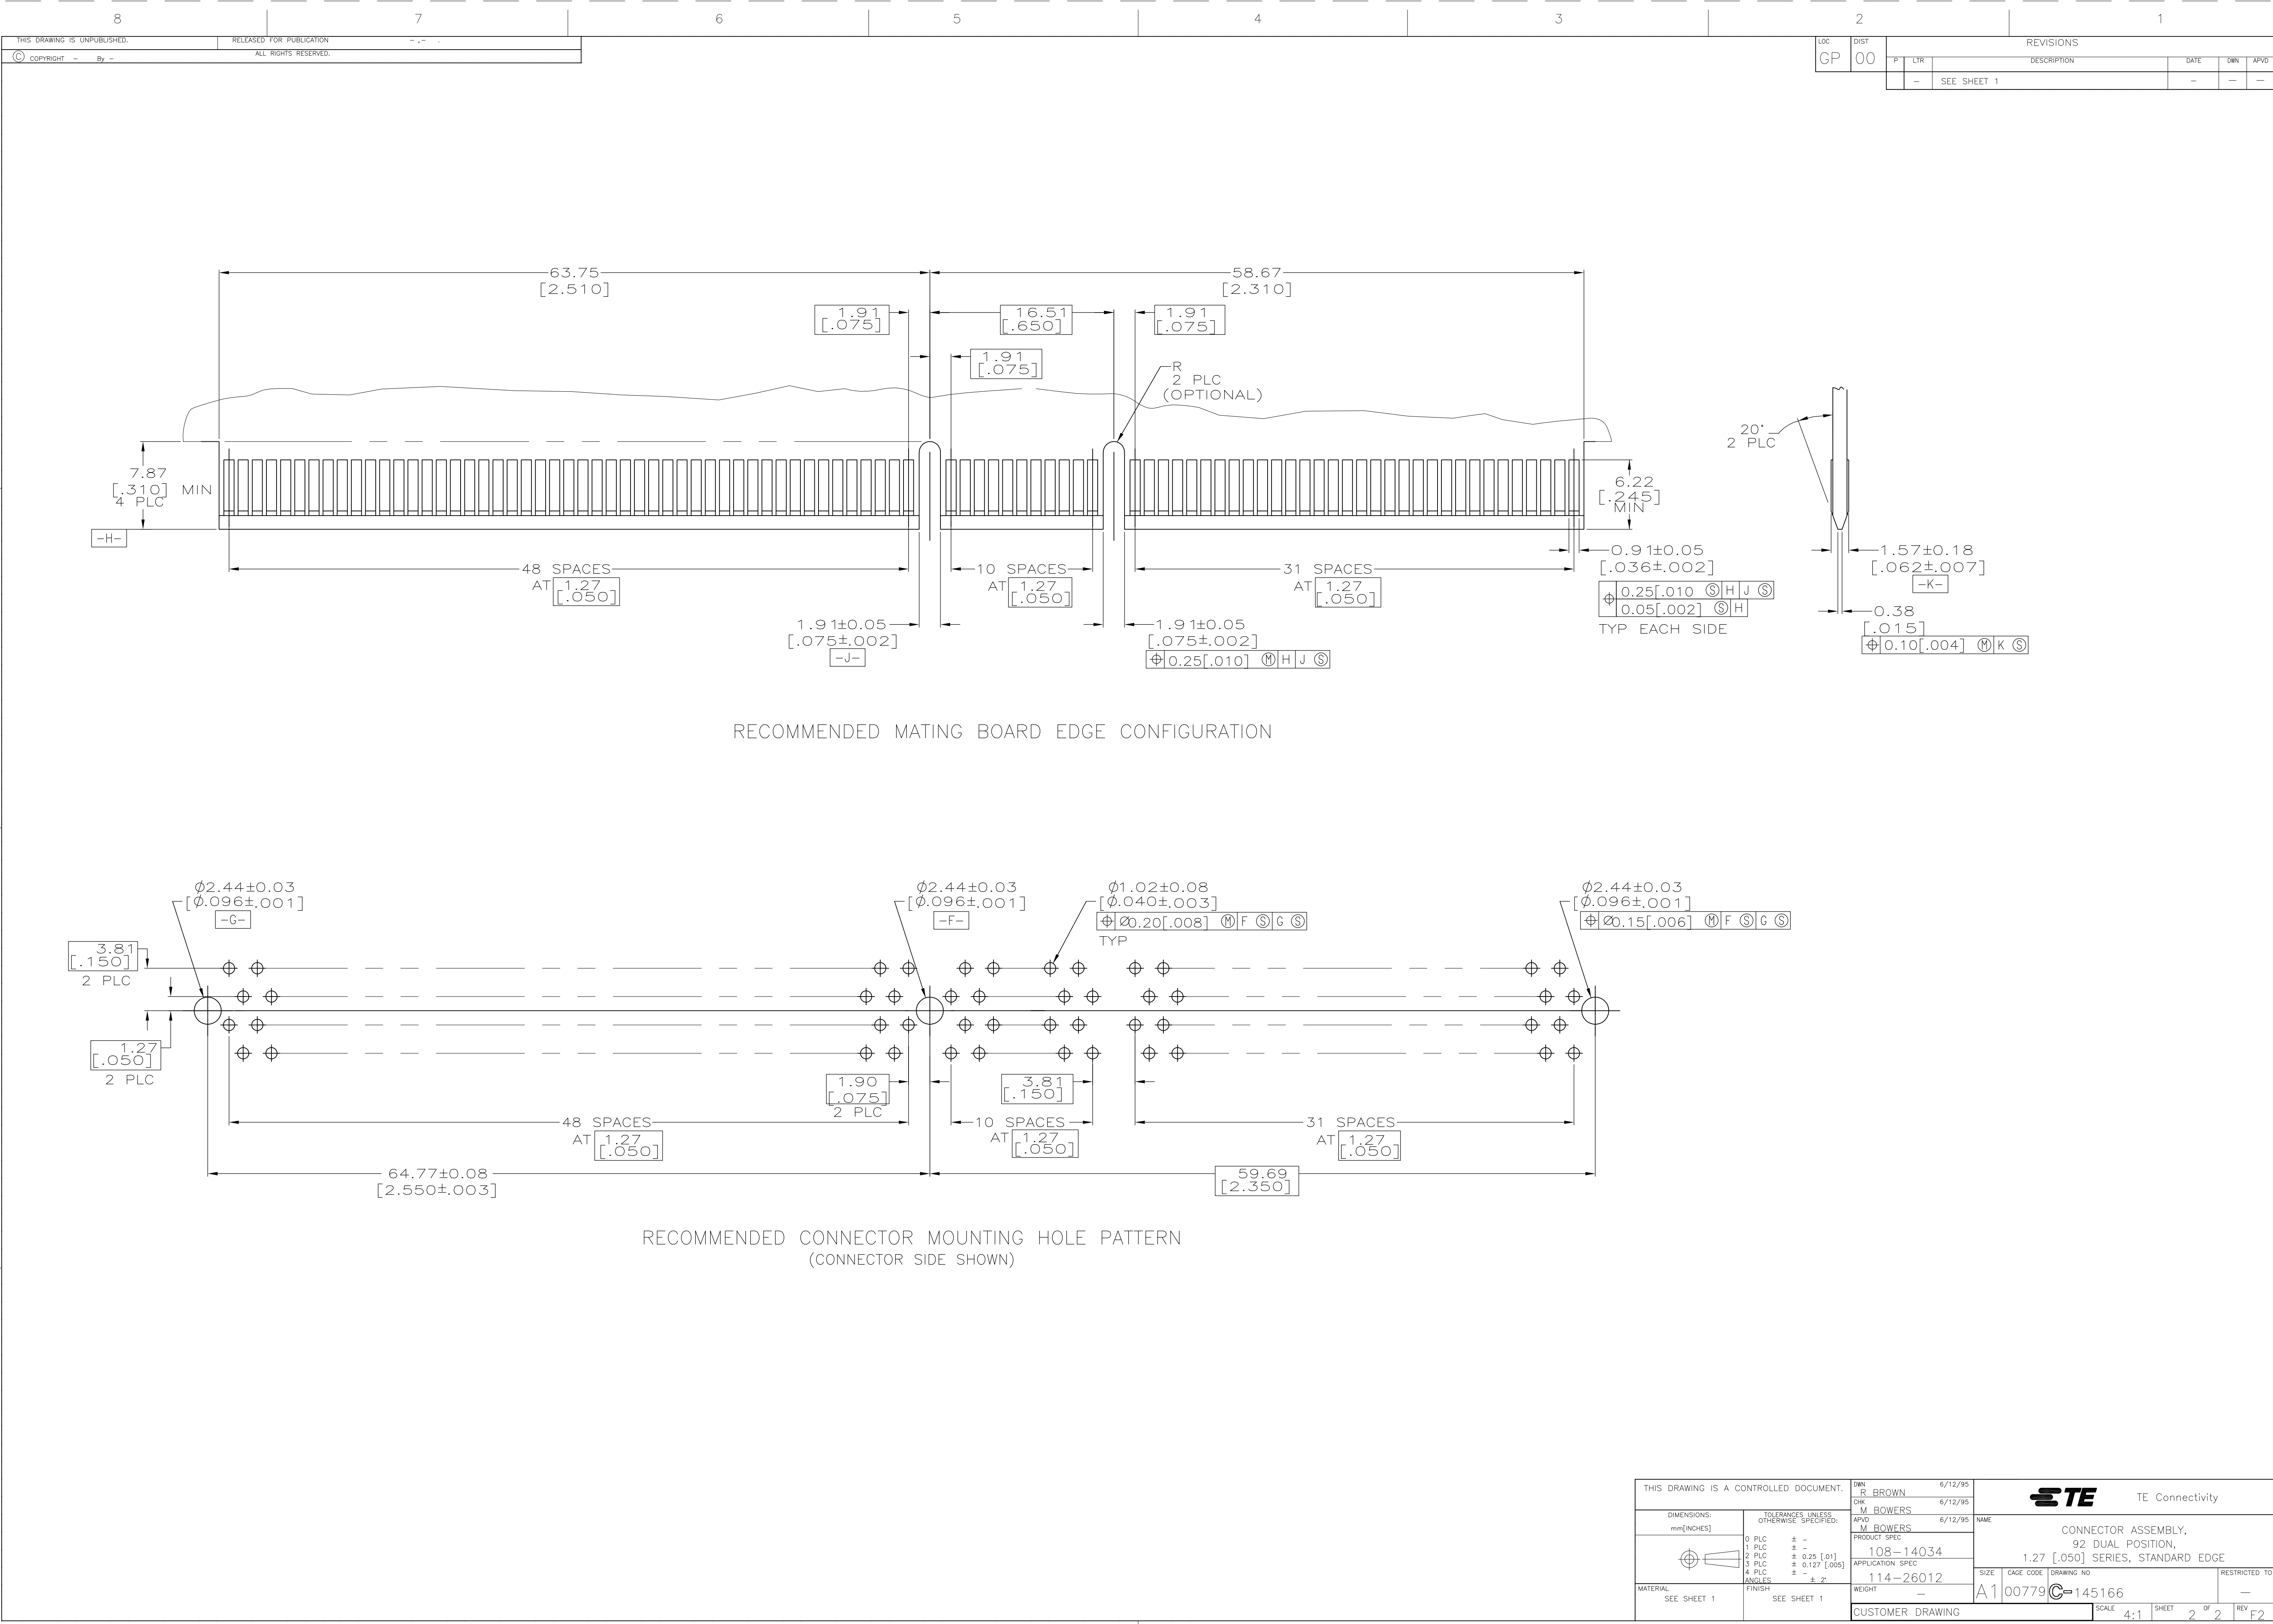

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-145166-2](#)