

# WAU16-400

### Electrical Specifications (@25C)

1. Primary Rating: 120V 60Hz (9W @ Full Load)
2. Primary Excitation Current: 55mA Max
3. Secondary Rating: 16VAC  $\pm$  5%, 400 mA AC
4. Secondary No-Load Rating: 18.60VAC Ref.
5. No load power (stand by):  $\leq$ 0.5W
6. Average Efficiency: 80%
7. Operating Temperature Range: -10 Deg C to +40 Deg C
8. Temperature Rise: 75 Deg C Max at rated load  
50 Deg C Max on enclosure surface

### Mechanical Parameters:

Case Type: Thermoplastic molded enclosure.

Output Cord: 22 AWG, 6 Ft. Long Min.



Agency File:

UL/CUL: File E245587, UL 1310


A. Dimension:

H	W	D
70	50	41

\*Units: In Millimeter

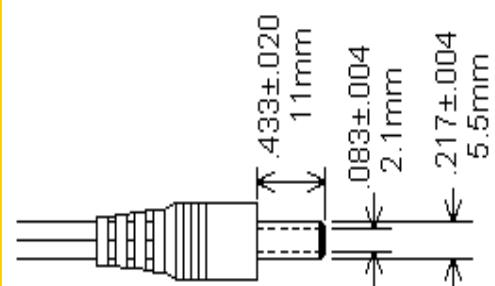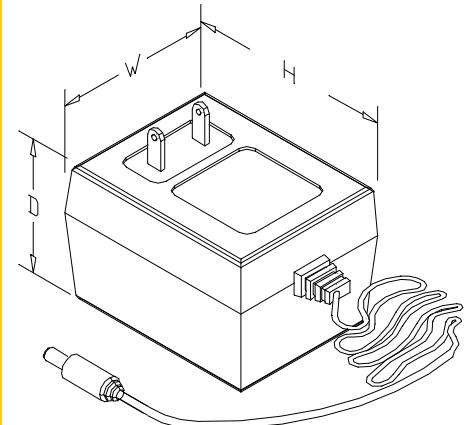

B. Schematic:



**DOE Compliance:** Effective December 30, 2017, the DOE will now not consider an external power supply with specific characteristics to meet the definition of a device that is subject to EPCA regulation, as long as the power supply is not distributed for use with consumer products.

**RoHS Compliance:** As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

**TRIAD**  
CLASS 2 POWER SUPPLY  
MODEL:WAU16-400  
INPUT:120VAC 60Hz,9W  
OUTPUT:16VAC @400mA  
LISTED  
5G66  
E245587 C  
MADE IN CHINA XXXX  
FOR INDUSTRIAL AND COMMERCIAL USE ONLY

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Triad Magnetics:](#)

[WAU16-400](#)