

4


3

2

1

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
DF	X0		A	RELEASED		6-22-05	CT

COMPONENT	MATERIAL	FINISH
HOUSING MOUNTING NUT LOCKWASHER	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER ASTM-A-380
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER ASTM-B-488
O-RING	FLOUROSILICONE PER MIL-R- 25988, CLASS I, TYPE I.	N/A

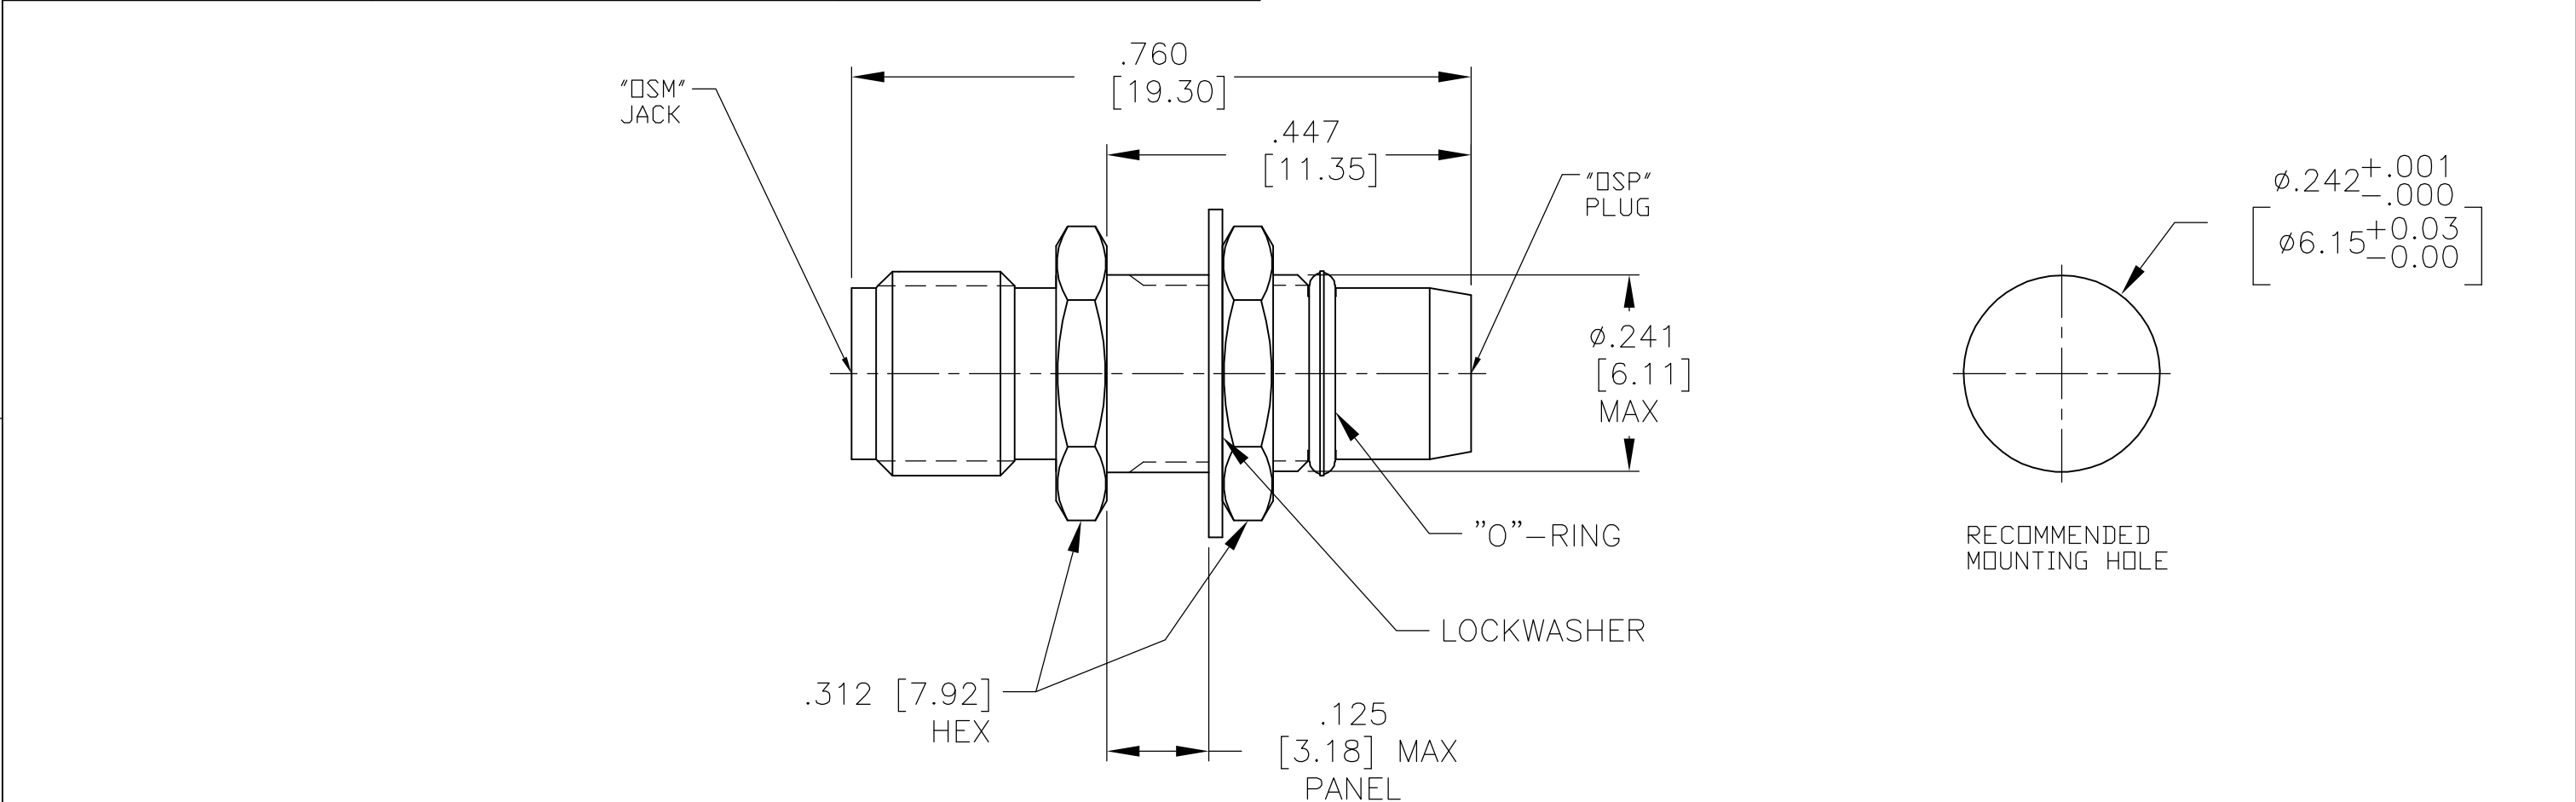

1. CAPTURED CENTER CONTACT
2. FREQUENCY RANGE (GHz): DC TO 18 GHz
3. VSWR: 1.05+, 0.05f(GHz)
4. INSERTION LOSS: (dB MAX): 06 √f(GHz)

1757459-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS	6-22-05	AMP Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
		CHK F.BLASICK	6-22-05				
DIMENSIONS: INCHES [mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.BLASICK	6-22-05	NAME OSM JACK TO OSP BULKHEAD FEED-THRU PLUG ADAPTER	
				PRODUCT SPEC	—		
		0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 [0.13] 4 PLC ± — ANGLES ± —		APPLICATION SPEC	—	SIZE	CAGE CODE
				—	—	A3	00779
MATERIAL SEE TABLE	FINISH SEE TABLE			WEIGHT	—	DRAWING NO	RESTRICTED TO
				CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 1	REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1757459-1](#)