

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0022286362](#)  
**Status:** **Active**  
**Overview:** [KK® Interconnect System - Molex](#)  
**Description:** KK 254 Breakaway Header, Right-Angle, 36 Circuits, 0.38µm (15µ") Gold (Au) Selective Plating, Mating Pin Length 9.17mm (.361")

**Documents:**

[3D Model](#) [Packaging Specification PK-40873-0041-001 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-10-07-001 \(PDF\)](#)

**Agency Certification**

CSA LR19980  
 UL E29179

**Application tooling part link**


Application Tooling Part Link 11-20-1230

**General**

Product Family PCB Headers  
 Series [42376](#)  
 3D Viewer Yes  
 Application Board-to-Board, Signal, Wire-to-Board  
 CURRENT-MAX-NUMERIC 4.0  
 Overview [KK® Interconnect System - Molex](#)  
 PITCH-MATING-NUMERIC 2.54  
 Product Name KK 254  
 UPC 800754239981

**Physical**

Breakaway Yes  
 Circuits (Loaded) 36  
 Circuits (maximum) 36  
 Color - Resin Black  
 Durability (mating cycles max) 25  
 Flammability 94V-0  
 Glow-Wire Capable No  
 Material - Metal Brass  
 Material - Plating Mating Gold  
 Material - Plating Termination Tin  
 Material - Resin High Temperature Thermoplastic  
 Net Weight 2.664/g  
 Number of Rows 1  
 Orientation Right Angle  
 PC Tail Length 3.05mm  
 PCB Locator No  
 PCB Retention None  
 PCB Thickness - Recommended 1.60mm  
 Packaging Type Bag  
 Pitch - Mating Interface 2.54mm  
 Plating min - Mating 0.381µm  
 Plating min - Termination 2.540µm  
 Polarized to Mating Part No  
 Polarized to PCB No  
 Shrouded No  
 Stackable No  
 Surface Mount Compatible (SMC) No

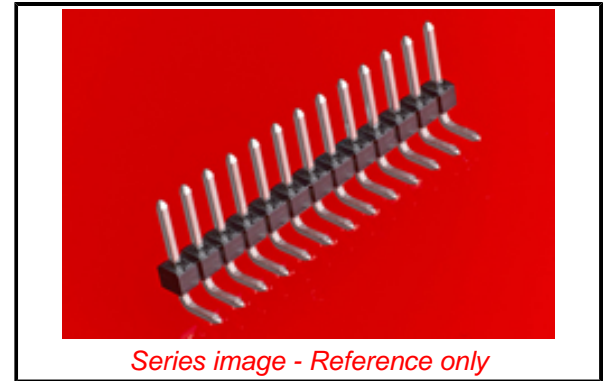

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - ED/71/2019 (16 July 2019)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

**Search Parts in this Series**

[42376](#) Series

**Mates With**

KK Crimp Housing [2695](#) , [6471](#) , [7880](#) , KK PC Board Connector [4455](#)

Temperature Range - Operating  
Termination Interface: Style

See Product Specification  
Through Hole

**Electrical**

Current - Maximum per Contact 4.0A  
Voltage - Maximum 500V

**Solder Process Data**

Duration at Max. Process Temperature (seconds) 005  
Lead-free Process Capability WAVE  
Max. Cycles at Max. Process Temperature 001  
Process Temperature max. C 260

**Material Info**

Engineering Number 42376-0071

**Reference - Drawing Numbers**

Packaging Specification PK-40873-0041-001  
Product Specification PS-10-07-001  
Sales Drawing SD-42376-001-002  
Symbol/Footprint Data SYM-22-28-6363

This document was generated on 10/10/2019

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[22-28-6362](#)