


DATE	REV.	ECN	APP'D BY
9-26-07	C0	8241	TRM
5-30-12	C1	9481	SMN
6-19-12	C2	9515	TRM
2-17-15	C3	10260	ADB

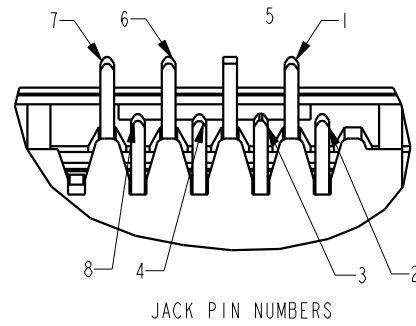



Ø.035 (8)  
[0.89]  
⊕ Ø.006 [0.15]

.080 TYP  
[2.03]

.040 TYP  
[1.02]

SEE DETAIL  
PCB PIN NUMBERS

PCB PIN NUMBERS

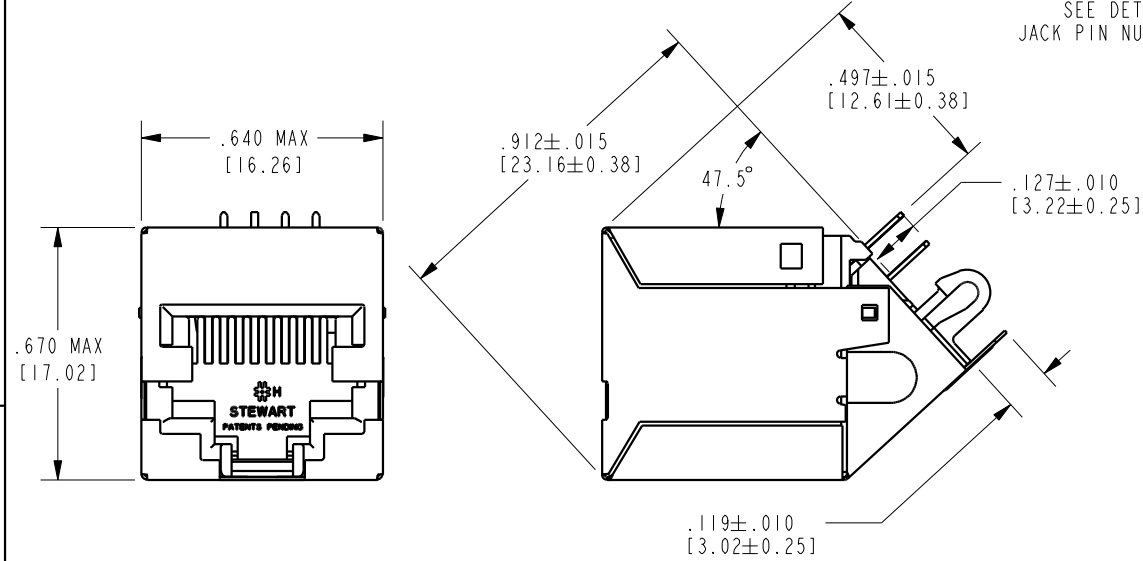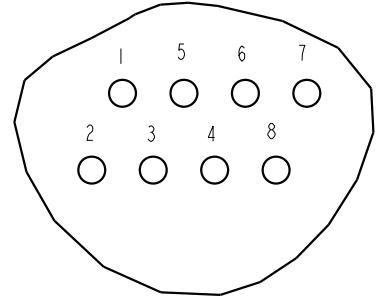

SEE DETAIL  
JACK PIN NUMBERS

.144  
[3.66]

Ø.125-.128 (2)  
[3.18-3.25]  
⊕ Ø.006 [0.15]


Ø.062 (2)  
[1.57]  
⊕ Ø.006 [0.15]

PCB RECOMMENDED HOLE LAYOUT  
SEEN FROM COMPONENT SIDE, .062 [1.57] BOARD THICKNESS

ALL CENTERLINE DIMENSIONS ARE BASIC

- NOTES:
1. CONNECTOR MATERIALS:  
HOUSING: THERMOPLASTIC UL94 V-0  
CONTACTS/SHIELD: COPPER ALLOY  
SHIELD PLATING: NICKEL  
CONTACT PLATING: SELECTIVE PLATING IN CONTACT AREA  
SEE CHART FOR DETAILS.
  2. PRODUCT DESIGNED FOR CATEGORY 6 APPLICATIONS
  3. DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
  4. REFERENCE PRODUCT SPECIFICATION PRO26-01

50 MICRO-INCHES [1.27um] Au OR 5 MICRO-INCHES [0.13um] Au OVER 30 MICRO-INCHES [0.76um] PdNi	SS-60000-011
CONTACT PLATING IN MATING AREA	PART NUMBER

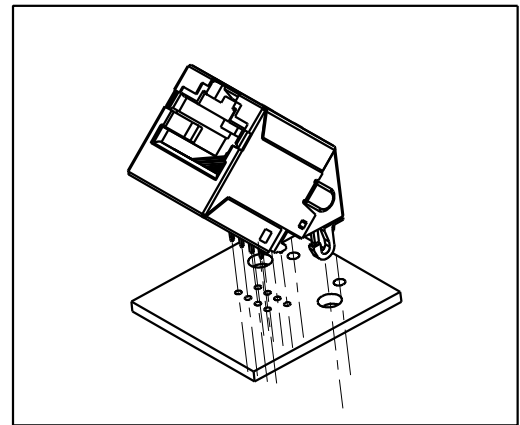

RoHS



THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ±1°

SHEET NO. 1 OF 1

stewartCONNECTORa bel group

11118 Susquehanna Trail South  
Glen Rock, PA 17327-9199  
(717) 235-7512  
<http://www.stewartconnector.com>

TITLE: 47.5° CATEGORY 6 SHIELDED JACK

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF STEWART CONNECTOR. THIS PRODUCT MAY BE PROTECTED BY ONE OR MORE OF THE FOLLOWING US PATENTS: 5791942 6217391 6368159 6419526 6602097 687722 6964587 7048590 7086909 7568950 7686650 OTHER PATENTS MAY BE PENDING.

DRN BY: JRC

DATE: 12-05-02

APPD BY: DHG

DATE: 12-19-02

DWG. NO. CT600014

REV. C3

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel:

[SS-60000-011](#)