



NOTES





1. MATERIAL: WAFER - GLASS FILLED POLYESTER, UL94 V-0, COLOR: NATURAL (WHITE)
PIN - BRASS
2. FINISH: OVERALL REFLOWED MATTE TIN: .000060/0.00152 MIN. OVER .000050/0.00127 MIN. NICKEL
3. PRODUCT SPECIFICATION: PS-10-07
4. BULK PACK PER PK-43009-001
5. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
6. ENGRAVING LOCATION IS DETERMINED BY TOOLING AND WILL BE PRESENT AT EITHER LOCATION SHOWN.

ENG. NO. DESIGNATION:

A-42009- N - **
 CKT. SIZE — VOID PIN DESIGNATION
 A= #1 PIN
 B= #2 PIN
 C= #3 PIN
 ECT.

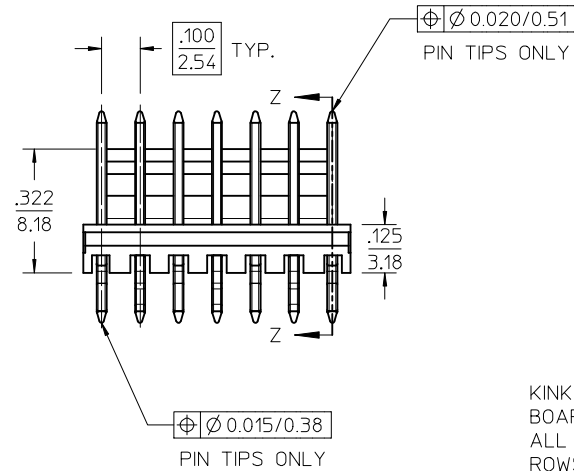

KINKED PINS FOR P.C. BOARD RETENTION-
 ALL PINS KINKED, TWO ROWS OPPOSING EACH OTHER

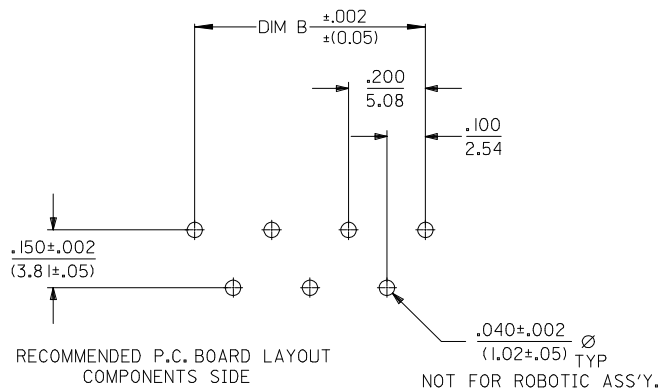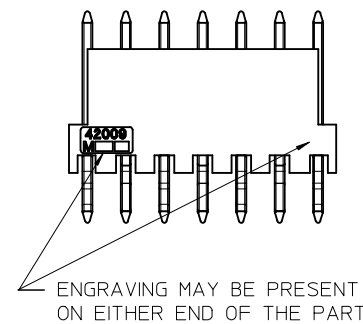

10	.995/(25.27)	.900/(22.86)
9	.895/(22.73)	.800/(20.32)
8	.795/(20.19)	.700/(17.78)
7	.695/(17.65)	.600/(15.24)
6	.595/(15.11)	.500/(12.70)
5	.495/(12.57)	.400/(10.16)
4	.395/(10.03)	.300/(7.62)
3	.295/(7.49)	.200/(5.08)
2	.195/(4.95)	.100/(2.54)
CKT SIZE	DIM A	DIM B

REDRAWN, ENGRAVING EC NO: UCP2013-3460 DRWN:KIPPER 2013/04/11 CHKD:ANDERSON 2013/04/11 APPR:FSMITH 2014/01/13	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION				
				mm	INCH	DRAWN BY	DATE	TITLE WAFER, FRICTION LOCK ASSEMBLY						
			4 PLACES	± ---	± ---	EDGLEY	1986/11/29							
			3 PLACES	± ---	± .010	CHECKED BY	DATE							
			2 PLACES	± 0.25	± .014	EDGLEY	1986/11/29							
			1 PLACE	± 0.36	± ---	APPROVED BY	DATE							
			0 PLACE	± ---	± ---	FSMITH	2014/01/13	molex						
			ANGULAR ±1/2°			MATERIAL NO.					DOCUMENT NO.		SHEET NO.	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART					SDA-42009-*		1 OF 2	
			REV	C	SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

22-46-4042