



Made in the
United States of America




The HGS1M Standard Style Heel Grounder provides a conductive sole under the heel, and a stretch-nylon strap around the back of the shoe. This quality grounder features a durable two-layer sole, lot number and 23-inch multi-strand ribbon. Heel Grounders are designed and manufactured for comfort, durability and cost effectiveness.

Properties	Typical Value	Test Method
Hook and Loop	3/4"	
Elastic Strap	Black	
Sole Interior	Non-marking	
Sole Exterior	<10 ⁵ ohms	
Total Grounder	1.0 x 10 ⁶ ohms	ANSI/ESD S20.20, EIA 625 ESD-SP9.2

Hook and Loop Strap



Listing #90P1

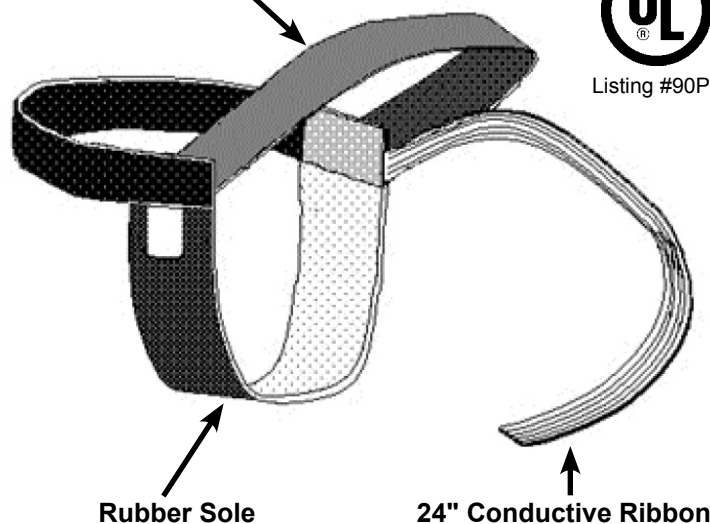

Rubber Sole

24" Conductive Ribbon

Item	Description
HGS1M	Standard Heel Grounder, 1 Megohm Resistor

UL Listed

Note: This product is not recommended for use on equipment with operating voltage exceeding 250 VAC.

CAUTION: The ESD Series is for electrostatic control. It will not reduce or increase your risk of receiving electric shock when using or working on electrical equipment. Follow the same precautions you would use without wrist straps, including:

- Make certain that equipment having a grounding type plug is properly grounded.
- Make certain that you are not in contact with grounded objects other than through the ESD Series.

Unless otherwise noted, tolerance ± 10%

Specifications and procedures subject to change without notice.

HGS1M - HEEL GROUNDER, STANDARD, 1 MEG

926 JR Industrial Drive, Sanford, NC 27332
WEB SITE: StaticControl.com
PHONE (919) 718-0000

**DRAWING
NUMBER**
HGS1M

DATE
August
2015



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[SCS:](#)

[HGS1M](#)