
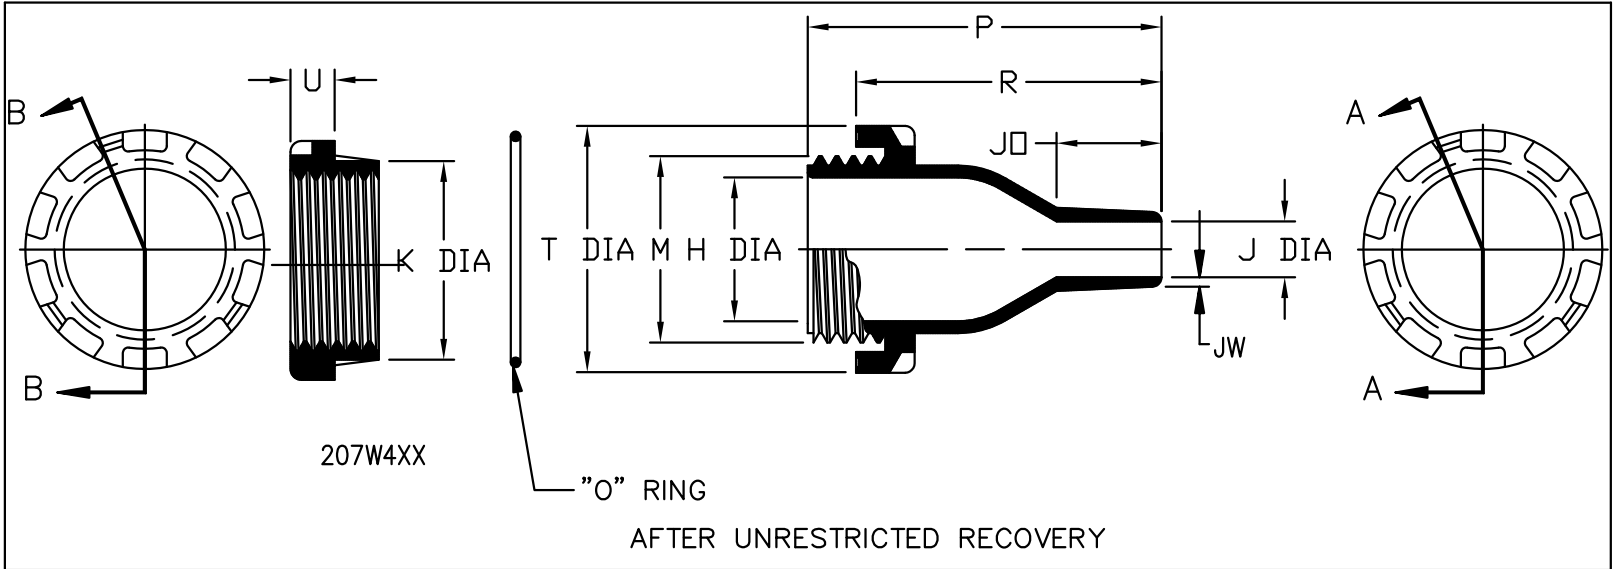


NOTES

1. ALL DIMENSIONS ARE IN  $\frac{\text{INCHES}}{\text{[MILLIMETERS]}}$
2. DIMENSIONS APPEARING IN TABLE ARE AS FOLLOWS:
- a - AS SUPPLIED
  - b - AFTER UNRESTRICTED RECOVERY
3. COATING IS OPTIONAL. AS SUPPLIED DIMENSIONS APPEARING IN TABLE ARE FOR UNCOATED PARTS WHEN COATING IS ADDED, ENTRY DIAMETERS WILL BE REDUCED BY 0.06 MAX.
4. RECOMENDED MAXIMUM PANEL THICKNESS IS 10mm

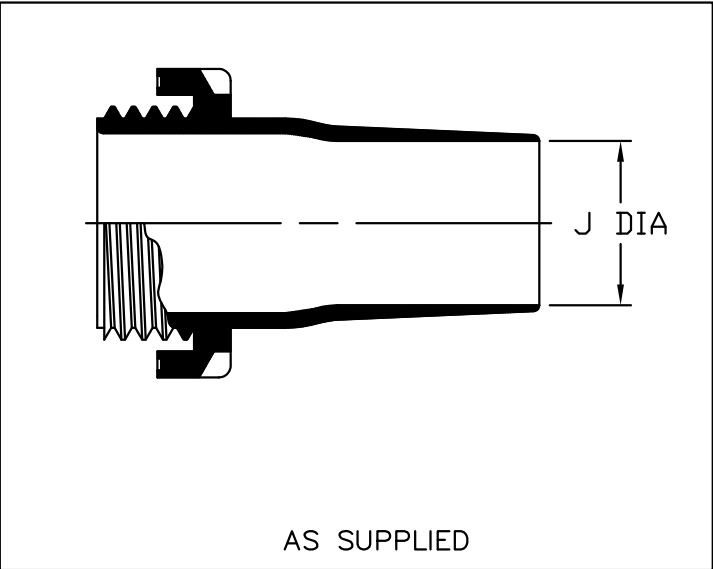

ORDERING INFORMATION

BASE PART NUMBER 207W2XX -X 01 /XX -0

MATERIAL DASH NUMBER

- 3 POLYOLEFIN, SEMI RIGID (RT-301)
- 4 POLYOLEFIN, FLEXIBLE (RT-1304)
- 25 ELASTOMER, FLUID RESISTANT (RT-1325)
- 100 POLYOLEFIN, SEMI FLEXIBLE, ZEROHAL (RT-1323)

MODIFICATION NUMBER

ADHESIVE SLASH NUMBER

SEE COMPATIBILITY CHART BELOW

COLOR DESIGNATOR

TABLE OF DIMENSIONS

| PART NUMBER | H           | J           |             | J0          | K           | M           | P            | R            | U          | T           | JW        | Hole DIA    | Torque Nm |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|--------------|------------|-------------|-----------|-------------|-----------|
|             | Ref b       | Min a       | Max b       | Max b       | Ref b       | THREAD b    | ±10% b       | ±10% b       | ±10% b     | Ref b       | ±20% b    | ±0.02 0.5   |           |
| 207W213-01  | .47 [12,0]  | .39 [10,0]  | .15 [4,0]   | .60 [15,3]  | .90 [23,0]  | .78 [20,0]  | 2.44 [62,0]  | 1.93 [49,0]  | .39 [10,0] | 1.25 [32,0] | .04 [1,0] | .94 [24,0]  | 3         |
| 207W223-01  | .78 [20,0]  | .71 [18,0]  | .27 [7,0]   | .76 [19,5]  | 1.30 [33,0] | 1.18 [30,0] | 2.83 [72,0]  | 2.32 [59,0]  | .39 [10,0] | 1.65 [42,0] | .07 [1,8] | 1.33 [34,0] | 8         |
| 207W234-01  | 1.22 [31,0] | 1.10 [28,0] | .47 [12,0]  | 1.06 [27,0] | 1.81 [46,0] | 1.65 [42,0] | 3.42 [87,0]  | 2.91 [74,0]  | .39 [10,0] | 2.28 [58,0] | .10 [2,5] | 1.85 [47,0] | 11        |
| 207W245-01  | 1.77 [45,0] | 1.65 [42,0] | .71 [18,0]  | 1.26 [32,2] | 2.34 [59,5] | 2.20 [56,0] | 4.01 [102,0] | 3.50 [89,0]  | .39 [10,0] | 2.79 [71,0] | .12 [3,0] | 2.38 [60,5] | 14        |
| 207W258-01  | 2.67 [68,0] | 2.52 [64,0] | 1.18 [30,0] | 1.53 [39,0] | 3.30 [84,0] | 3.15 [80,0] | 4.80 [122,0] | 4.29 [109,0] | .39 [10,0] | 3.82 [97,0] | .12 [3,0] | 3.34 [85,0] | 16        |
| 207W264-01  | 1.57 [40,0] | 1.49 [38,0] | .59 [15,0]  | 1.11 [28,3] | 2.12 [54,0] | 1.97 [50,0] | 3.74 [95,0]  | 3.22 [82,0]  | .39 [10,0] | 2.62 [66,5] | .10 [2,5] | 2.16 [55,0] | 11        |

If this document is printed it becomes uncontrolled. Check for the latest revision

COMPATIBILITY CHART

| MATERIAL DASH NO. | ADHESIVE (COATING) SLASH NUMBER | ADHESIVE (COATING) S NUMBER |
|-------------------|---------------------------------|-----------------------------|
| -3                | /42; /86;                       | S-1017 / S-1048             |
| -4                | /42; /86;                       | S-1017 / S-1048             |
| -25               | /86; /225                       | S-1048 / S-1206             |
| -100              | /86; /180                       | S-1048 / S-1030             |
|                   |                                 |                             |
|                   |                                 |                             |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC AND INCHES ARE IN BRACKETS. DECIMAL TOLERANCES  
XXX ± 0,13 (.005)  
XX ± 0,25 (.01)  
X ± 0,50 (.10)  
ANGLE TOLERANCE  
.X ± 1 DEG.

TYCO ELECTRONICS RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANY TIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.

© 2014 Tyco Electronics Corporation. All rights reserved.

DRAWN MMAZARIEGOS DATE 5/28/12  
APPROVED D. HURRELL DATE 5/30/12  
RPN  
SEE TABLE  
CAD FILE: 207W213THRU264-01

THIRD ANGLE PROJECTION

TITLE

TE

TE Connectivity

FEEDTHROUGH SEAL

SIZE B CODE IDENT. NO. 06090 DWG. NO. 207W213THRU264-01

SCALE:NTS DO NOT SCALE THIS DRAWING SHEET 1 OF 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207W234-25-01/225-0](#)