

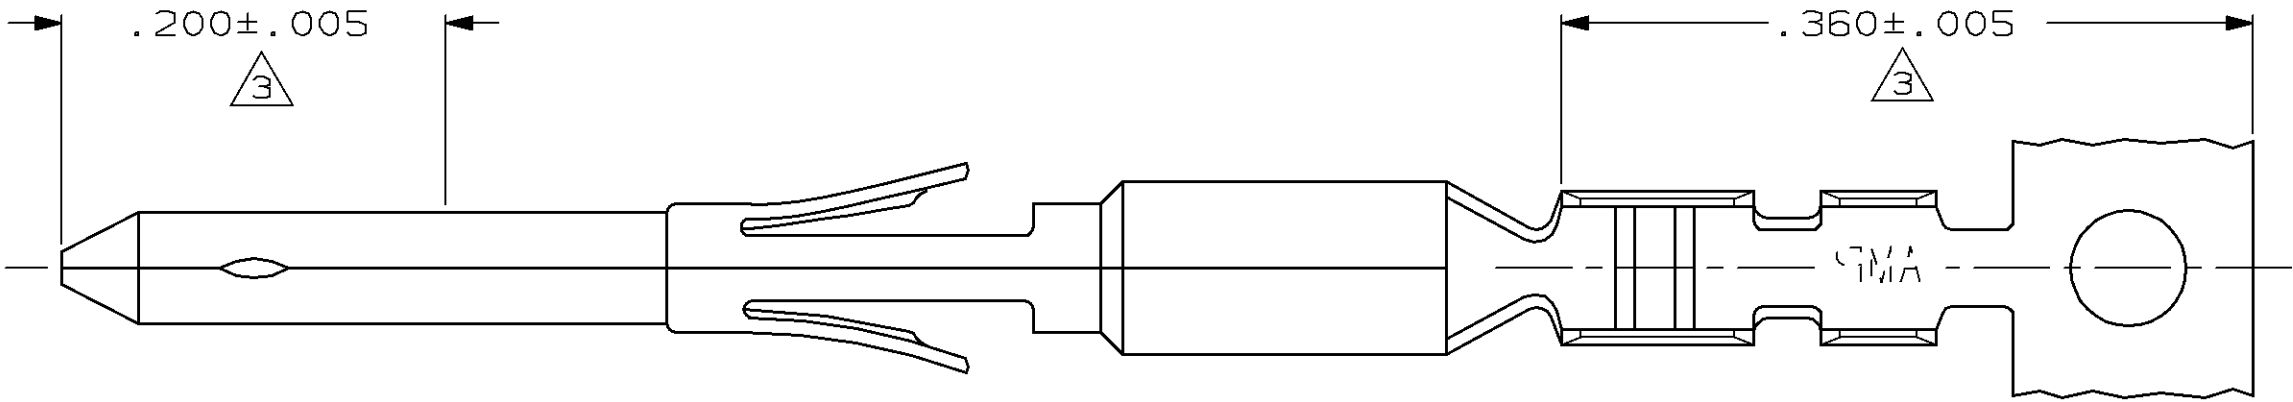



MOD	LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
1	BD	20				E	REVISED & REDRAWN PER SP-46	8-27-87	-
						F	REVISED ECN-SP-85	2-11-88	-
						G	REVISED ECN BD2801	2-16-89	RW
						H	OBSOLETE -6 PER EC 0020-894-94	08/17/94	AT
						J	OBS -4 PER EC 0020-1416-94	11/25/94	AT

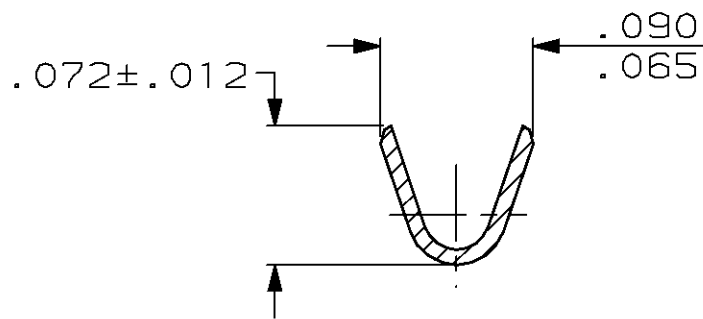

1. WIRE RANGE: #24 - #20 AWG.
2. INSULATION RANGE: .054 - .036 DIA.
3. DUPLEX PLATED .000150 MIN. TIN/LEAD ON WIRE BARREL END FOR LENGTH OF .360, .0000150 MIN. THK. GOLD ON MATING END FOR A LENGTH OF .200 WITH ENTIRE CONTACT UNDERPLATED .000100 MAX. THK. NICKEL.
4. TIN PLATE .000050 MIN. THK OVER NICKEL.
5. SILVER PLATE .000100 MIN. THK. OVER COPPER.
6. OBSOLETE PART NUMBER.

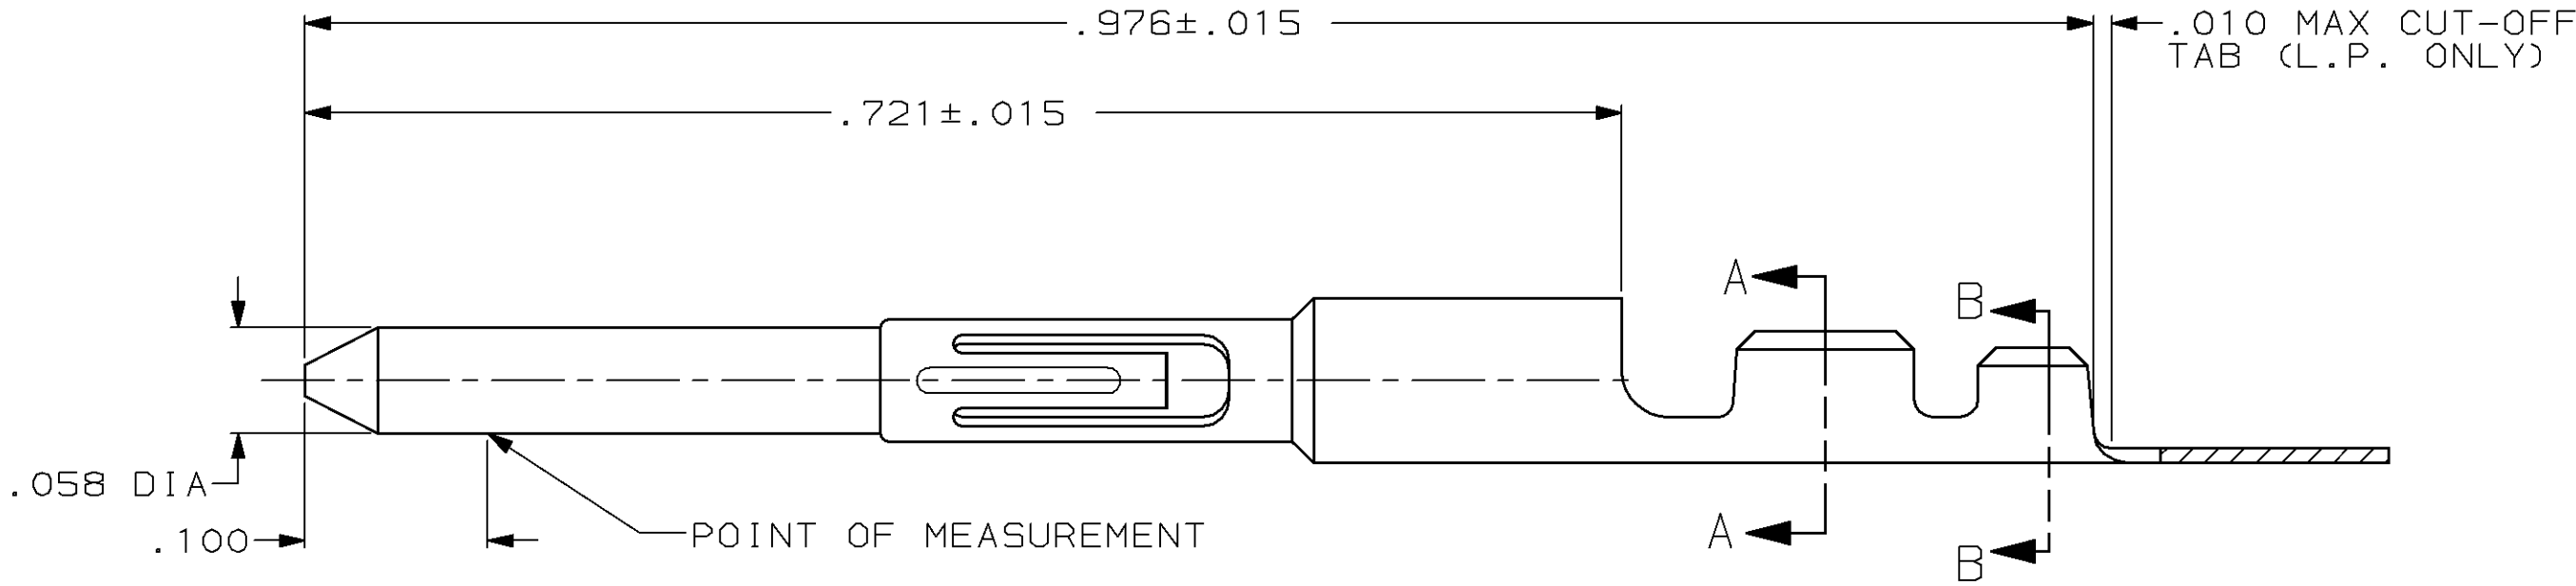

SECTION A-A

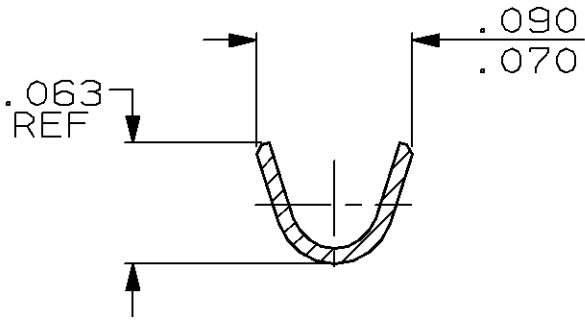

SECTION B-B

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

		LOOSE PIECE P/N		FINISH		PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -		DR 10-6-87 L.SIPE		AMP AMP Incorporated Harrisburg, PA 17105-3608 CIRCULAR DIN, PIN CONTACT			
		CHK 10-13-87 S.WELDON					
		APPD 10-13-87 D.NEIDIG					
MATERIAL BRASS PER MIL-C-50		APPD 10-13-87 V.KUMAR					
		PRODUCT SPEC -					
FINISH SEE TABLE		APPLICATION SPEC -		SIZE C	CAGE CODE 00779	DRAWING NO C-66735	
		WEIGHT -		SCALE 10:1			SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[66735-2](#)