


D


C

B

A

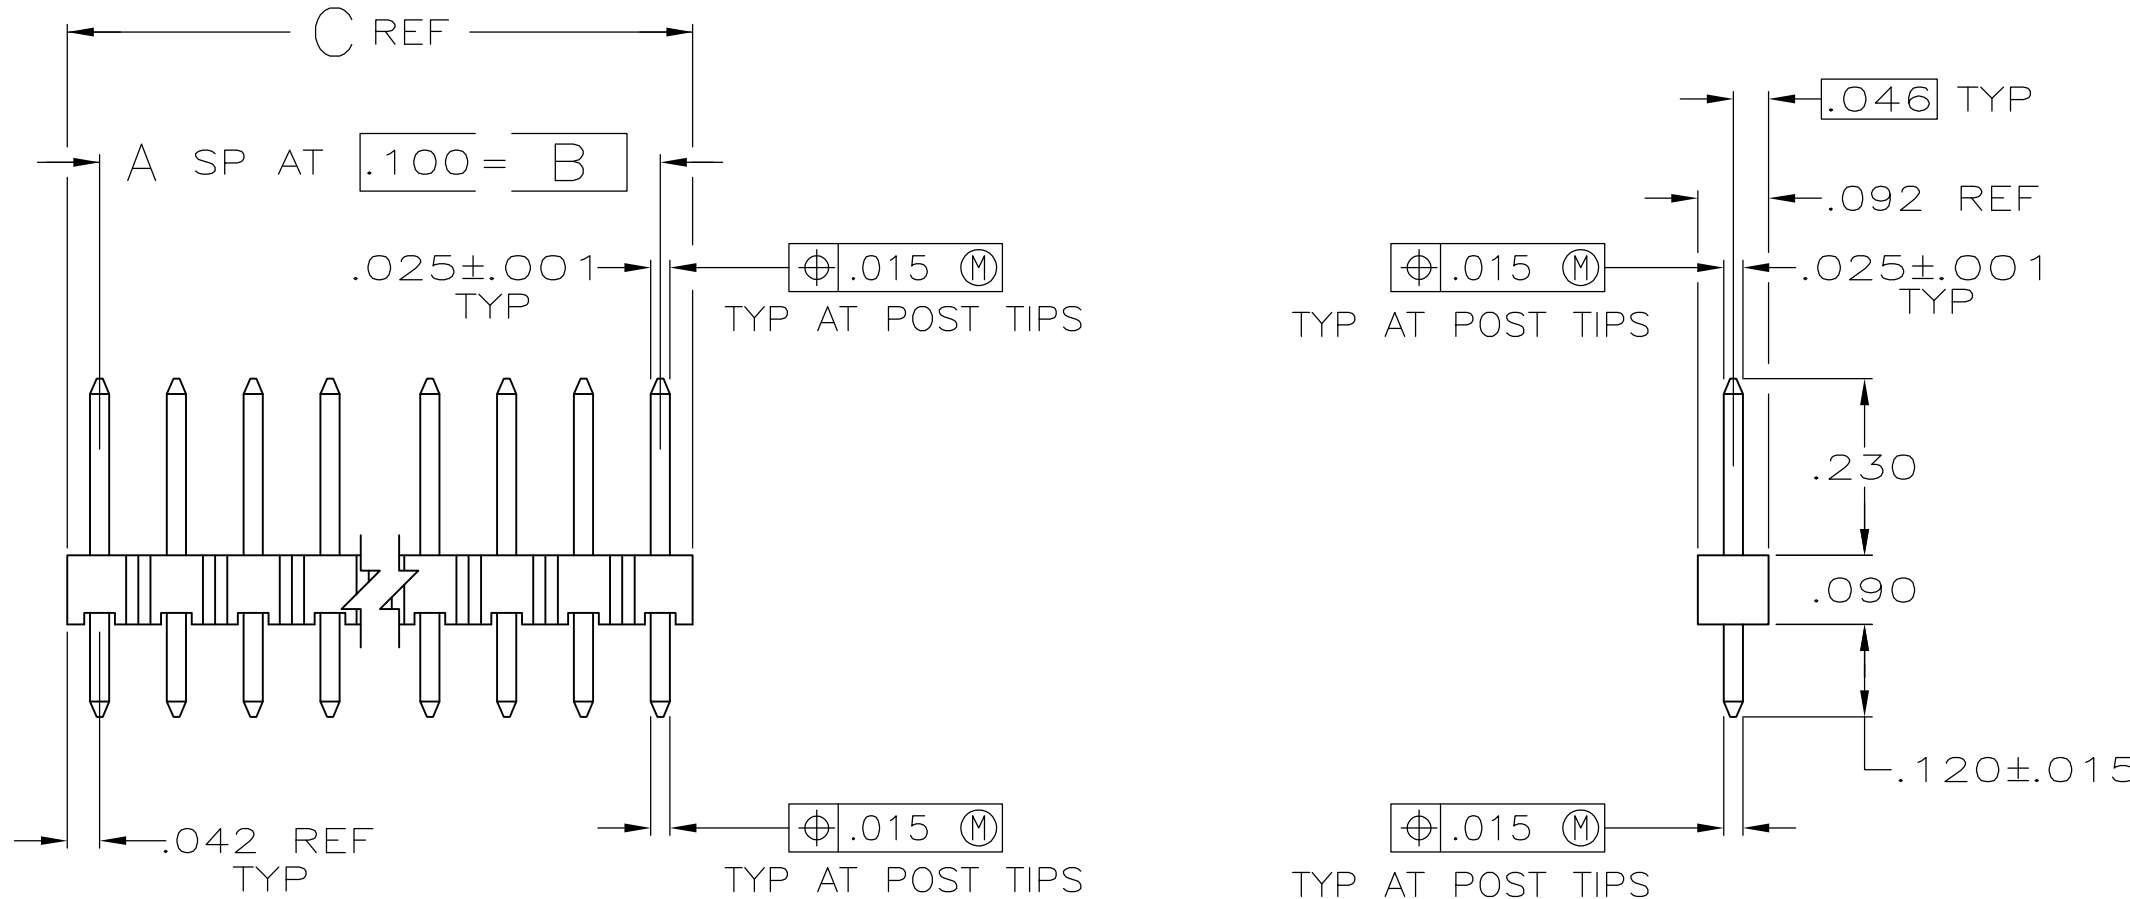

- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 2 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 3 PARTS PACKAGED IN TUBES.
- 4 .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
- 5 .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 6 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 7 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

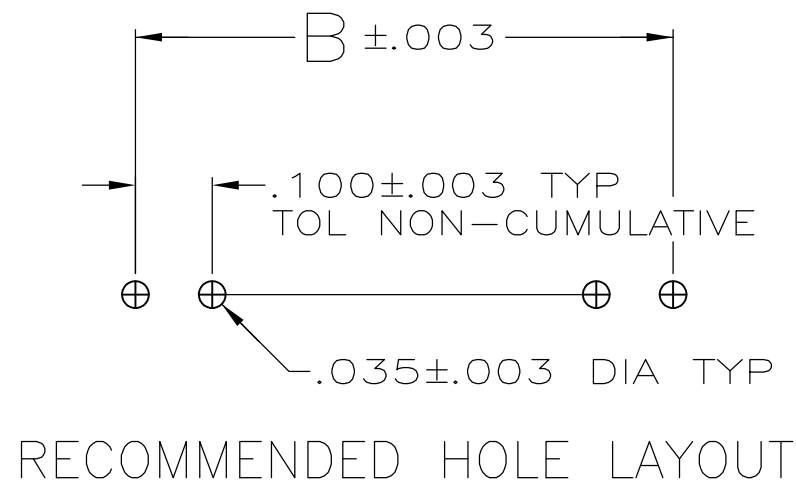

LOC
AD

DIST
39

REVISONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
T		REVISED PER ECO-14-000068	26APR2014	NK	MM

△	△	.484	.400	4	5	5-103327-4
△	△	3.584	3.500	35	36	5-103327-3
△	△	1.584	1.500	15	16	5-103327-2
	△	.384	.300	3	4	5-103327-1
OBSOLETE	△	1.384	1.300	13	14	5-103327-0
	△	3.984	3.900	39	40	4-103327-9
	△	.984	.900	9	10	4-103327-8
OBSOLETE	△	.784	.700	7	8	4-103327-7
	△	.584	.500	5	6	4-103327-6
	△	.284	.200	2	3	4-103327-5
	△	.184	.100	1	2	4-103327-4
	△	.084	—	—	1	4-103327-3
△	△	1.184	1.100	11	12	4-103327-2
△	△	1.084	1.000	10	11	4-103327-1
	△	3.984	3.900	39	40	4-103327-0
△	OBSOLETE	3.884	3.800	38	39	3-103327-9
△	OBSOLETE	3.784	3.700	37	38	3-103327-8
△	OBSOLETE	3.684	3.600	36	37	3-103327-7
	△	3.584	3.500	35	36	3-103327-6
△	OBSOLETE	3.484	3.400	34	35	3-103327-5
△	OBSOLETE	3.384	3.300	33	34	3-103327-4
△	OBSOLETE	3.284	3.200	32	33	3-103327-3
△	OBSOLETE	3.184	3.100	31	32	3-103327-2
△	OBSOLETE	3.084	3.000	30	31	3-103327-1
△	OBSOLETE	2.984	2.900	29	30	3-103327-0
△	OBSOLETE	2.884	2.800	28	29	2-103327-9
△	OBSOLETE	2.784	2.700	27	28	2-103327-8
△	OBSOLETE	2.684	2.600	26	27	2-103327-7
△	OBSOLETE	2.584	2.500	25	26	2-103327-6
△	OBSOLETE	2.484	2.400	24	25	2-103327-5
△	OBSOLETE	2.384	2.300	23	24	2-103327-4
△	OBSOLETE	2.284	2.200	22	23	2-103327-3
△	OBSOLETE	2.184	2.100	21	22	2-103327-2
△	OBSOLETE	2.084	2.000	20	21	2-103327-1
△	OBSOLETE	1.984	1.900	19	20	2-103327-0
△	OBSOLETE	1.884	1.800	18	19	1-103327-9
	△	1.784	1.700	17	18	1-103327-8
△	OBSOLETE	1.684	1.600	16	17	1-103327-7
	△	1.584	1.500	15	16	1-103327-6
△	OBSOLETE	1.484	1.400	14	15	1-103327-5
	△	1.384	1.300	13	14	1-103327-4
△	OBSOLETE	1.284	1.200	12	13	1-103327-3
△	SUPERSEDED BY 6-146278-2	1.184	1.100	11	12	1-103327-2
	△	1.084	1.000	10	11	1-103327-1
	△	.984	.900	9	10	1-103327-0
△	SUPERSEDED BY 5-146278-9	.884	.800	8	9	103327-9
	△	.784	.700	7	8	103327-8
	△	.684	.600	6	7	103327-7
	△	.584	.500	5	6	103327-6
	△	.484	.400	4	5	103327-5
	△	.384	.300	3	4	103327-4
	△	.284	.200	2	3	103327-3
	△	.184	.100	1	2	103327-2
	△	.084	—	—	1	103327-1
PLATING	C	B	A	NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
POST: COPPER ALLOY

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± - ± -
ANGLES ± - ± -
FINISH SEE TABLE

DWN
J. MARTINELLI
CHK
JOHN KNITTLE
APVD
B. FLINCHBAUGH

10/15/92
23NOV92
23NOV92

NAME

ASSEMBLY, HEADER, BREAKAWAY, MOD II,
SINGLE ROW, .100 C/L, VERTICAL,
WITH .025 SQUARE POSTS

SIZE
A1

CAGE CODE
00779

DRAWING NO
103327

RESTRICTED TO

CUSTOMER DRAWING

SCALE
4:1

SHEET
1

OF
1

REV
T

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103327-7](#)