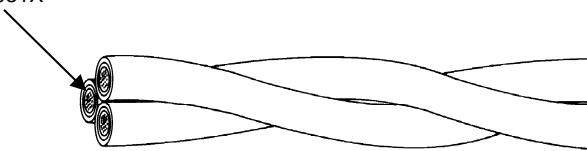



SPECIFICATION CONTROL DRAWING				SCD		44A033X						
Title		THREE CONDUCTOR CABLE, UNSHIELDED, UNJACKETED, GENERAL PURPOSE, 2500 VOLT			Date		11-3-15		Revision		B	
This specification sheet forms a part of the latest issue of Raychem Specification 44.												
<div>COMPONENT WIRES - 44A031X</div> 												
CABLE CONSTRUCTION DETAILS												
PART NUMBER 1/	CONDUCTOR SIZE (AWG)	OUTSIDE DIAMETER (inch)		MAXIMUM WEIGHT (lbs/1000 ft.)								
		NOMINAL	MAXIMUM									
44A033X-24-*	24	.123	.129	9.7								
44A033X-22-*	22	.149	.156	13.9								
44A033X-20-*	20	.168	.175	19.6								
44A033X-18-*	18	.190	.197	27.9								
44A033X-16-*	16	.210	.218	35.1								
44A033X-14-*	14	.248	.257	52.1								
44A033X-12-*	12	.283	.293	77.8								
44A033X-10-*	10	.348	.365	118.								
CABLE RATINGS AND ADDITIONAL REQUIREMENTS												
<p>TEMPERATURE RATING: 150°C Maximum continuous conductor temperature</p> <p>VOLTAGE RATING: 2500 volts (rms) at sea level</p> <p>DIELECTRIC WITHSTAND: 5000 volts (rms), 60 Hz, 1 minute</p> <p>INSULATION FLAWS: Spark Test, 8.0 kV (rms) at 3 kHz Impulse Dielectric Test, 13.0 kV (peak)</p>						<p>1/ PART NUMBER: The "X" in the part numbers above shall be replaced with a conductor material designator as follows:</p> <ul style="list-style-type: none">1 tin-coated copper2 silver-coated copper3 nickel-coated copper4 silver-coated high-strength copper alloy (AWG 24-18 only) <p>The "*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors. Colors shown do not necessarily reflect the sequence of manufacturing.</p> <p>Example: AWG 20, tin-coated copper conductors; black, brown, and red component wires: 44A0331-20-0/1/2</p>						
<p>NOTE: Nominal values are for information only. Nominal values are not requirements.</p>												
<p>Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.</p> <p>Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.</p>												
<p>1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.</p>												
Page 1 of 1	Raychem, TE Connectivity, TE connectivity (logo), and TE (logo) are trademarks.					 <div>Raychem Wire & Cable 501 Oakside Avenue Redwood City, CA 94063-3800 Phone: 1-800-227-8816 Fax: 1-650-361-6297</div>						
	DIMENSIONS ARE IN INCHES AND, UNLESS OTHERWISE DESIGNATED, ARE NOMINAL											
	THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.											

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[44A0331-20-0/2/9-US](#)