
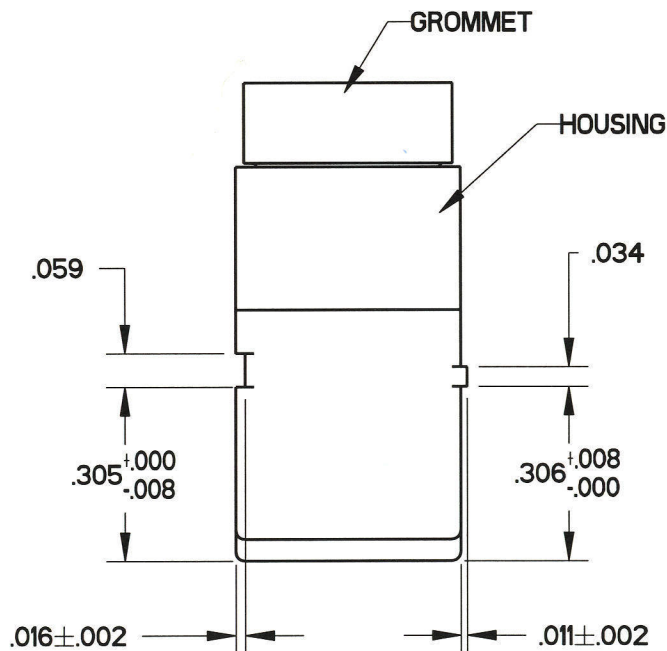
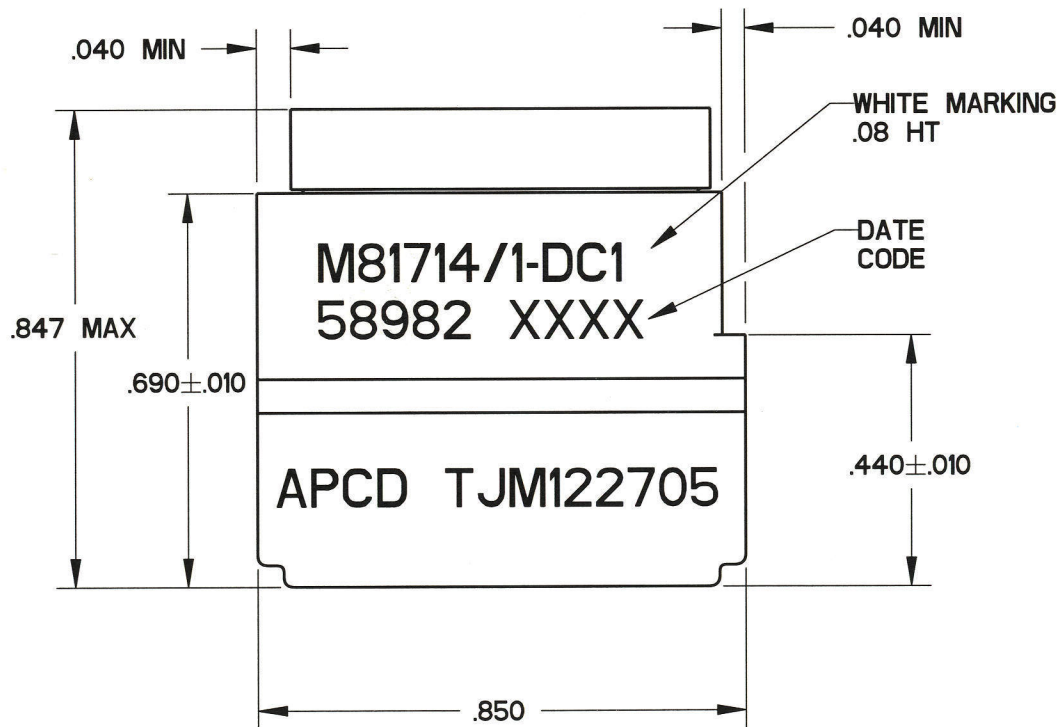
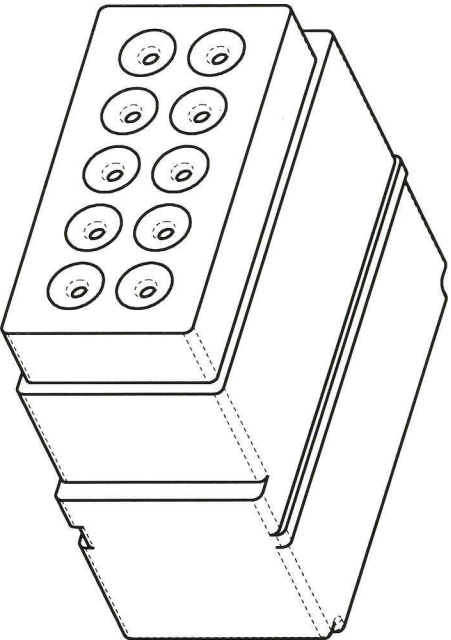


REV	ECN	APP'D
-	5814	JT 4-13-06

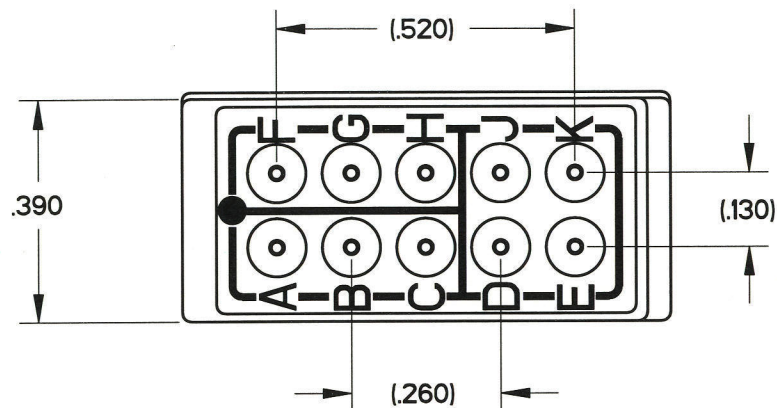

- NOTES:
- PERFORMANCE:
 - MEETS PERFORMANCE AND ENVIRONMENTAL REQUIREMENTS OF MIL-T-81714/1
 - MODULES ARE TO BE MOUNTED INTO RACK ASSEMBLY M81714/5 OR/16 OR COMMERCIAL EQUIVALENT.
 - DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS AT SEA LEVEL, 200 VRMS AT 100,000 FEET.
 - OPERATING TEMPERATURE: -65 C TO 200 C.
 - CURRENT RATING: 5 AMPS
 - VIBRATION AND SHOCK: MIL-T-81714 PARAGRAPH 3.5.5 AND 3.5.8
 - MATERIALS:
 - HOUSING - POLYETHERIMIDE, COLOR: BLACK.
 - GROMMET - SILICONE ELASTOMER, COLOR: BLUE
 - INTERNAL CONTACTS - COPPER ALLOY, GOLD PLATED
 - CONTACT RETAINERS - STAINLESS STEEL.

APCD P/N	SUPPLIED				MARKING		CLASS
	QTY.	MIL. P/N	APCD P/N	QTY.	APCD P/N	APCD QPL NO.	
TJM122605	--	--	--	--	--	TJM122705	M81714/I-DC1
TJM122705	11	M39029/I-100	CNP068000	2	CNA032401		D

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±2.0°	PROJECTION 	Amphenol Pcd SPECIFICATION DRAWING DRWN A. SWEEZEY 03/09/06		TITLE TERMINAL JUNCTION MODULE SZ 22 FEEDBACK, DC1			
ORIGINAL 	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA		ENGR R. SWAINE 03/01/06		SIZE B	DWG NO. TJM122605		REV -
			APPD <i>Paul TR 4-13-06</i>		CODE: 58982		SCALE: 3:1	SHEET 1 OF 1

Amphenol Pcd

SPECIFICATION DRAWING

DRWN

A. SWEEZEY 03/09/06

ENGR

R. SWAINE 03/01/06

APPD

Jane R 4-13-06

TITLE

TERMINAL JUNCTION
MODULE
SZ 22 FEEDBACK, DC1

SIZE B

DWG NO. TJM122605

REV -

CODE: 58982

SCALE: 3:1

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[TJM122705](#)