
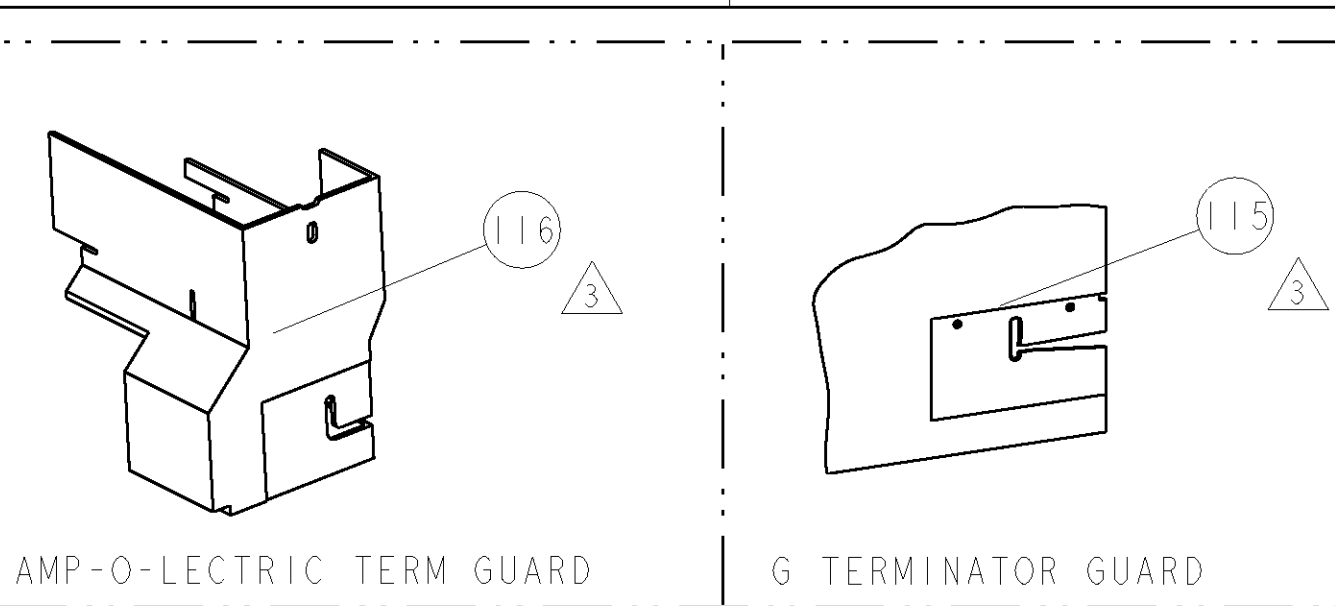
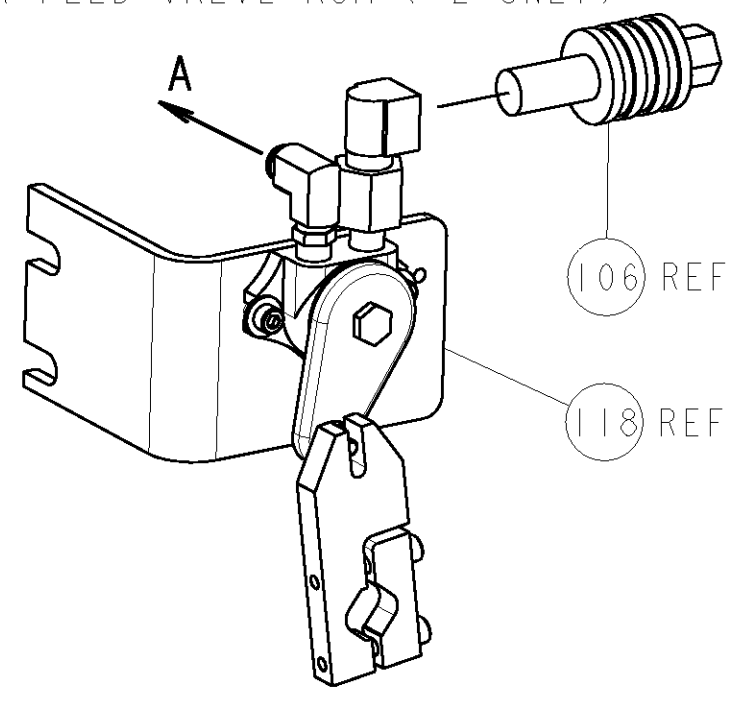
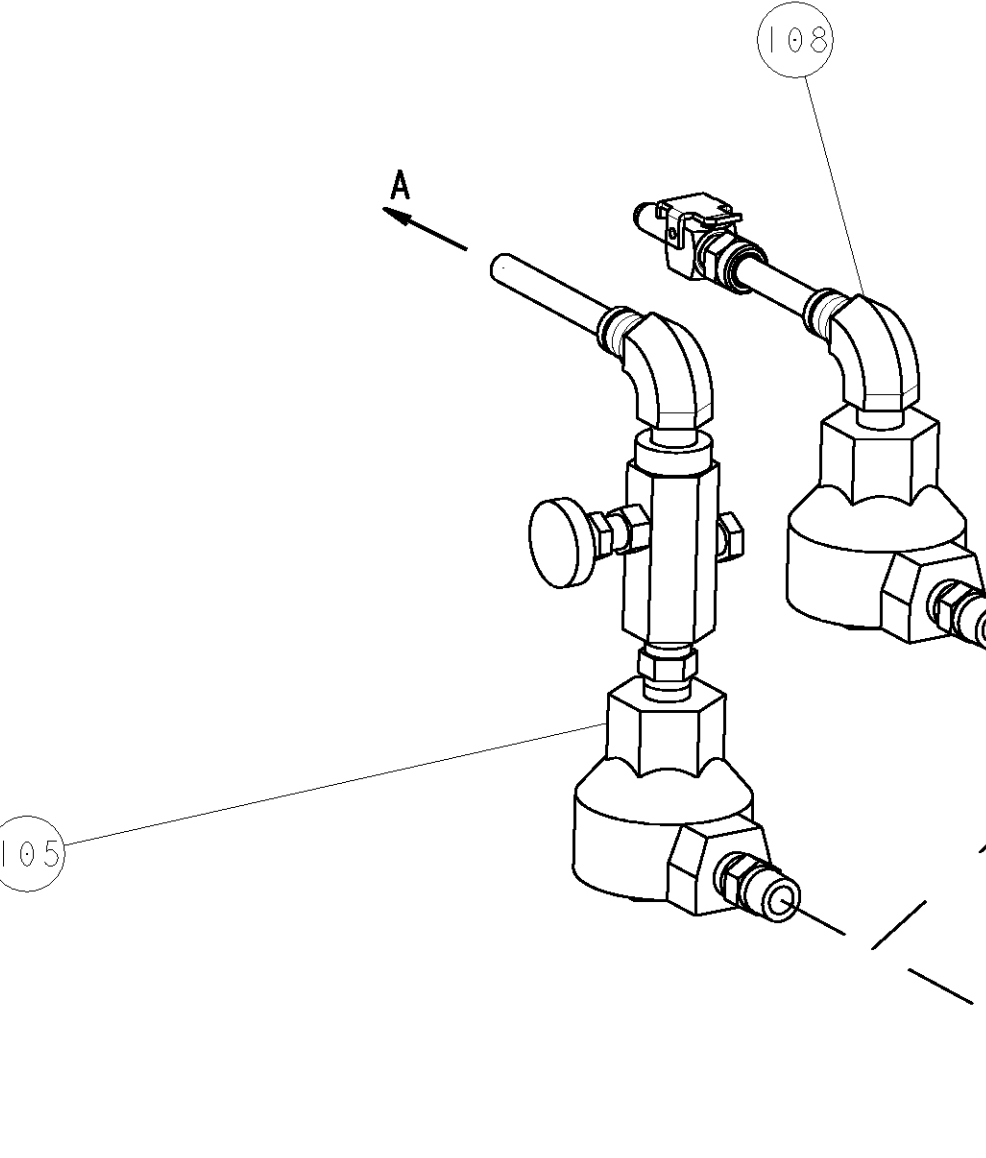


8			7					
THIS DRAWING IS UNPUBLISHED.			RELEASED FOR PUBLICATION			20		
(C) COPYRIGHT 20			BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.					
PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION		
1852631-1		A	122500-1	LEADMAKER	AIR FEED	CUTS CARRIER		
1852631-2		A	565435-5	BENCH MODEL K	AIR FEED	CUTS CARRIER		
1852631-3		A	354500-1	BENCH MODEL G	AIR FEED	CUTS CARRIER		
1852631-6		A	122500-1	LEADMAKER	AIR FEED	CONTINUOUS CARRIER		
7-1852631-7		A	-	-	-	SPARE PARTS		


△ RECOMMENDED SPARE PARTS

△ GREASE LIGHTLY

△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

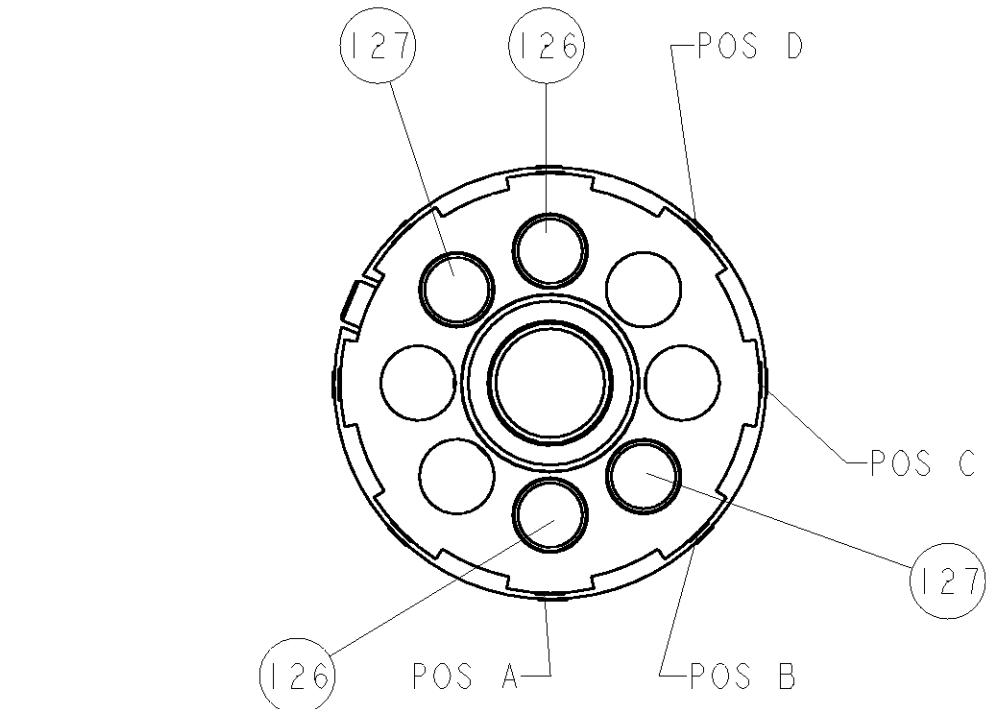

TERMINAL NAME: DIA. 4mm SOCKET CONTACT					
TE PN	-	TE TERMINAL - TE CRIMP SPECS			
1703420-2	-				
-	-	PAD LTR	CRIMP HEIGHT	WIRE SIZE	
-	-	A	2.30mm+ .05/- .05 [.091+ .002/- .002]	4mm2	
-	-	B	2.05mm+ .05/- .05 [.081+ .002/- .002]	3mm2	
-	-	C	-	-	
-	-	D	-	-	
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	3.05mm [.120]	F	3.0-4.0mm
-	-	INSUL	3.94mm [.155]	O	Ø2.692 - 3.708
WIRE STRIP LENGTH	3.810-5.999	TERM APPL SPEC	114-18022	FEED	19.812
		APPLICATOR INSTRUCTIONS		SET UP GAGE	
		408-8040		458637-1	

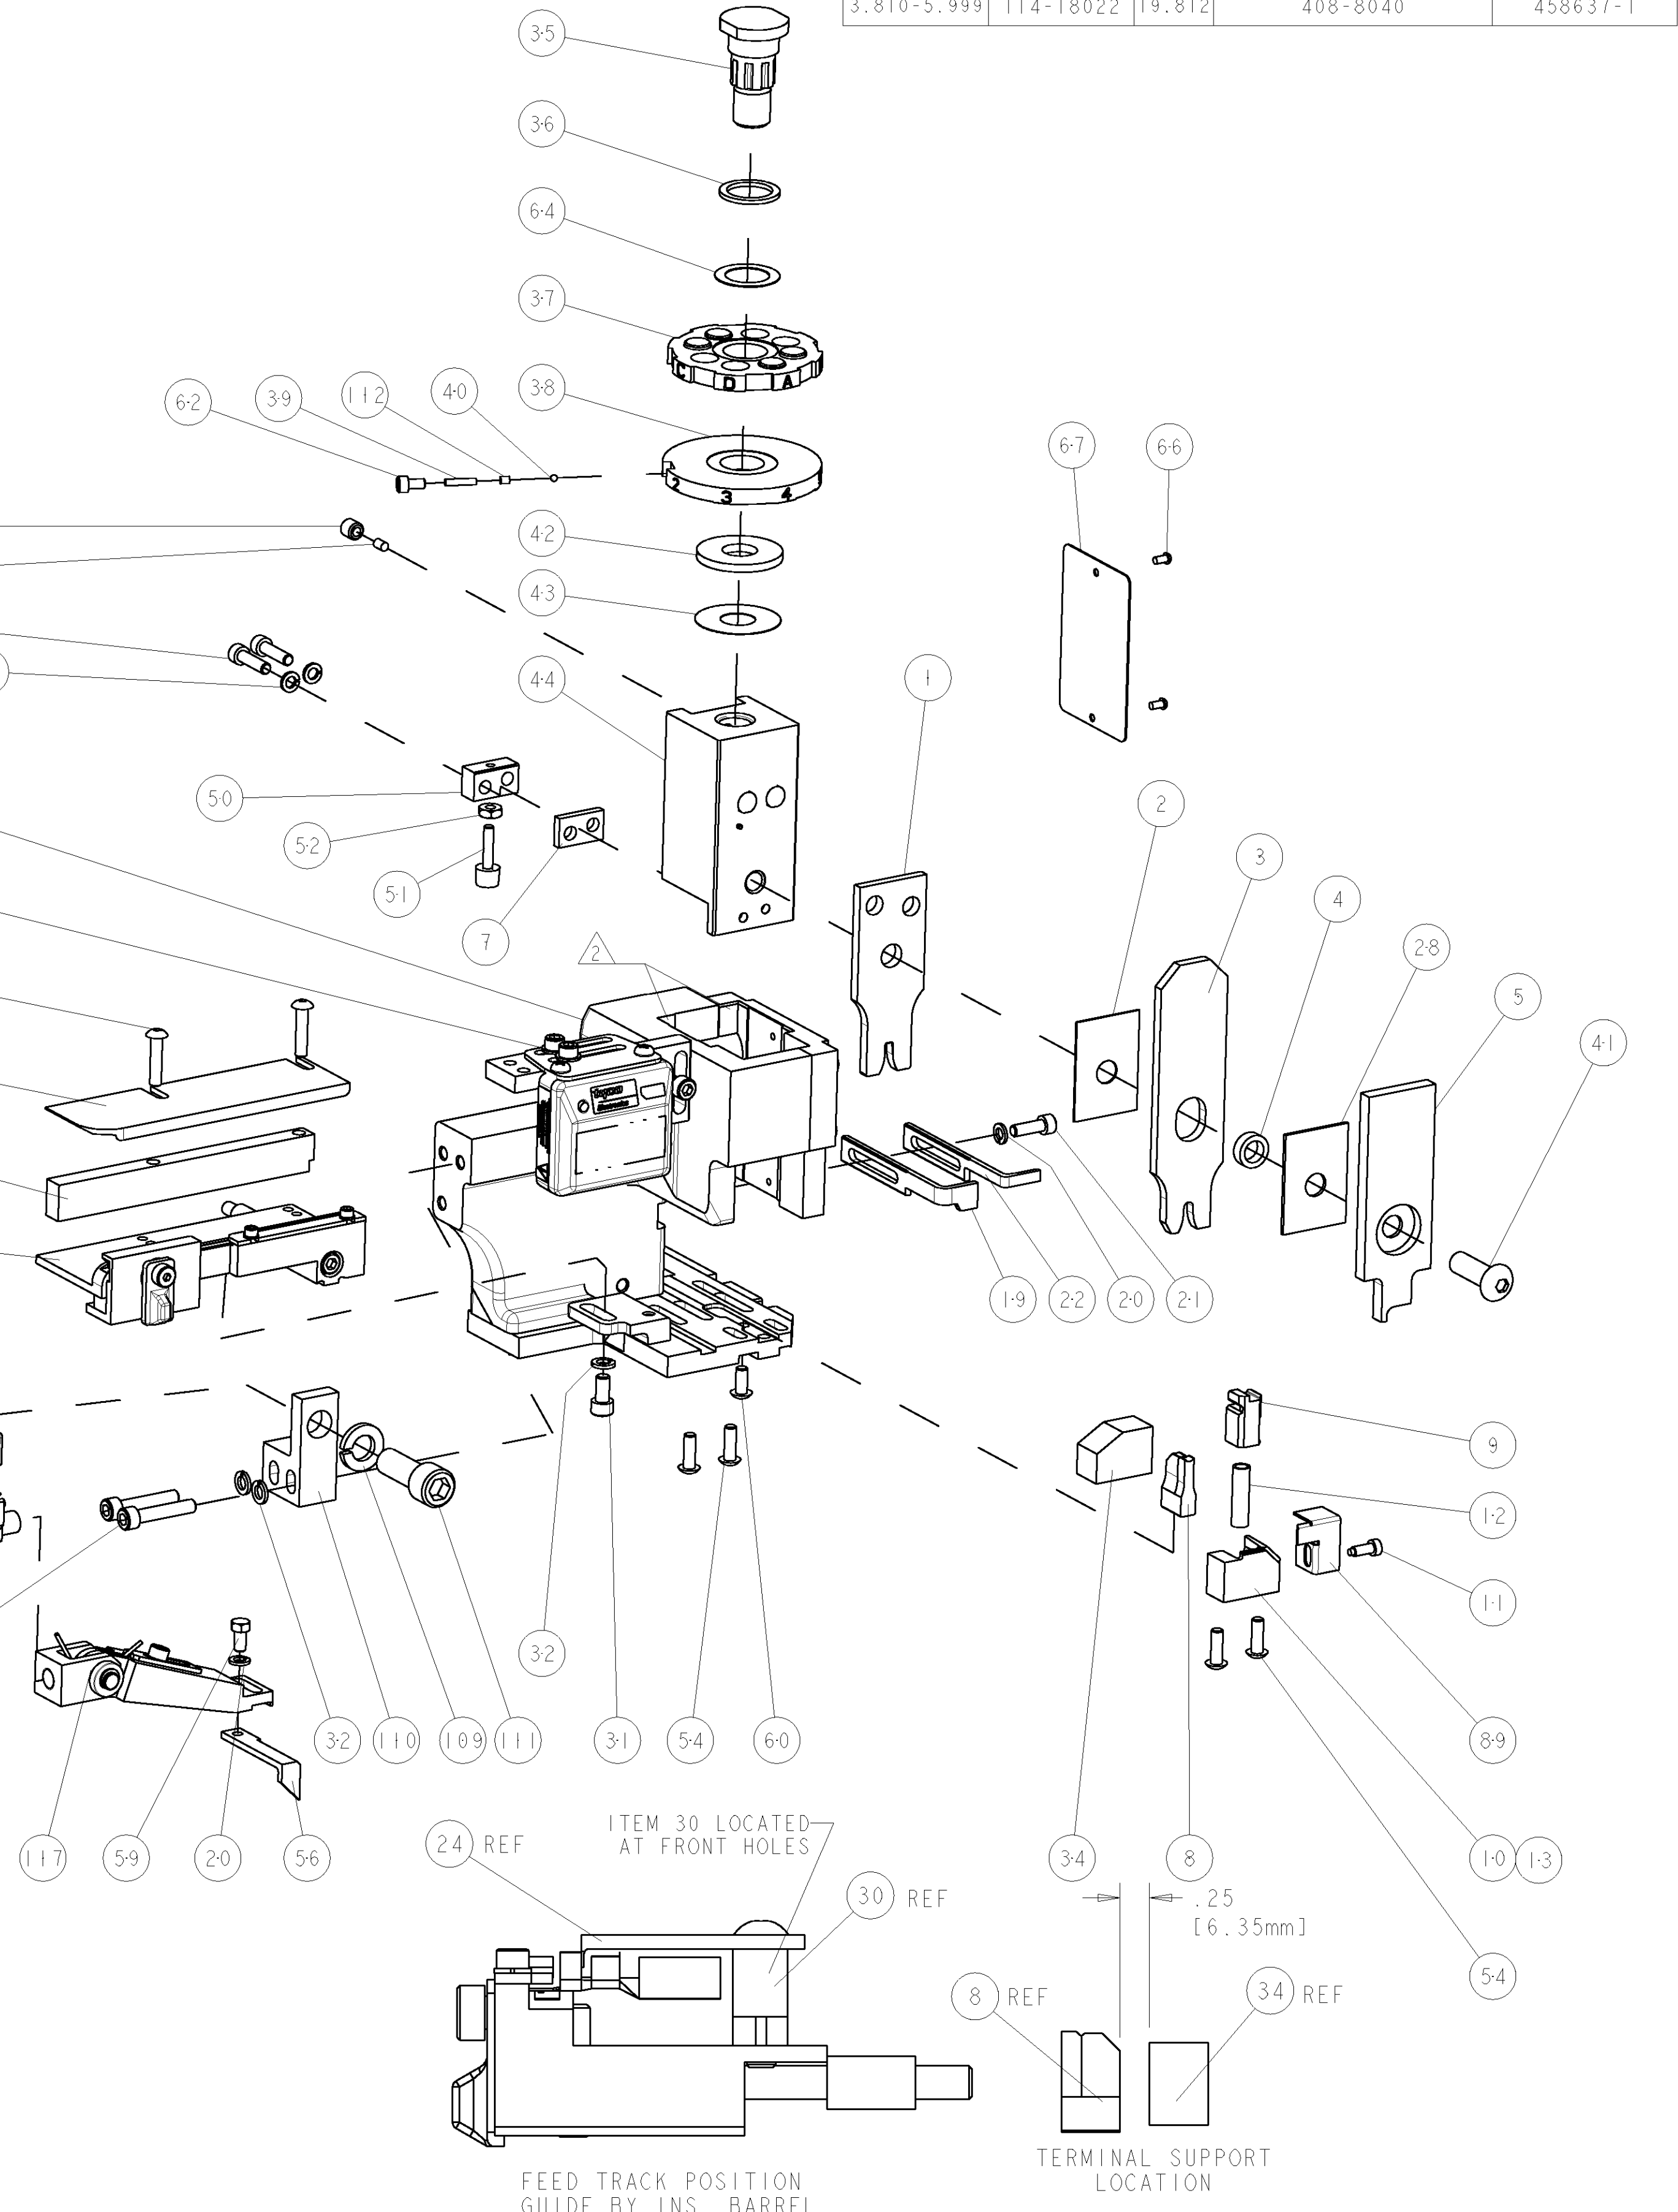

										LOC		DIST		REVISONS															
										A		66		P		LTR		DESCRIPTION						DATE		DWN		APVD	
														A		RELEASED						27FEB2008		BH		BH			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852631-1](#)