

# Features

## Unregulated Converters

- Fully RoHS 6/6 Conform
- Full Power at 100°C Ambient Temperature
- 1kVDC and 3kVDC Isolation Options
- /H Version Certified for Medical Applications
- UL/EN/CSA Certified, CB Report
- Suitable for Fully Automated Assembly (including Vapor Phase Soldering)
- Optional Continuous Short Circuit Protection
- Efficiency to 85%
- Built-In EN55022 Class A Filter

### Description

The R2S and R2D converters are of the enclosed open frame type, meaning that they are un-potted. The converters are typically used in general purpose and industrial low power isolation and voltage matching applications where an SMD converter is required. The converter series feature an extended ambient temperature operating range of -40°C to +100°C without derating and optional continuous short circuit protection. In addition to two isolation options and three different case formats, the converters are also available prepacked as tape and reel for use with automatic insertion machines.

### Selection Guide

Part Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)	Max Capacitive Load <sup>(1)</sup>
R2S**-xx3.3 (H)	5, 12, 15, 24	3.3	606	70-75	3300µF
R2S**-xx05 (H)	5, 12, 15, 24	5	400	76-84	1200µF
R2S**-xx09 (H)	5, 12, 15, 24	9	222	76-84	1200µF
R2S**-xx12 (H)	5, 12, 15, 24	12	167	76-85	680µF
R2S**-xx15 (H)	5, 12, 15, 24	15	133	76-85	680µF
R2S**-xx24 (H)	5, 12, 15, 24	24	83	76-85	220µF
R2D**-xx05 (H)	5, 12, 15, 24	±5	±200	75-80	±470µF
R2D**-xx09 (H)	5, 12, 15, 24	±9	±111	75-80	±470µF
R2D**-xx12 (H)	5, 12, 15, 24	±12	±83	75-83	±330µF
R2D**-xx15 (H)	5, 12, 15, 24	±15	±66	75-85	±330µF
R2D**-xx24 (H)	5, 12, 15, 24	±24	±42	75-85	±330µF

xx = Input Voltage. Other input and output voltage combinations available on request.

\* add Suffix "P" for Continuous Short Circuit Protection, e.g. R2S-0505/P, R2D-0505/HP

\* add suffix -R for tape&reel packing e.g. R2S-0505-R. For more details see Tapes Section.

### Case and Pinning Options (note restrictions on /H option)

- R2S\*\* : \*\* without marking denotes 5 pins out of 8 fitted (/H option available)  
 \*\* with marking **8** denotes 8 pins out of 8 fitted (/H option not available)  
 \*\* with marking **12** denotes 10 pins out of 12 fitted (/H option available)
- R2D\*\* : \*\* without marking denotes 6 pins out of 10 fitted (/H option available)  
 \*\* with marking **10** denotes with 10 pins out of 10 fitted (/H option not available)  
 \*\* with marking **12** denotes with 10 pins out of 12 fitted (/H option available)

### Specifications (measured at T<sub>A</sub> = 25°C, nominal input voltage, full load and after warm-up)

Input Voltage Range	±10%
Output Voltage Accuracy	±5%
Line Voltage Regulation	1.2%/1% of Vin max.
Load Voltage Regulation	3.3V output types 20% max.
(10% to 100% full load)	5V output type 15% max.
	9V, 12V, 15V, 24V output types 10% max.
Output Ripple and Noise (20MHz limited)	150mVp-p max.
Operating Frequency	20kHz min. / 40kHz typ. / 85kHz max.
Efficiency at Full Load	70% min. / 80% typ.
Minimum Load = 0%	Specifications valid for 10% minimum load only.

continued on next page

# ECONOLINE

## DC/DC-Converter

with 3 year Warranty

# RECOM

## 2 Watt


# SMD Single & Dual Output



**UL-60950-1 Certified**  
**EN-60950-1 Certified**  
**EN-60601-1 Certified\***  
 (\* /H suffix)

# R2S-R2D

## Derating-Graph (Ambient Temperature)

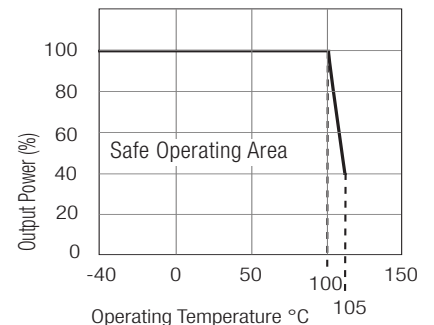

\*\*\*Any data referred to in this datasheet are of indicative nature and based on our practical experience only. For further details, please refer to our Application Notes.

Refer to Application Notes

## Specifications - Continued



Isolation Voltage	(tested for 1 second) (rated for 1 minute****)	1000VDC 500VAC / 60Hz
Isolation Voltage	(tested for 1 second) (rated for 1 minute****)	3000VDC 1500VAC / 60Hz
Isolation Capacitance		115pF max.
Isolation Resistance	(Viso 500V)	10 GΩ min.
Short Circuit Protection		1 Second
P-Suffix		Continuous
Operating Temperature Range (free air convection)		-40°C to +100°C (see Graph)
Storage Temperature Range		-55°C to +125°C
Reflow Temperature	ROHS compliant	245°C (30 sec), peak 255°C (5 sec) max.
Vapor Phase Process	(for more details see Application Notes)	230°C (90 sec) max.
Relative Humidity		95% RH
Package Weight	R2S, R2S8 R2D, R2D10 R2S12, R2D12	1.4g 1.5g 1.6g
Packing Quantity	R2S, R2S8 R2S12, R2D, R2D10, R2D12 All Types	39 pcs per Tube 33 pcs per tube 250 pcs per Reel
MTBF (+25°C) (+85°C)	} Detailed Information see Application Notes chapter "MTBF" using MIL-HDBK 217F	886 x 10 <sup>3</sup> hours
		128 x 10 <sup>3</sup> hours
Certifications		
CB Test Report	Report: US/14402/UL	
UL General Safety	Report: E358085	UL 60950-1 2nd Ed.
CUL General Safety		C22.2 No. 60950-1-03
EN Medical Safety	Report: MDD1205098-2 + RM1205098-2 Medical Report + ISO14971 Risk Assessment	IEC/EN 60601-1 3rd Ed.
EN General Safety	Report: SPCLVD 1211033-3	EN60950-1: 2006 + A12:2011
Conducted / Radiated Emissions	EN55022	Level A

### Notes



Note 1 Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage to the converter.

## Typical Characteristics


### R2S-xx05

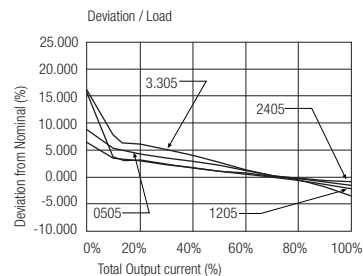

### R2D-xx05

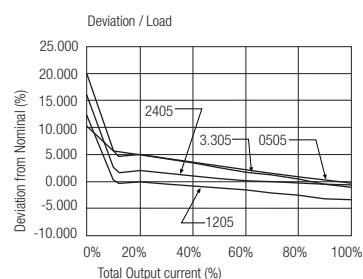


## EMC Filtering - Suggestion for EN55022 Class B (Conducted and Emitted)

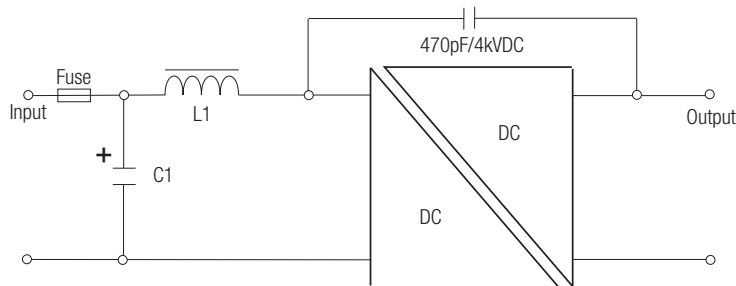

Standard and /H versions

C1	L1	Vin
2.2µF	4.7µH	5V
2.2µF	10µH	12V
2.2µF	22µH	15V
4.7µF	22µH	24V

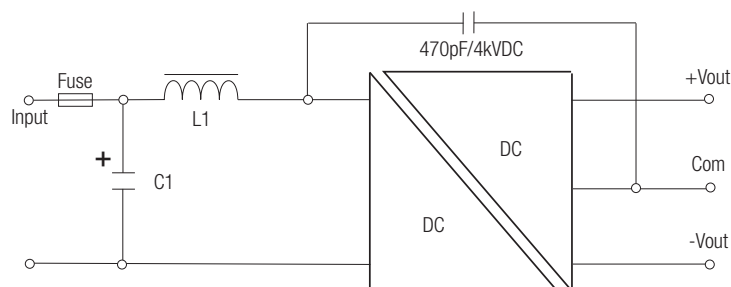



/P and /HP versions

C1	L1	Vin
10µF	10µH	5V
4.7µF	22µH	12V
4.7µF	22µH	15V
10µF	47µH	24V



C1 = MLCC  
L1 = SMD Inductor

## Package Style and Pinning (mm)

8 PIN Single SMD Package



10 PIN Dual SMD Package

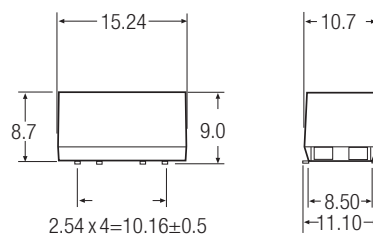


### Pin Connections


Pin #	Single	Dual
1	-Vin	-Vin
2	+Vin	+Vin
4	-Vout	Com
5	+Vout	-Vout
7	No Pin	+Vout
8	NC	No Pin
10	No Pin	NC

NC = No Connection

### Recommended Footprint Details

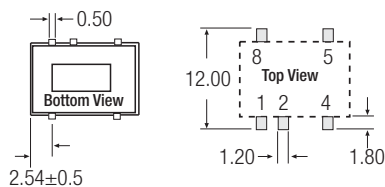

### Recommended Footprint Details

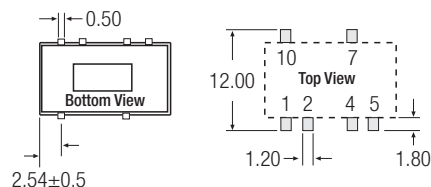

XX.X ± 0.5 mm  
XX.XX ± 0.25 mm

R2S\*\* : \*\* without marking denotes 5 pins out of 8 fitted (includes /H option)  
\*\* with marking **8** denotes 8 pins out of 8 fitted (/H option not available)


e.g. R2S-0505, R2S-0505/H, R2S-0505/HP  
e.g. R2S8-0505, R2S8-0505/P

R2D\*\* : \*\* without marking denotes 6 pins out of 10 fitted (includes /H option)  
\*\* with marking **10** denotes with 10 pins out of 10 fitted (/H option not available)

e.g. R2D-0505, R2D-0505/H, R2D-0505/HP  
e.g. R2D10-0505, R2D10-0505/P


## Package Style and Pinning (mm)

### Full 8 PIN Single SMD Package




Note: /H option is not available in these pin packages

### Full 10 PIN Dual SMD Package

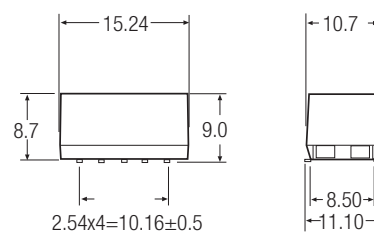

### Recommended Footprint Details

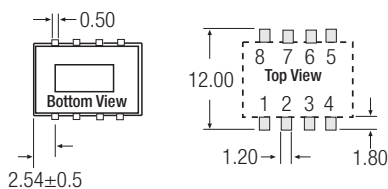


### Pin Connections

Pin #	Single	Dual
1	-Vin	-Vin
2	+Vin	+Vin
3	NC	NC
4	-Vout	Com
5	+Vout	-Vout
6	NC	NC
7	NC	+Vout
8	NC	NC
9	-	NC
10	-	NC

NC = No Connection


XX.X ± 0.5 mm  
XX.XX ± 0.25 mm

### Recommended Footprint Details

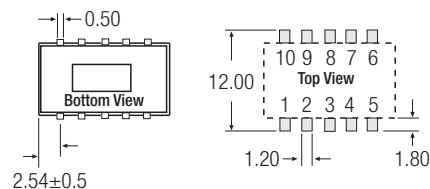

### 12 PIN Single and Dual SMD Package

Note: /H option is available in this pin package

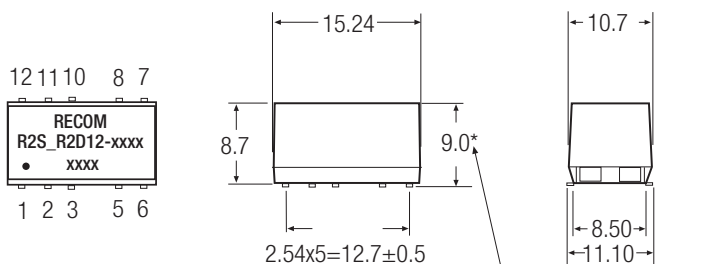


### Pin Connections

Pin #	Single	Dual
1	-Vin	-Vin
2	+Vin	+Vin
3	NC	NC
5	-Vout	Com
6	NC	-Vout
7	NC	NC
8	+Vout	+Vout
10	NC	NC
11	NC	NC
12	NC	NC

NC = No Connection

XX.X ± 0.5 mm  
XX.XX ± 0.25 mm

### Recommended Footprint Details

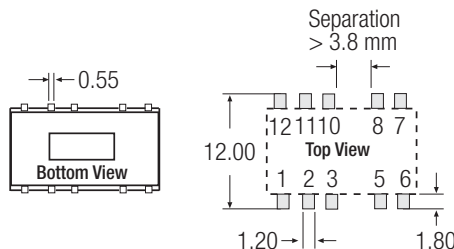

R2S\*\* : \*\* with marking 12 denotes 10 pins out of 12 fitted (includes /H option)  
R2D\*\* : \*\* with marking 12 denotes 10 pins out of 12 fitted (includes /H option)

e.g. R2S12-0505, R2S12-0505/H, R2S12-0505/HP  
e.g. R2D12-0505, R2D12-0505/H, R2D12-0505/HP

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## RECOM:

[R2S-0505](#) [R2S-1205](#) [R2S-1212](#) [R2D-0505](#) [R2D-0505/H](#) [R2D-0505/HP](#) [R2D-0505/HP-R](#) [R2D-0505/H-R](#) [R2D-0505/P](#) [R2D-0505/P-R](#) [R2D-0505-R](#) [R2D-0509](#) [R2D-0509/H](#) [R2D-0509/HP](#) [R2D-0509/HP-R](#) [R2D-0509/H-R](#) [R2D-0509/P](#) [R2D-0509/P-R](#) [R2D-0509-R](#) [R2D-0512](#) [R2D-0512/H](#) [R2D-0512/HP](#) [R2D-0512/HP-R](#) [R2D-0512/H-R](#) [R2D-0512/P](#) [R2D-0512/P-R](#) [R2D-0512-R](#) [R2D-0515](#) [R2D-0515/H](#) [R2D-0515/HP](#) [R2D-0515/HP-R](#) [R2D-0515/H-R](#) [R2D-0515/P](#) [R2D-0515/P-R](#) [R2D-0515-R](#) [R2D-0524](#) [R2D-0524/H](#) [R2D-0524/HP](#) [R2D-0524/HP-R](#) [R2D-0524/H-R](#) [R2D-0524/P](#) [R2D-0524/P-R](#) [R2D-0524-R](#) [R2D10-0505](#) [R2D10-0505/P](#) [R2D10-0505/P-R](#) [R2D10-0505-R](#) [R2D10-0509](#) [R2D10-0509/P](#) [R2D10-0509/P-R](#) [R2D10-0509-R](#) [R2D10-0512](#) [R2D10-0512/P](#) [R2D10-0512/P-R](#) [R2D10-0512-R](#) [R2D10-0515](#) [R2D10-0515/P](#) [R2D10-0515/P-R](#) [R2D10-0515-R](#) [R2D10-0524](#) [R2D10-0524/P](#) [R2D10-0524/P-R](#) [R2D10-0524-R](#) [R2D10-1205](#) [R2D10-1205/P](#) [R2D10-1205/P-R](#) [R2D10-1205-R](#) [R2D10-1209](#) [R2D10-1209/P](#) [R2D10-1209/P-R](#) [R2D10-1209-R](#) [R2D10-1212](#) [R2D10-1212/P](#) [R2D10-1212/P-R](#) [R2D10-1212-R](#) [R2D10-1215](#) [R2D10-1215/P](#) [R2D10-1215/P-R](#) [R2D10-1215-R](#) [R2D10-1224](#) [R2D10-1224/P](#) [R2D10-1224/P-R](#) [R2D10-1224-R](#) [R2D10-1505](#) [R2D10-1505/P](#) [R2D10-1505/P-R](#) [R2D10-1505-R](#) [R2D10-1509](#) [R2D10-1509/P](#) [R2D10-1509/P-R](#) [R2D10-1509-R](#) [R2D10-1512](#) [R2D10-1512/P](#) [R2D10-1512/P-R](#) [R2D10-1512-R](#) [R2D10-1515](#) [R2D10-1515/P](#) [R2D10-1515/P-R](#) [R2D10-1515-R](#) [R2D10-1524](#)