



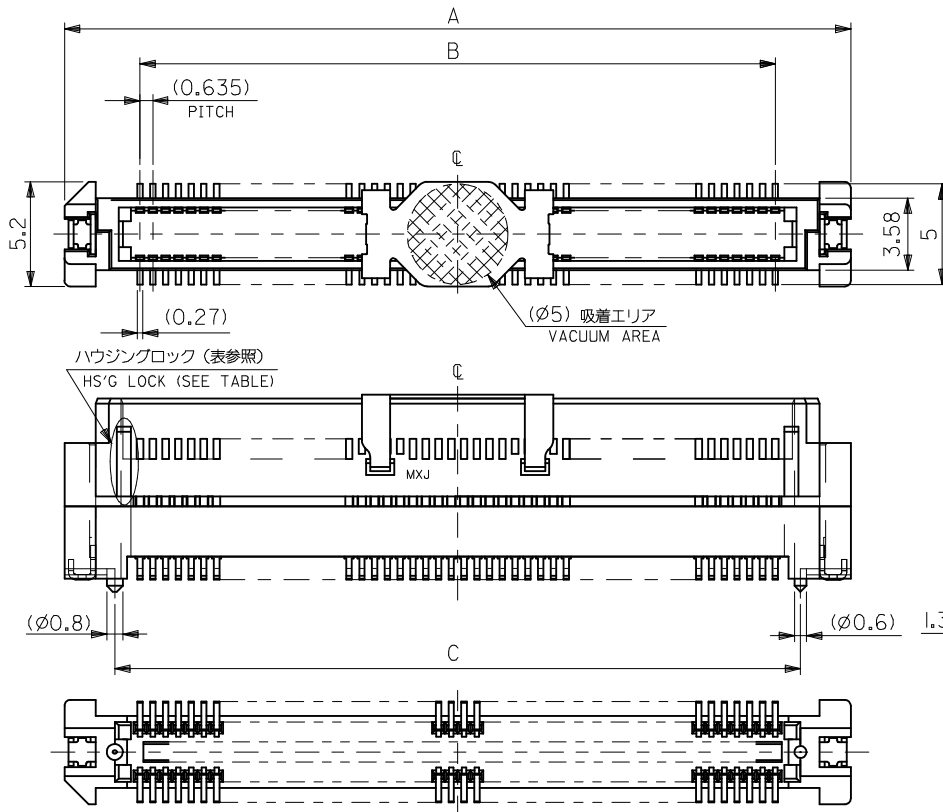

NOTES 1. 材質 MATERIAL


ハウジング: ガラス入りPPS、茶色、UL94V-0
 HOUSING: POLYPHENYLENE SULFIDE, GLASS FILLED, BROWN, UL94V-0
 ターミナル: 銅合金 (t=0.2)、ニッケルメッキ下地1.5マイクロメートル以上
 TERMINAL: COPPER ALLOY, UNDER-PLATING: NICKEL 1.5 MICROMETER MIN.
 接点部: 金メッキ 0.25マイクロメートル以上
 CONTACT AREA: GOLD 0.25 MICROMETER MIN.
 半田付け部: 錫メッキ1.0マイクロメートル以上
 SOLDER TAIL AREA: TIN 1.0 MICROMETER MIN.
 ネール: リン青銅(t=0.2)、ニッケルメッキ下地1.0マイクロメートル以上
 NAIL: PHOSPHOR BRONZE, UNDER-PLATING: NICKEL 1.0 MICROMETER MIN.
 鍍メッキ1.0マイクロメートル以上
 TIN 1.0 MICROMETER MIN.
 吸着カバー: ステンレス (t=0.2)
 VACUUM COVER: STAINLESS STEEL

2. テールのバラツキ寸法
 TAIL COPLANARITY
 テール平坦度は、0.1ミリ以下とする。
 TAILS COPLANARITY TO BE 0.1 MILLIMETER MAX.

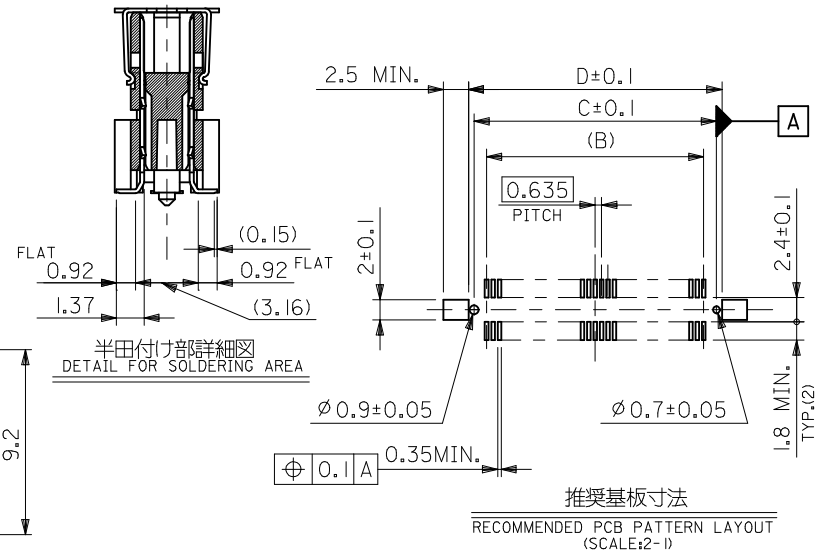

無し NO	66.47	65.37	62.865	70.37	53627-2074	—	200
	53.77	52.67	50.165	57.67	—	53627-1675	160
	47.42	46.32	43.815	51.32	53627-1474	—	140
	41.07	39.97	37.465	44.97	-1274	—	120
	34.72	33.62	31.115	38.62	-1074	—	100
有り YES	31.55	30.45	27.94	35.45	-0974	—	90
	28.37	27.27	24.765	32.27	-0874	—	80
	25.2	24.1	21.59	29.1	-0774	—	70
	22.02	20.92	18.415	25.92	-0674	—	60
	18.85	17.75	15.24	22.75	-0574	—	50
ハウジングロック HSG LOCK	15.67	14.57	12.065	19.57	-0474	—	40
	12.5	11.4	8.89	16.4	-0374	—	30
	9.32	8.22	5.715	13.22	53627-0274	—	20
CONNECTOR SERIES No. 53627-**72							
エンボス梱包 EMBOSSED PACKAGE							スティック梱包 STICK PACKAGE
D C B A							極数 CIRCUITS

REVISED		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO. J2017-0317		0.25 UNDER ±0.03		MM ONLY		---		METRIC		⊕ □	
DRWN: KNO2		0.25 OVER 0.5 UNDER ±0.05		DRAWN BY Y. SAKIYAMA		DATE 2004/03/05		TITLE		0.635 PITCH B/B CONN. PLUG HSG COVER ASSY -LEAD FREE-	
CHKD:		0.5 OVER 0 UNDER ±0.1		CHECKED BY		DATE		M. SASAO		2004/03/05	
APPR: MSASAO		10 OVER 30 UNDER ±0.2		APPROVED BY		DATE		M. SASAO		2004/03/05	
REV		30 OVER ±0.3		MATERIAL NO.		DOCUMENT NO.		SD-53627-001		SHEET NO. 1 OF 1	
C		ANGULAR ±3 °		SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3							

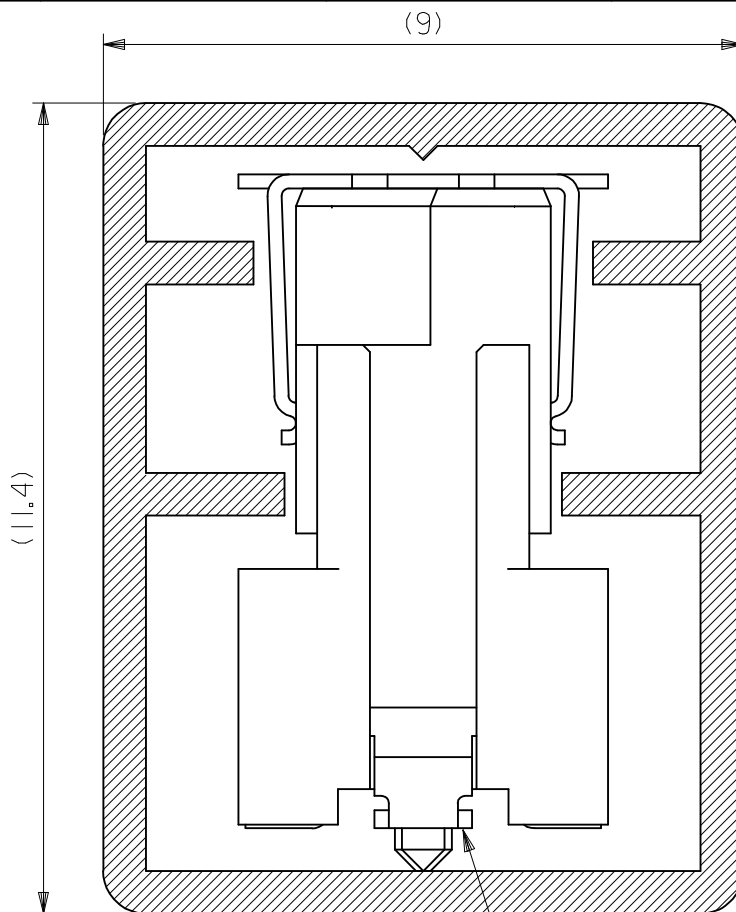

NOTES

- 1。スティック両端はキャップ止め。
BOTH ENDS WITH CAPS.
- 2。全長： 508^{+1.0}_{-2.5}
TOTAL LENGTH
- 3。肉厚：0.6±0.2
THICKNESS
量産対応済の極数については
SD-53627-001 を参照下さい。
SEE SD-53627-001
FOR AVAIRABLE ITEMS.
- 4。本製品は 53627-***5 の
鉛フリー品である。
THIS PRODUCT IS LEAD FREE
OF 53627-***5.

スティック
STICK

53627-***72
CONN.

MODEL NO.		53627-**75		梱包数量 QUANTITY	MATERIAL NO.		極数 CIRCUITS
DIMENSION STYLE MM ONLY		SCALE 10:1		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
DRAWN BY Y. SAKIYAMA		DATE 04/03/05		TITLE STICK PACKAGE FOR 53627-**72 -LEAD FREE- molex			
CHECKED BY M. SASAO		DATE 04/03/05					
APPROVED BY M. SASAO		DATE 04/03/05					
MATERIAL NO.		DOCUMENT NO.					
SEE CHART		SD-53627-003				1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

MATERIAL

スティック：ポリ塩化ビニル
STICK: P.V.C

REVISED
EC NO: J2017-0317
DRWN: MKN02
CHKD:
APPR: MSASAO
2016/12/21
2017/03/15
A

GENERAL TOLERANCES (UNLESS SPECIFIED)		DESCRIPTION
0.25 UNDER	±0.03	
0.25 OVER 0.5 UNDER	±0.05	
0.5 OVER 1.0 UNDER	±0.1	
1.0 OVER 10 UNDER	±0.2	
10 OVER 30 UNDER	±0.25	
30 OVER	±0.3	
ANGULAR	±---	°
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE MM ONLY	
DRAWN BY Y. SAKIYAMA	DATE 04/03/05
CHECKED BY M. SASAO	DATE 04/03/05
APPROVED BY M. SASAO	DATE 04/03/05
MATERIAL NO.	
SEE CHART	

SIZE A4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
------------	--	--	--	--	--

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

53627-1675