

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0						
		K18		REVISED PER ECO-11-004587	11MAR11	RK	HMR

PHYSICAL PROPERTIES:
 HOUSING MATERIAL: THERMOPLASTIC, PC
 FLAMABILITY: UL94V-0
 COLOR: BLACK


TERMINAL:
 TERMINALS: BRASS, TIN PLATED
 SCREWS: 6-32 STEEL, NICKEL PLATED

MECHANICAL:
 PITCH: .437
 WIRE RANGE: 14-22 AWG
 RECOMMENDED TIGHTENING TORQUE: 12IN-LB

ELECTRICAL PROPERTIES:
 MAX CURRENT: 25A
 OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
 OPERATING TEMP: -40°C TO 120°C

- 1 SEE FIGURE.
- 2 PRELIMINARY PART NUMBER.
- 3 STAINLESS STEEL SCREWS.
- 4 WHITE INK STAMP.
- 5 TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA.

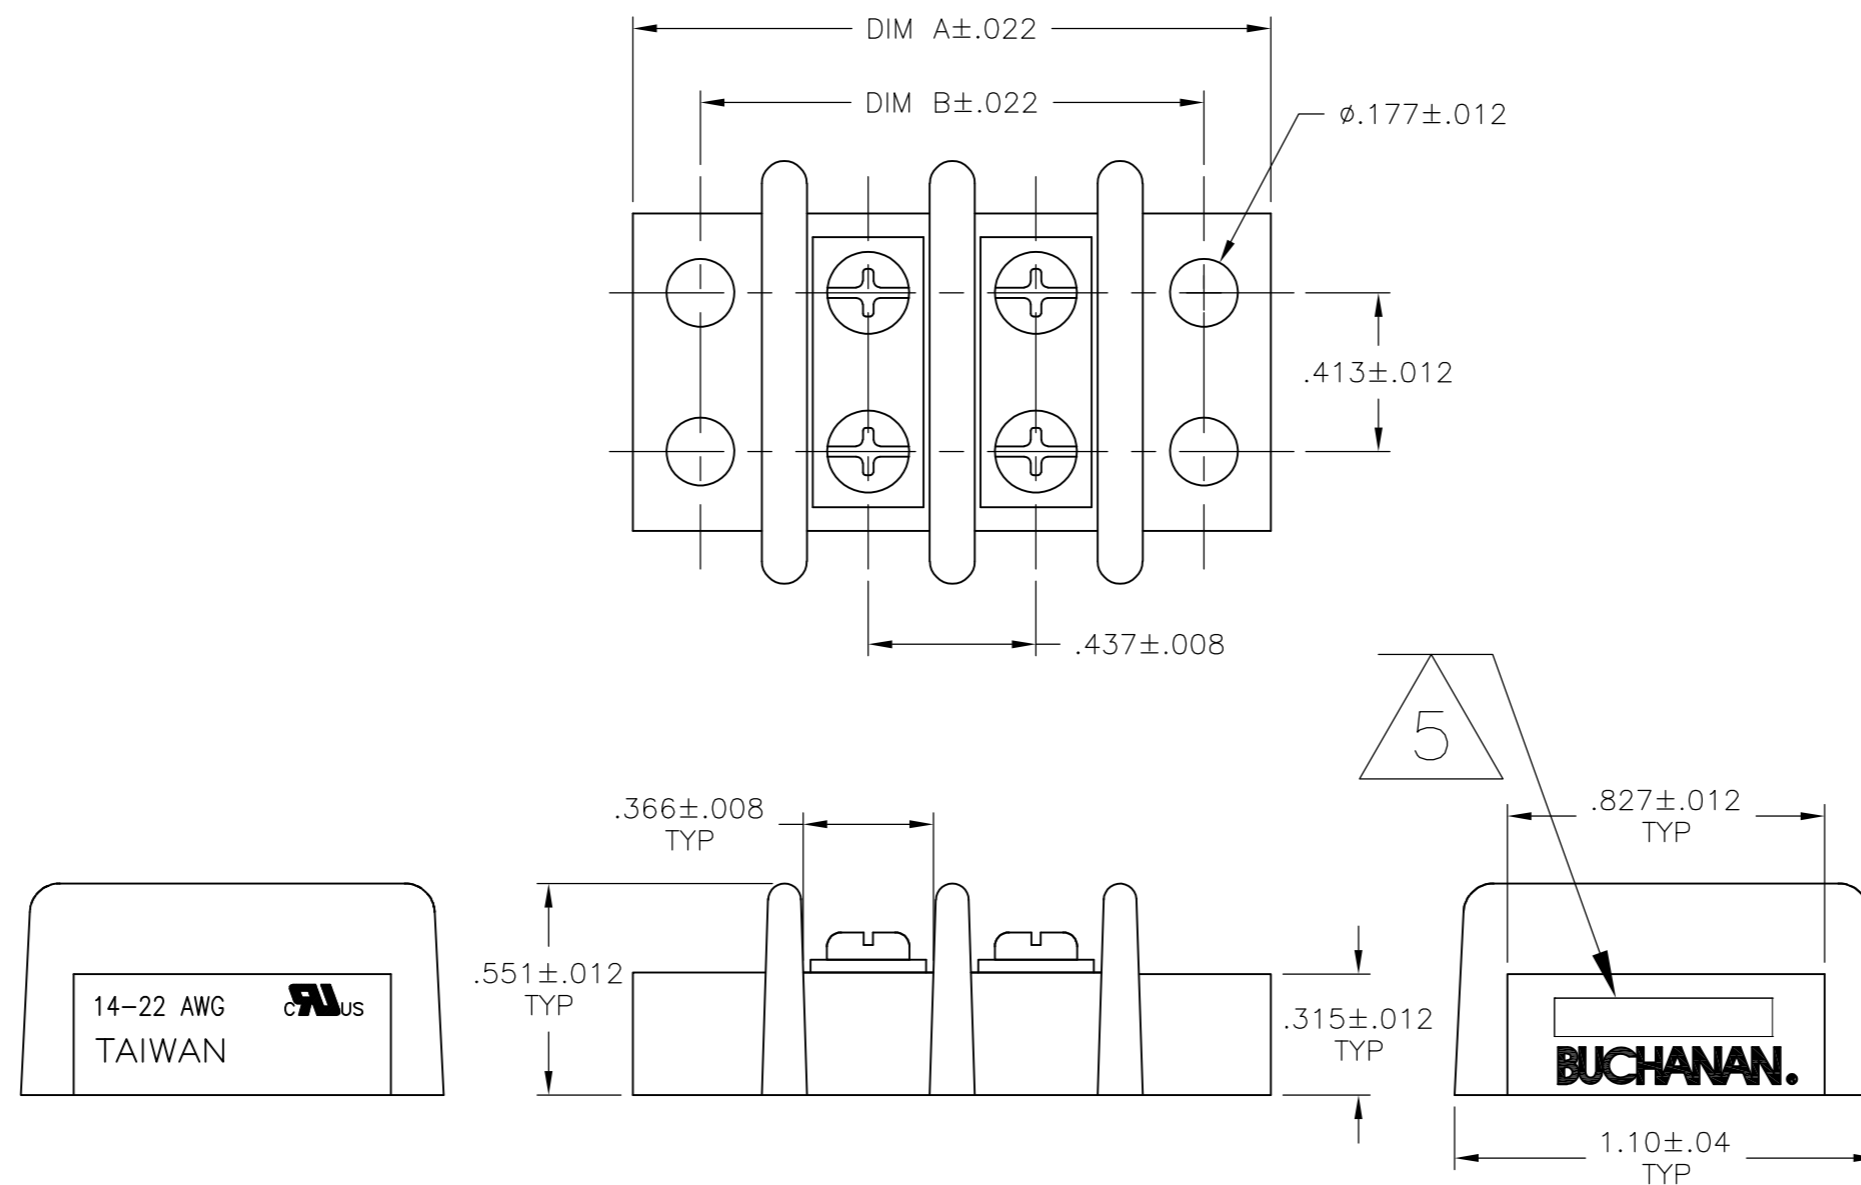

	5.646	5.992	12	4-1546670-2
	9.142	9.488	20	2-1546670-0
	8.705	9.051	19	1-1546670-9
2	8.268	8.614	18	3-1546670-0
	8.268	8.614	18	1-1546670-8
	7.831	8.177	17	1-1546670-7
	7.394	7.740	16	1-1546670-6
	6.957	7.303	15	1-1546670-5
	6.520	6.866	14	1-1546670-4
	6.083	6.429	13	1-1546670-3
	5.646	5.992	12	1-1546670-2
	5.209	5.555	11	1-1546670-1
4	4.772	5.118	10	4-1546670-3
2	4.772	5.118	10	3-1546670-8
	4.772	5.118	10	1-1546670-0
2	4.335	4.681	9	3-1546670-5
2	4.335	4.681	9	3-1546670-2
	4.335	4.681	9	1546670-9
1	3.898	4.244	8	4-1546670-1
3	3.898	4.244	8	3-1546670-6
2	3.898	4.244	8	3-1546670-4
2	3.898	4.244	8	3-1546670-3
	3.898	4.244	8	1546670-8
	3.461	3.807	7	1546670-7
1	3.024	3.370	6	3-1546670-1
	3.024	3.370	6	1546670-6
1	2.587	2.933	5	2-1546670-8
1	2.587	2.933	5	2-1546670-7
	2.587	2.933	5	1546670-5
2	2.496	2.933	4	3-1546670-9
1	2.150	2.496	4	2-1546670-9
	2.150	2.496	4	1546670-4
	1.713	2.059	3	1546670-3
	1.276	1.622	2	1546670-2
	DIM B	DIM A	NO OF POS	PART NUMBER



THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN S SCHEGEL 4/4/03	TE Connectivity DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING
	0 PLC ± -	CHK C RICHARD 4/4/03	
	1 PLC ± -	APVD C RICHARD 4/4/03	
	2 PLC ± .01	PRODUCT SPEC	
	3 PLC ± .005	APPLICATION SPEC	SIZE A2
	4 PLC ± -		CAGE CODE 00779
	ANGLES ± 3°		DRAWING NO C-1546670
MATERIAL -	FINISH -	WEIGHT -	RESTRICTED TO -
		CUSTOMER DRAWING	SCALE NTS SHEET 1 of 3 REV K18

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.



LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD			
FT	0	SEE SHEET 1	-	-	-			

DOUBLE SIDED, DOUBLE HOLE
 QC TAB, QTY 5

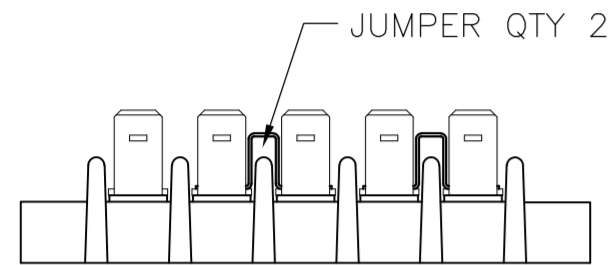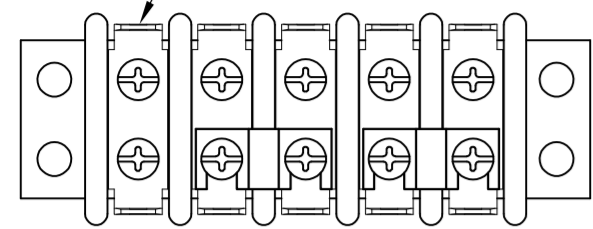



2-1546670-7

DOUBLE SIDED, DOUBLE HOLE
 QC TAB, QTY 5

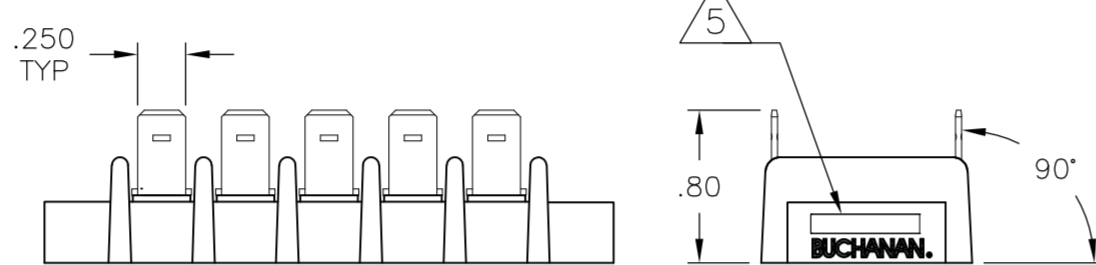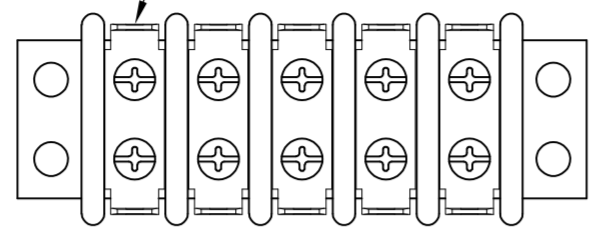

2-1546670-8


JUMPER, QTY 1

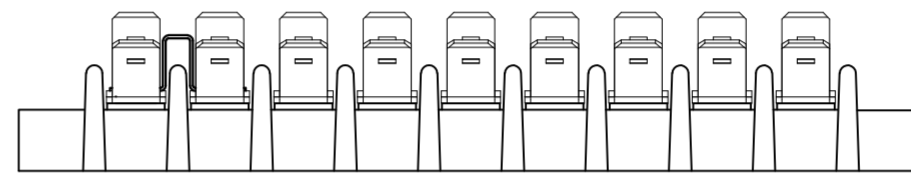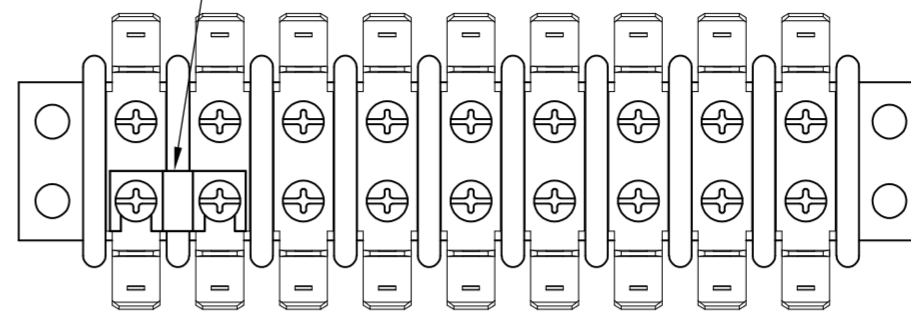



3-1546670-2

DOUBLE SIDED, DOUBLE HOLE
 45° QC TAB, QTY 9

DOUBLE SIDED, DOUBLE HOLE
 90° QC TAB, QTY 9


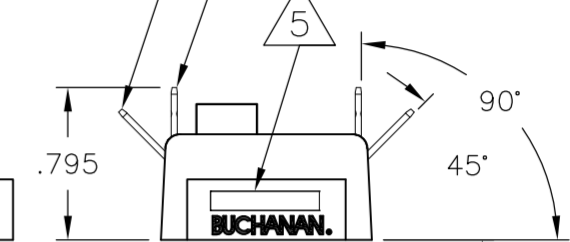


DOUBLE SIDED, DOUBLE HOLE
 QC TAB, QTY 5

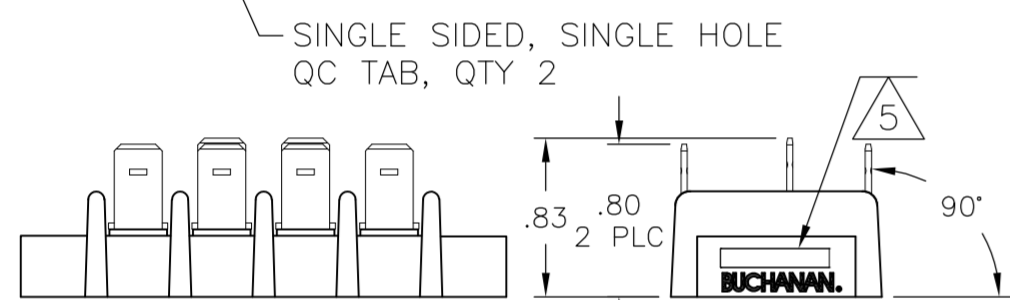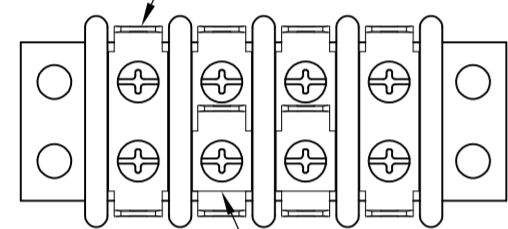

2-1546670-9



SINGLE SIDED, DOUBLE HOLE
 QC TAB, QTY 6

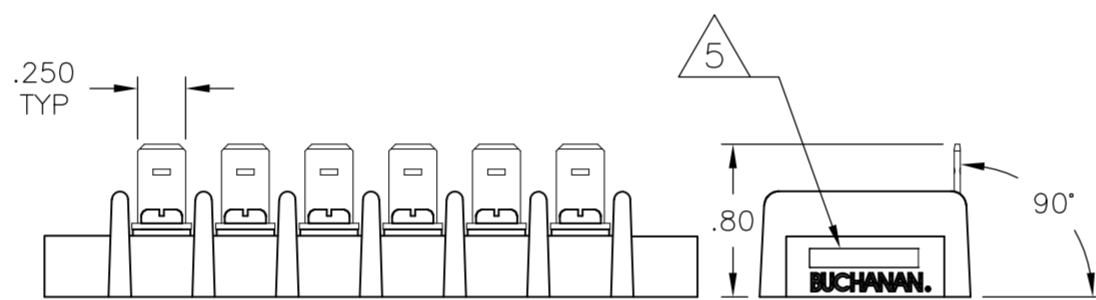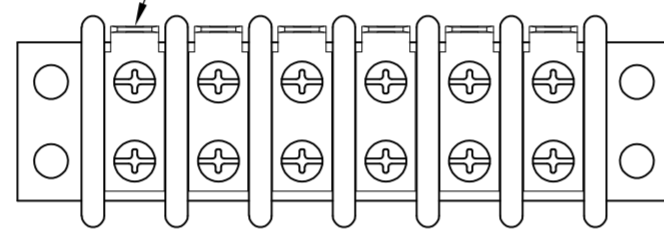

3-1546670-1

DOUBLE SIDED, DOUBLE HOLE
 FLAT QC TAB, QTY 8.


JUMPER, QTY 2

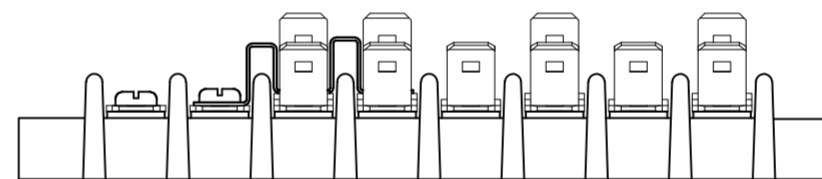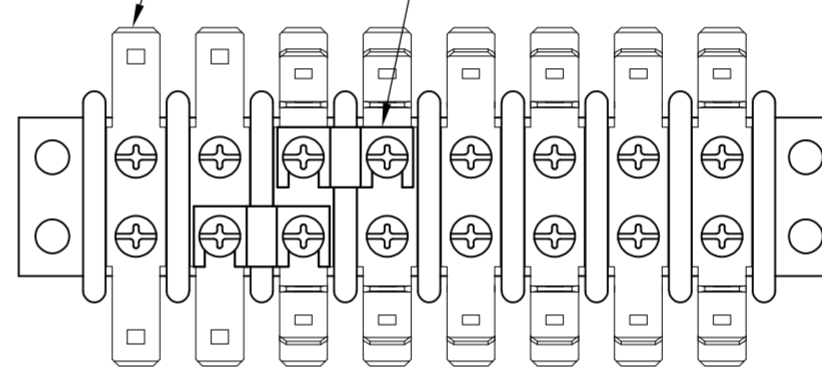



3-1546670-3

DOUBLE SIDED, DOUBLE HOLE
 45° QC TAB, QTY 6

DOUBLE SIDED, DOUBLE HOLE
 90° QC TAB, QTY 4


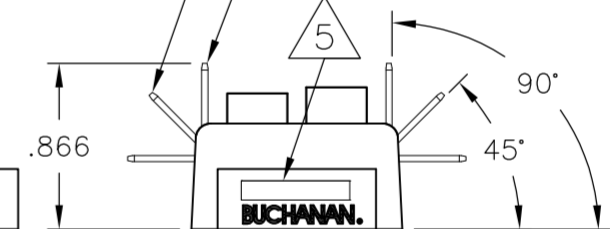


SINGLE SIDED, DOUBLE HOLE
 QC TAB, QTY 18

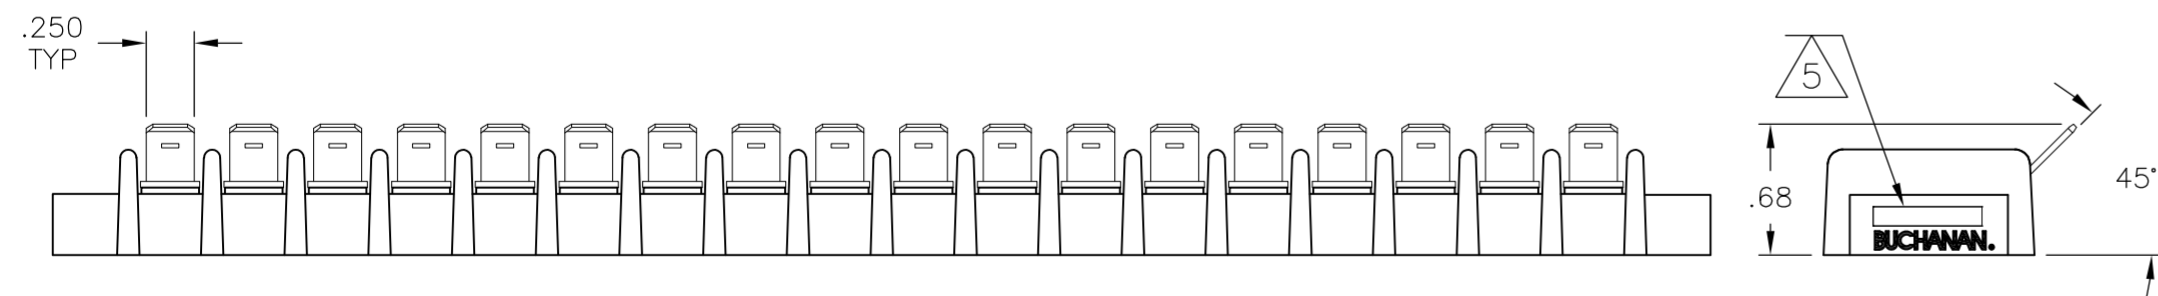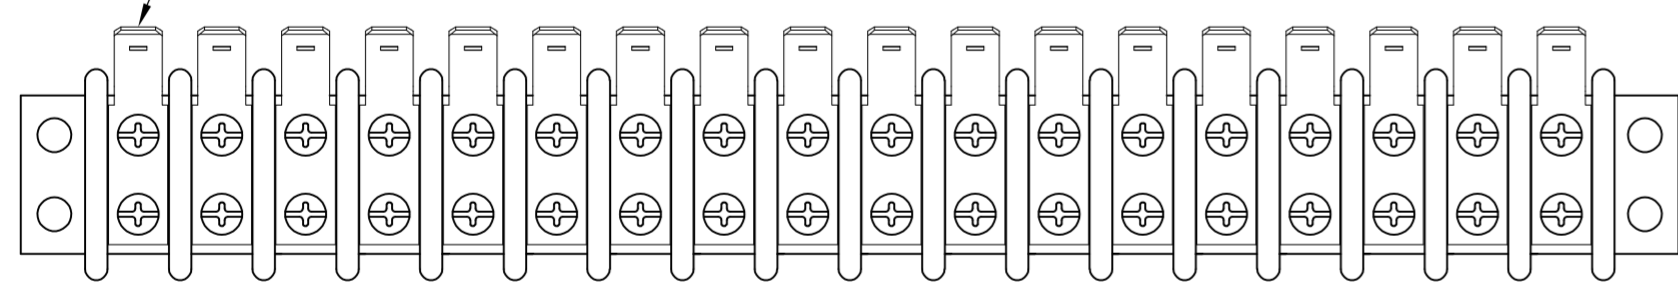

3-1546670-0

DOUBLE SIDED, DOUBLE HOLE
 FLAT QC TAB, QTY 8.

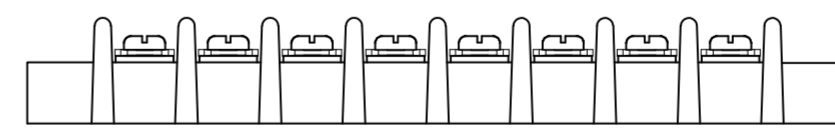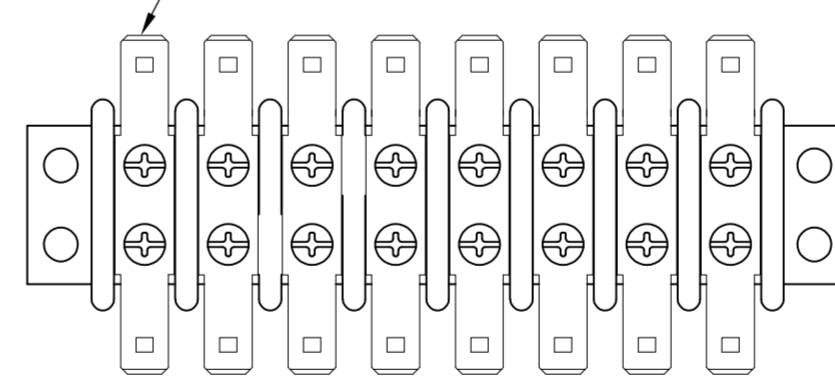

3-1546670-4

11.764	12.110	26	2-1546670-6
11.327	11.673	25	2-1546670-5
10.90	11.236	24	2-1546670-4
10.453	10.799	23	2-1546670-3
10.016	10.362	22	2-1546670-2
9.579	9.925	21	2-1546670-1
9.142	9.488	20	3-1546670-7
DIM B	DIM A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S SCHEGEL	4/4/03
DIMENSIONS: INCHES		CHK	C RICHARD	4/4/03
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	C RICHARD	4/4/03
0 PLC ± -		PRODUCT SPEC		
1 PLC ± -		APPLICATION SPEC		
2 PLC ± .01		WEIGHT -		
3 PLC ± .005		SIZE A2		
4 PLC ± -		CAGE CODE 00779		
ANGLES ± 3°		DRAWING NO C=1546670		
FINISH -		RESTRICTED TO -		
MATERIAL -		CUSTOMER DRAWING		
		SCALE NTS SHEET 2 OF 3 REV K18		

TE Connectivity		NAME	
		DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C=1546670	-

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
FT	0	SEE SHEET 1	-	-	-		



3-1546670-5



4-1546670-3

SINGLE SIDED, DOUBLE HOLE 45° QC TAB, QTY 10

SINGLE SIDED, DOUBLE HOLE 90° QC TAB, QTY 10




SINGLE SIDED, DOUBLE HOLE 90° QC TAB, QTY 10




3-1546670-7




3-1546670-8

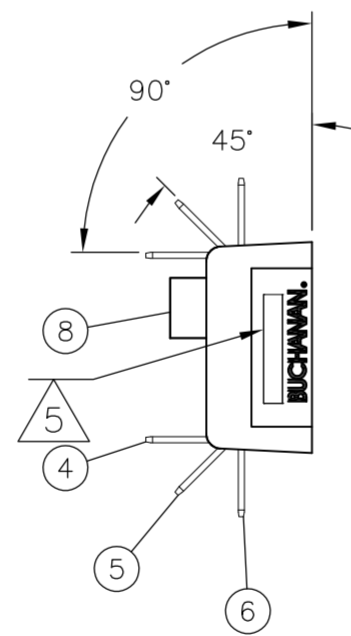

3-1546670-9

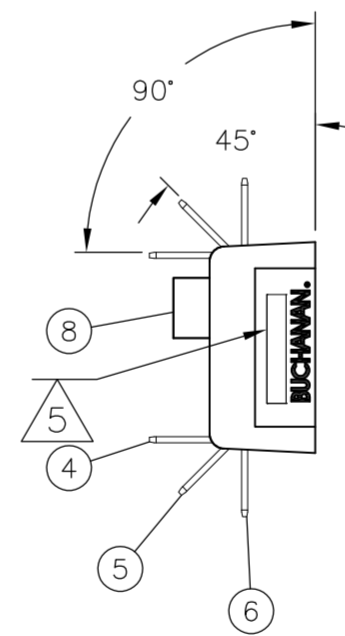

4-1546670-1

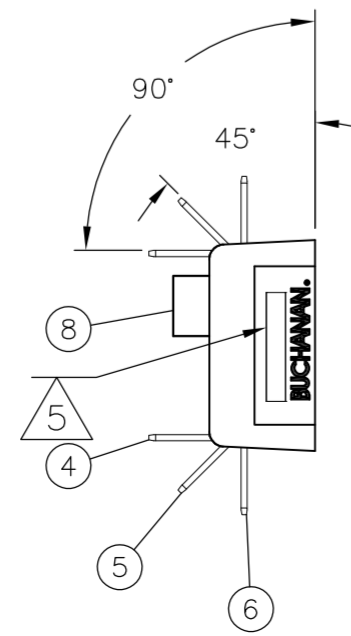

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHEGEL 4/4/03	TE Connectivity	
DIMENSIONS: INCHES		CHK C RICHARD 4/4/03		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C RICHARD 4/4/03	NAME	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING	
2 PLC ± .01	3 PLC ± .005	APPLICATION SPEC	SIZE	CAGE CODE
4 PLC ± -	ANGLES ± 3'	WEIGHT -	A2	00779
MATERIAL -	FINISH -	CUSTOMER DRAWING	DRAWING NO	RESTRICTED TO
			C=1546670	-
			SCALE NTS	SHEET 3 of 3
			REV	K18

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1546670-2](#)