#### Magnetically Compensated Choke, 1-phase, flat design



See below:

### **Approvals and Compliances**

#### **Description**

- Current compensated choke
- 1-phase choke
- THT-terminals
- Inductor horizontally positioned in housing
- SMD version on request

#### **Applications**

- Attenuation of common mode interferences
- Designed for 230/400 VAC applications
- Chopper amplifiers
- DC drives and stepper motor controls
- Switching power supplies

#### Weblinks

pdf data sheet, html datasheet, General Product Information, Approvals, Distributor-Stock-Check, Detailed request for product, SPICE Library

Technical Data	
Rated voltage	up to 440 VAC
Rated Current	0.4 - 6.3 A @ Ta 40 °C
Rated inductance	0.6 - 40 mH, Tol30% +50%
Power Operating Frequency	50 - 400 Hz
Terminal Type	THT
Weight	5 - 16g
Material: Housing	UL 94V-0

UL 94V-0

Test Voltage	1.8 kV, 50 Hz, 1 min, winding to winding
Isolation Voltage	2kV eff., winding to ambient
Climatic Category	25/100/21 acc. to IEC 60068-1
Allowable Operation Temp.	-25°C to 100°C

#### **Approvals and Compliances**

Sealing Compound

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

#### **Approvals**

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: DFKF2

Approval Logo Certificates **Certification Body** Description UL **UL Approvals** UL File Number: E72928 C**FL** us

#### **Application standards**

Application standards where the product can be used

Organization Description Design Standard Designed for applications acc. IEC/UL 62368-1 IEC 62368-1 includes the basic requirements for safety of audio, video, <u>IEC</u> information technology and office equipment.


## Compliances


The product complies with following Guide Lines

Identification	Details	Initiator	Description
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
ROHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
<b>©</b>	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

## Dimension [mm]


Case 04-2 Case 15-2

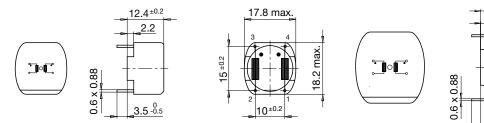




## **Diagrams**

RFI suppression of switching power supply



- 1) Power line
- 2) Switching Power Supply
- 3) Interference current


Noise suppression filter




- 1) Power line
- 2) Equipment
- 3) Interference current

## Impedance curves

## DFKF-18-xxxx



## DFKF-28-xxxx



## **All Variants**

I <sub>n</sub> [A]	L <sub>n</sub> [mH]	R <sub>cu</sub> [mΩ]	Tripped Power Dissipation [W]	f <sub>RES</sub> [MHz]	Weight [g]	Housings	Packing unit [pcs.]	Order Number
0.4	40	1200	0.4	0.11	5 g	04-2	48	DFKF-18-0001
0.6	40	1000	0.7	0.2	16 g	15-2	40	DFKF-28-0001
1	20	360	0.7	0.28	16 g	15-2	40	DFKF-28-0002
1.2	6.8	200	0.6	0.45	5 g	04-2	45	DFKF-18-0003
1.4	27	310	-	-	16 g	15-2	40	DFKF-28-0003
1.5	3.3	110	0.5	1.2	5 g	04-2	45	DFKF-18-0004
2	1.8	60	-	-	5 g	04-2	45	DFKF-18-0005
2	6	100	0.8	0.3	16 g	15-2	40	DFKF-28-0004
4	0.7	16	0.5	2.5	5 g	04-2	45	DFKF-18-0006
4	1.5	28	0.9	1.3	16 g	15-2	40	DFKF-28-0005
6.3	0.6	13	1	2.5	16 g	15-2	40	DFKF-28-0006

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Schurter:

<u>DFKF-28-0005</u> <u>DFKF-18-0004</u> <u>DFKF-18-0006</u> <u>DFKF-28-0001</u> <u>DFKF-28-0002</u> <u>DFKF-28-0004</u> <u>DFKF-28-0006</u> DFKF-18-0001 <u>DFKF-18-0003</u> <u>DFKF-18-0005</u> <u>DFKF-18-0002</u> <u>DFKF-28-0003</u>