




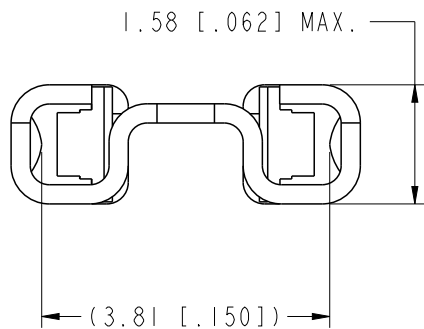


PRODUCT NUMBER	TERMINAL BODY	TERMINAL SPRING
76113-001	1/4 HARD BRASS w/40u"/1.02u Au OR GXT IN CONTACT AREA	.0048/.122 THK. HEAT TREATED Be-Cu w/ GOLD FLASH
76113-002	1/2 HARD BRASS W/TIN-LEAD PLATING	.0048/.122 THK. HEAT TREATED Be-Cu w/ TIN PLTG.
76113-003	OBSOLETE	OBSOLETE
76113-004	1/4 HARD Cu Ni w.001/.03 MIN. GOLD DOT	0.0048/.122 THK. HEAT TREATED Be-Cu w/ GOLD FLASH
76113-101	1/4 HARD BRASS w/40u"/1.02u Au OR GXT IN CONTACT AREA	.0048/.122 THK. HEAT TREATED Be-Cu w/ GOLD FLASH
76113-102	1/4 HARD BRASS w/40u"/1.02u Au OR GXT IN CONTACT AREA,GOLD FLASH IN OTHER AREA	.0048/.122 THK. HEAT TREATED Be-Cu w/ GOLD FLASH
76113-103	1/4 HARD BRASS w/GOLD FLASH	.0048/.122 THK. HEAT TREATED Be-Cu w/ GOLD FLASH

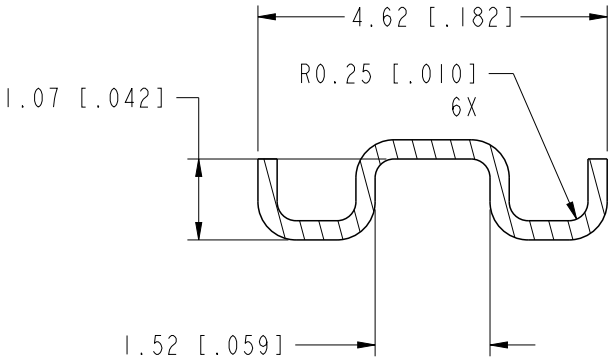

DISTANCE BETWEEN GOLD DOTS WHEN APPLICABLE

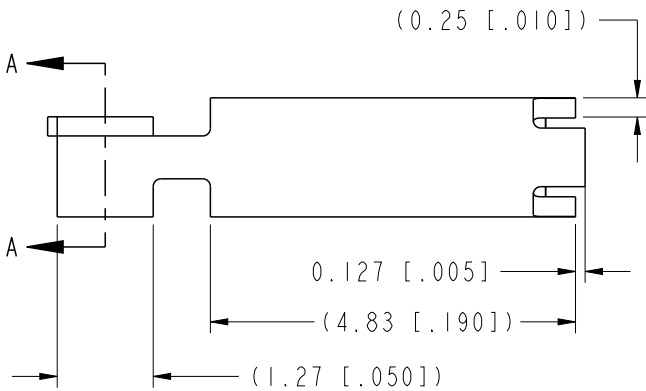


SECTION A-A


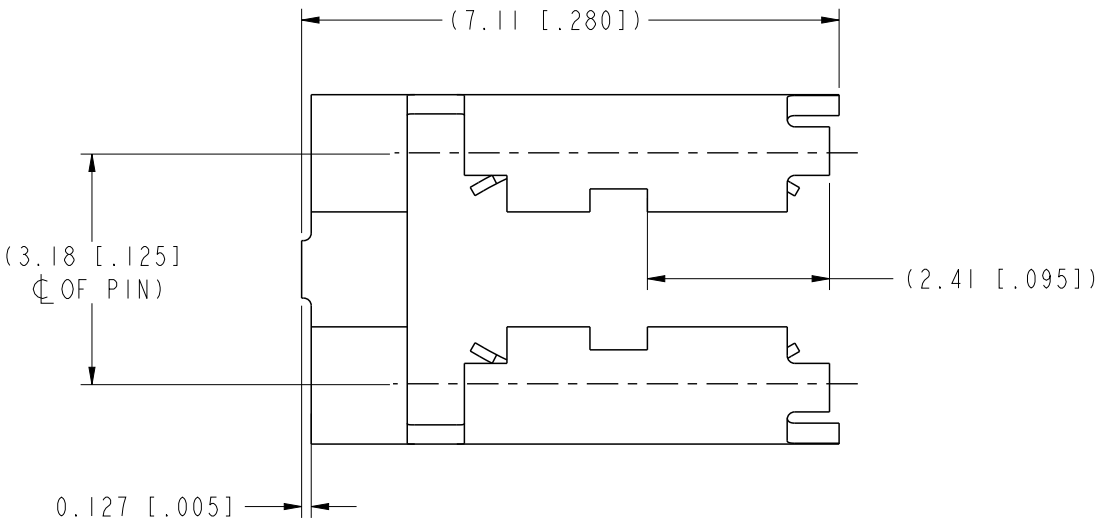


- NOTES:
- 1. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION
 - 2. THIS PRODUCT MEES EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008
 - 3. THE LEAD FREE PLATING FOR -002LF WILL BE TERMINAL BODY: 1/2 HARD BRASS W/PURE TIN PLATING TERMINAL SPRING: .0048/.122 THK THREAD Be-Cu w/PURE TIN


spec ref				dr		Yong Huang		2010/10/27		projection		INCH / MM		size		A3		scale		10:1																																					
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Zheng-Kun Hu		2015/03/04						ecn no		ELX-N-19865-1																																							
						chr		-																																																	
						appr		Tim Yao		2015/03/11																																															
										product family												MNI - JUMP												rel level												Released											
surface 3.2		linear		0.X		±0.3				title		.125/3.18 C.C.										dwg no		76113										rev		F																					
				0.XX		±0.13																																																			
				0.XXX		±0.013																																																			
		angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw										sheet 1 of 2																																	

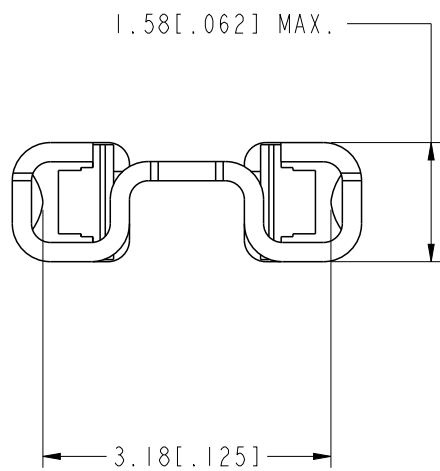


DISTANCE BETWEEN GOLD
DOTS WHEN APPLICABLE

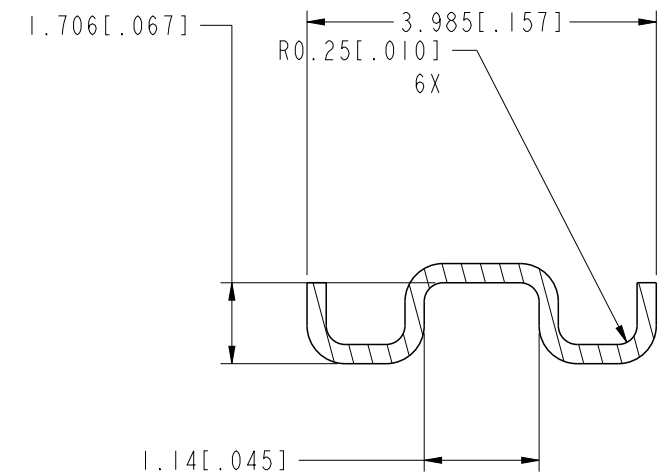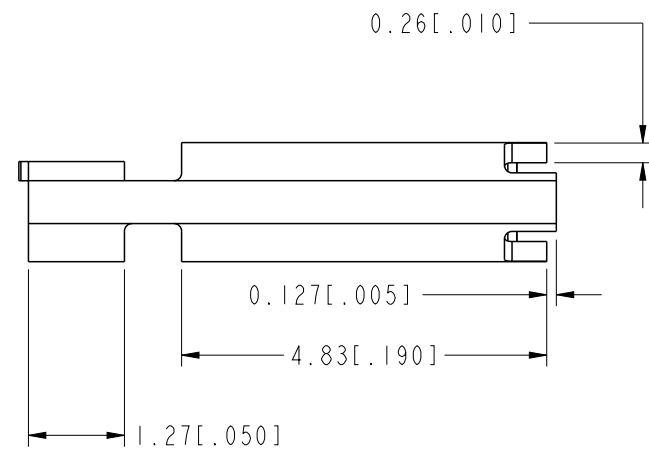

SECTION A-A

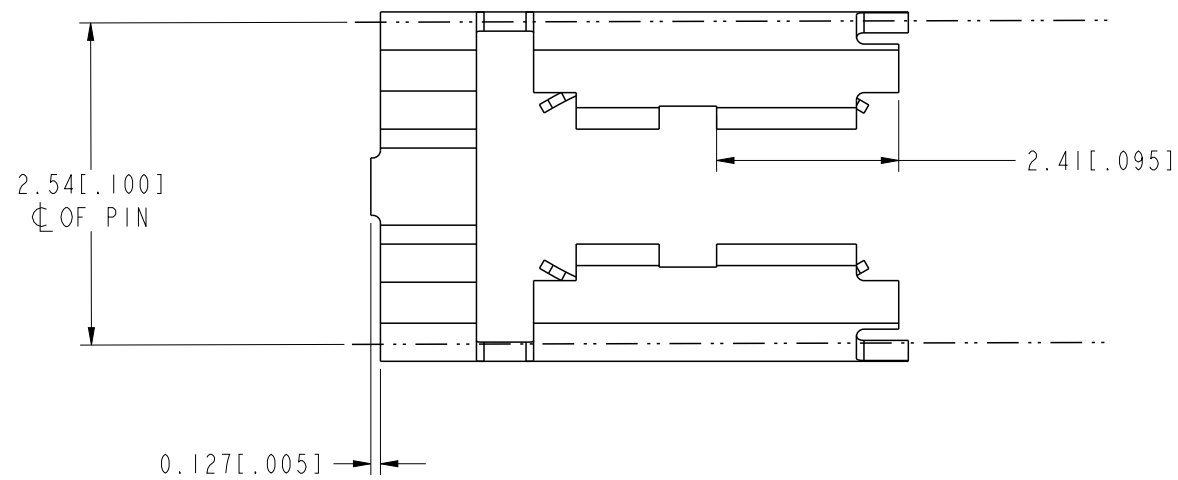

spec ref				dr	Yong Huang	2010/10/27	projection 	INCH/MM 	size	A3	scale	10:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Zheng-Kun Hu	2015/03/04			ecn no	ELX-N-19865-1		
				chr	-	-						
				appr	Tim Yao	2015/03/11						
surface 	linear	0.X	±0.3		title .125/3.18 C.C. JUMPER				dwg no	76113		rev F
		0.XX	±0.13									
		0.XXX	±0.013									
		angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw				sheet 2 of 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[90518-202LF](#) [76113-101](#) [90518-202](#) [76113-102](#)