



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E		REVISED PER ECO-14-005095	21APR2014	AP	RP
F		REVISED PER ECO-16-008845	27SEP2016	AP	RP
G		REVISED PER ECO-17-013036	13SEP2017	AP	RP


- 1 REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 2 MATERIAL:
SHIELD - PHOSPHOR BRONZE
CONTACT - COPPER-NICKEL-SILICON
HOUSING, CHICKLET AND CHICKLET COVER - GLASS FILLED POLYESTER, UL 94V-0.
- 3 FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 µm MIN BRIGHT TIN-LEAD OVER BASE PLATING
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- 5 DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

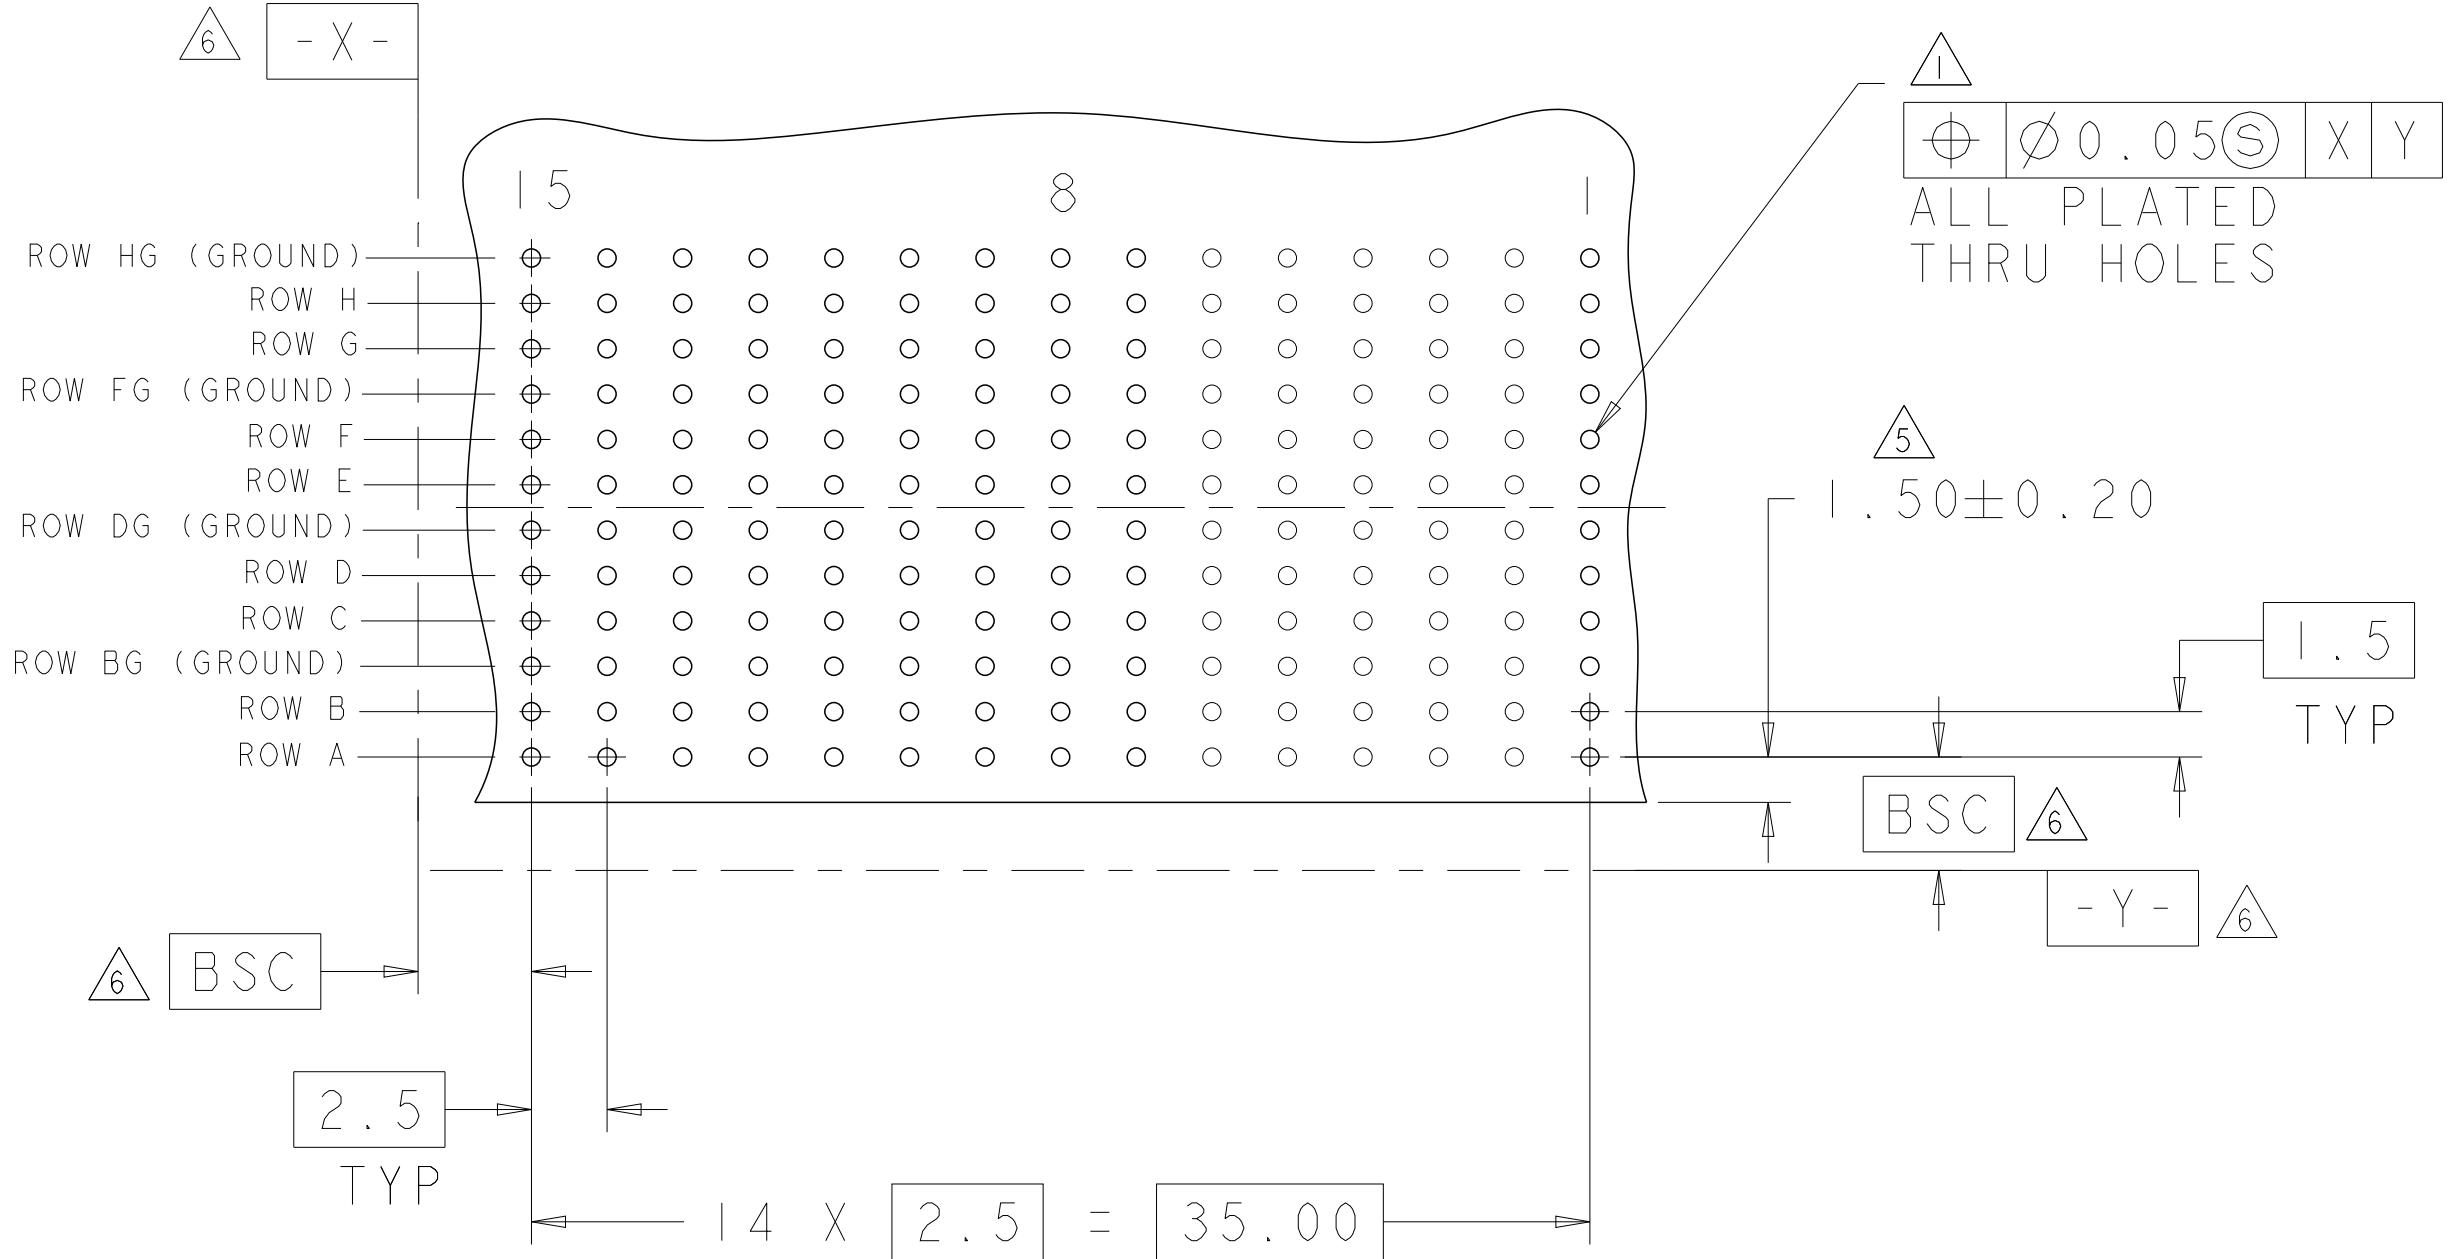

RECOMMENDED PC BOARD LAYOUT,
DAUGHTER BOARD,
COMPONENT SIDE SHOWN
SCALE 4:1

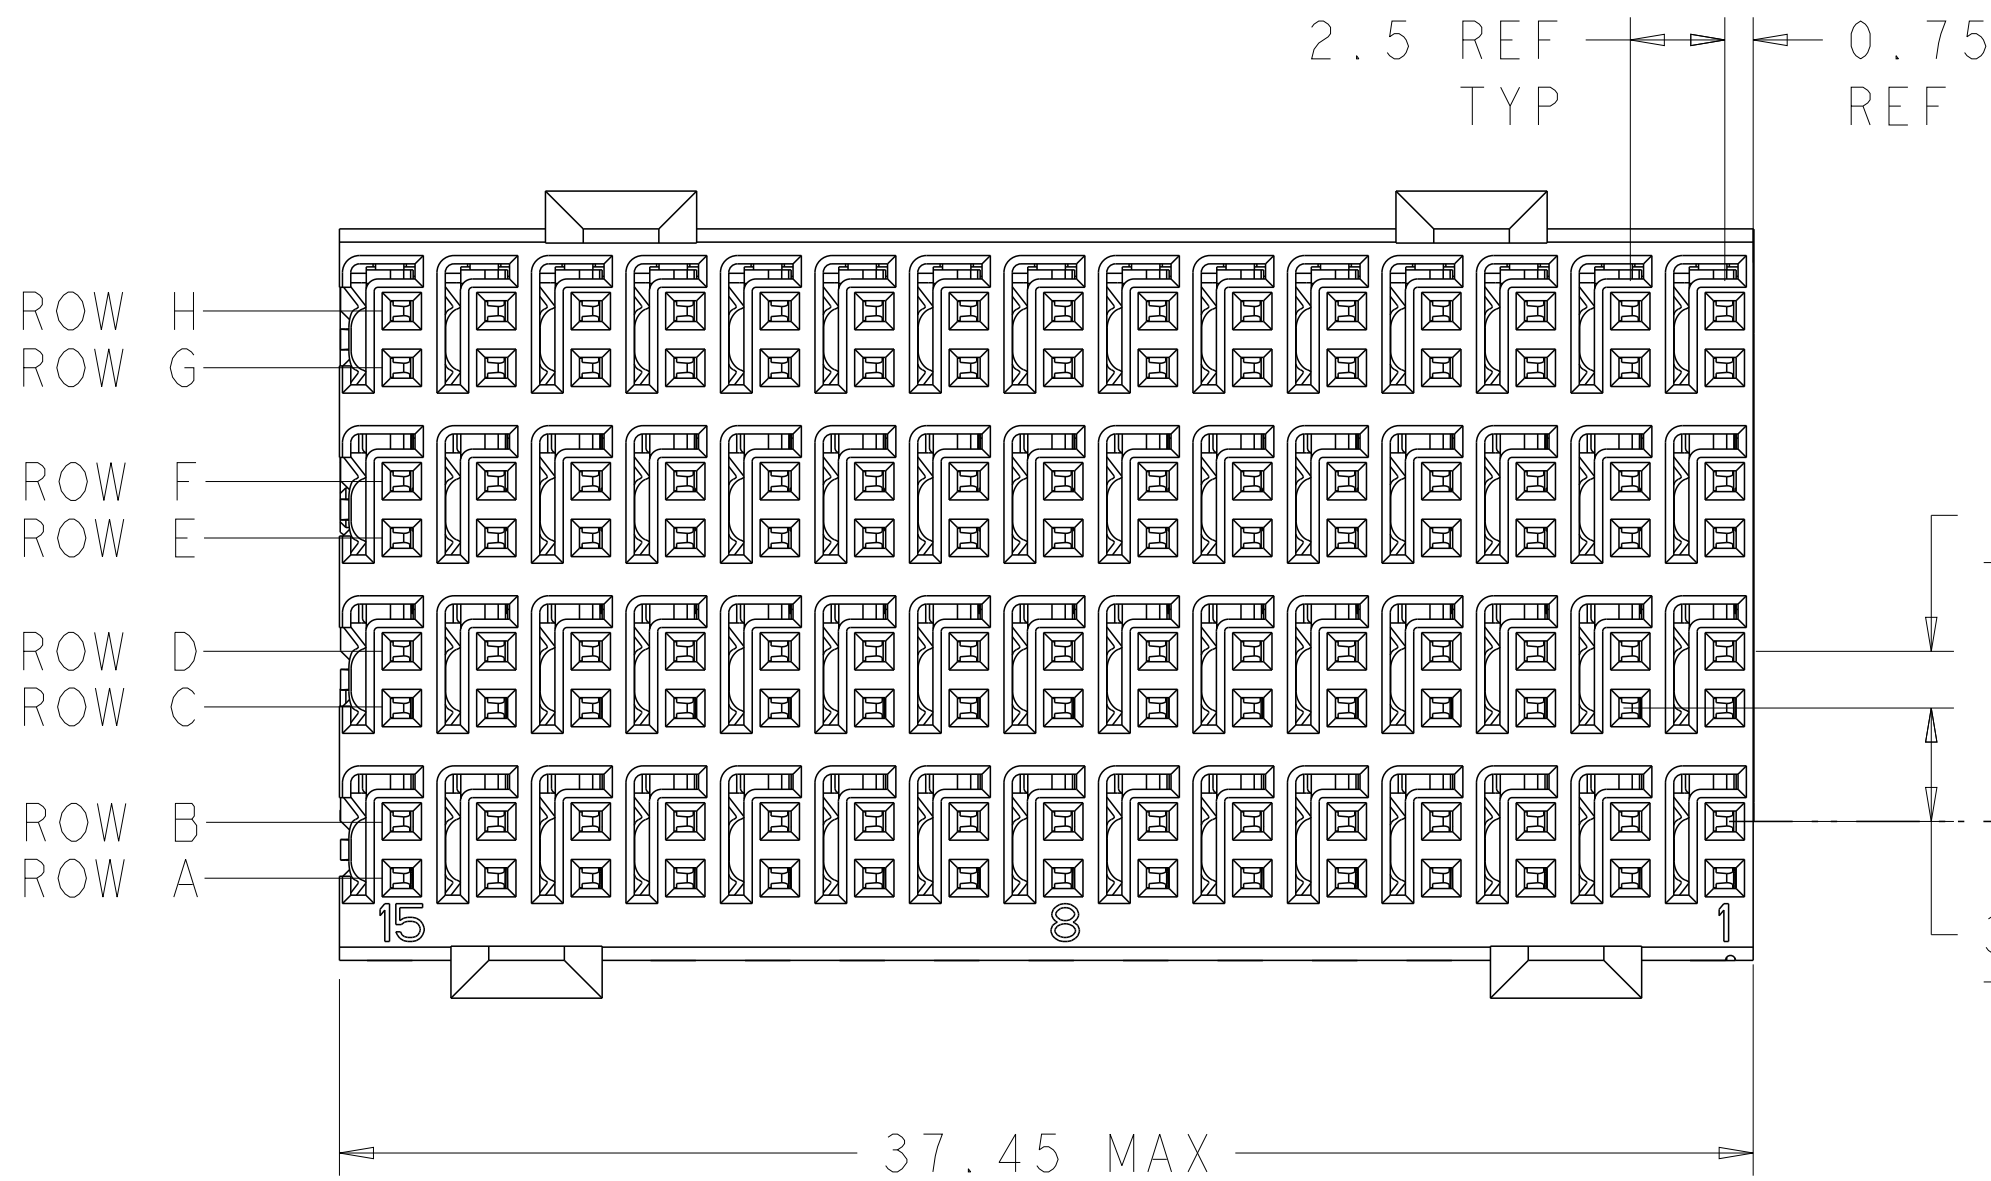

TOP SURFACE OF
DAUGHTER CARD

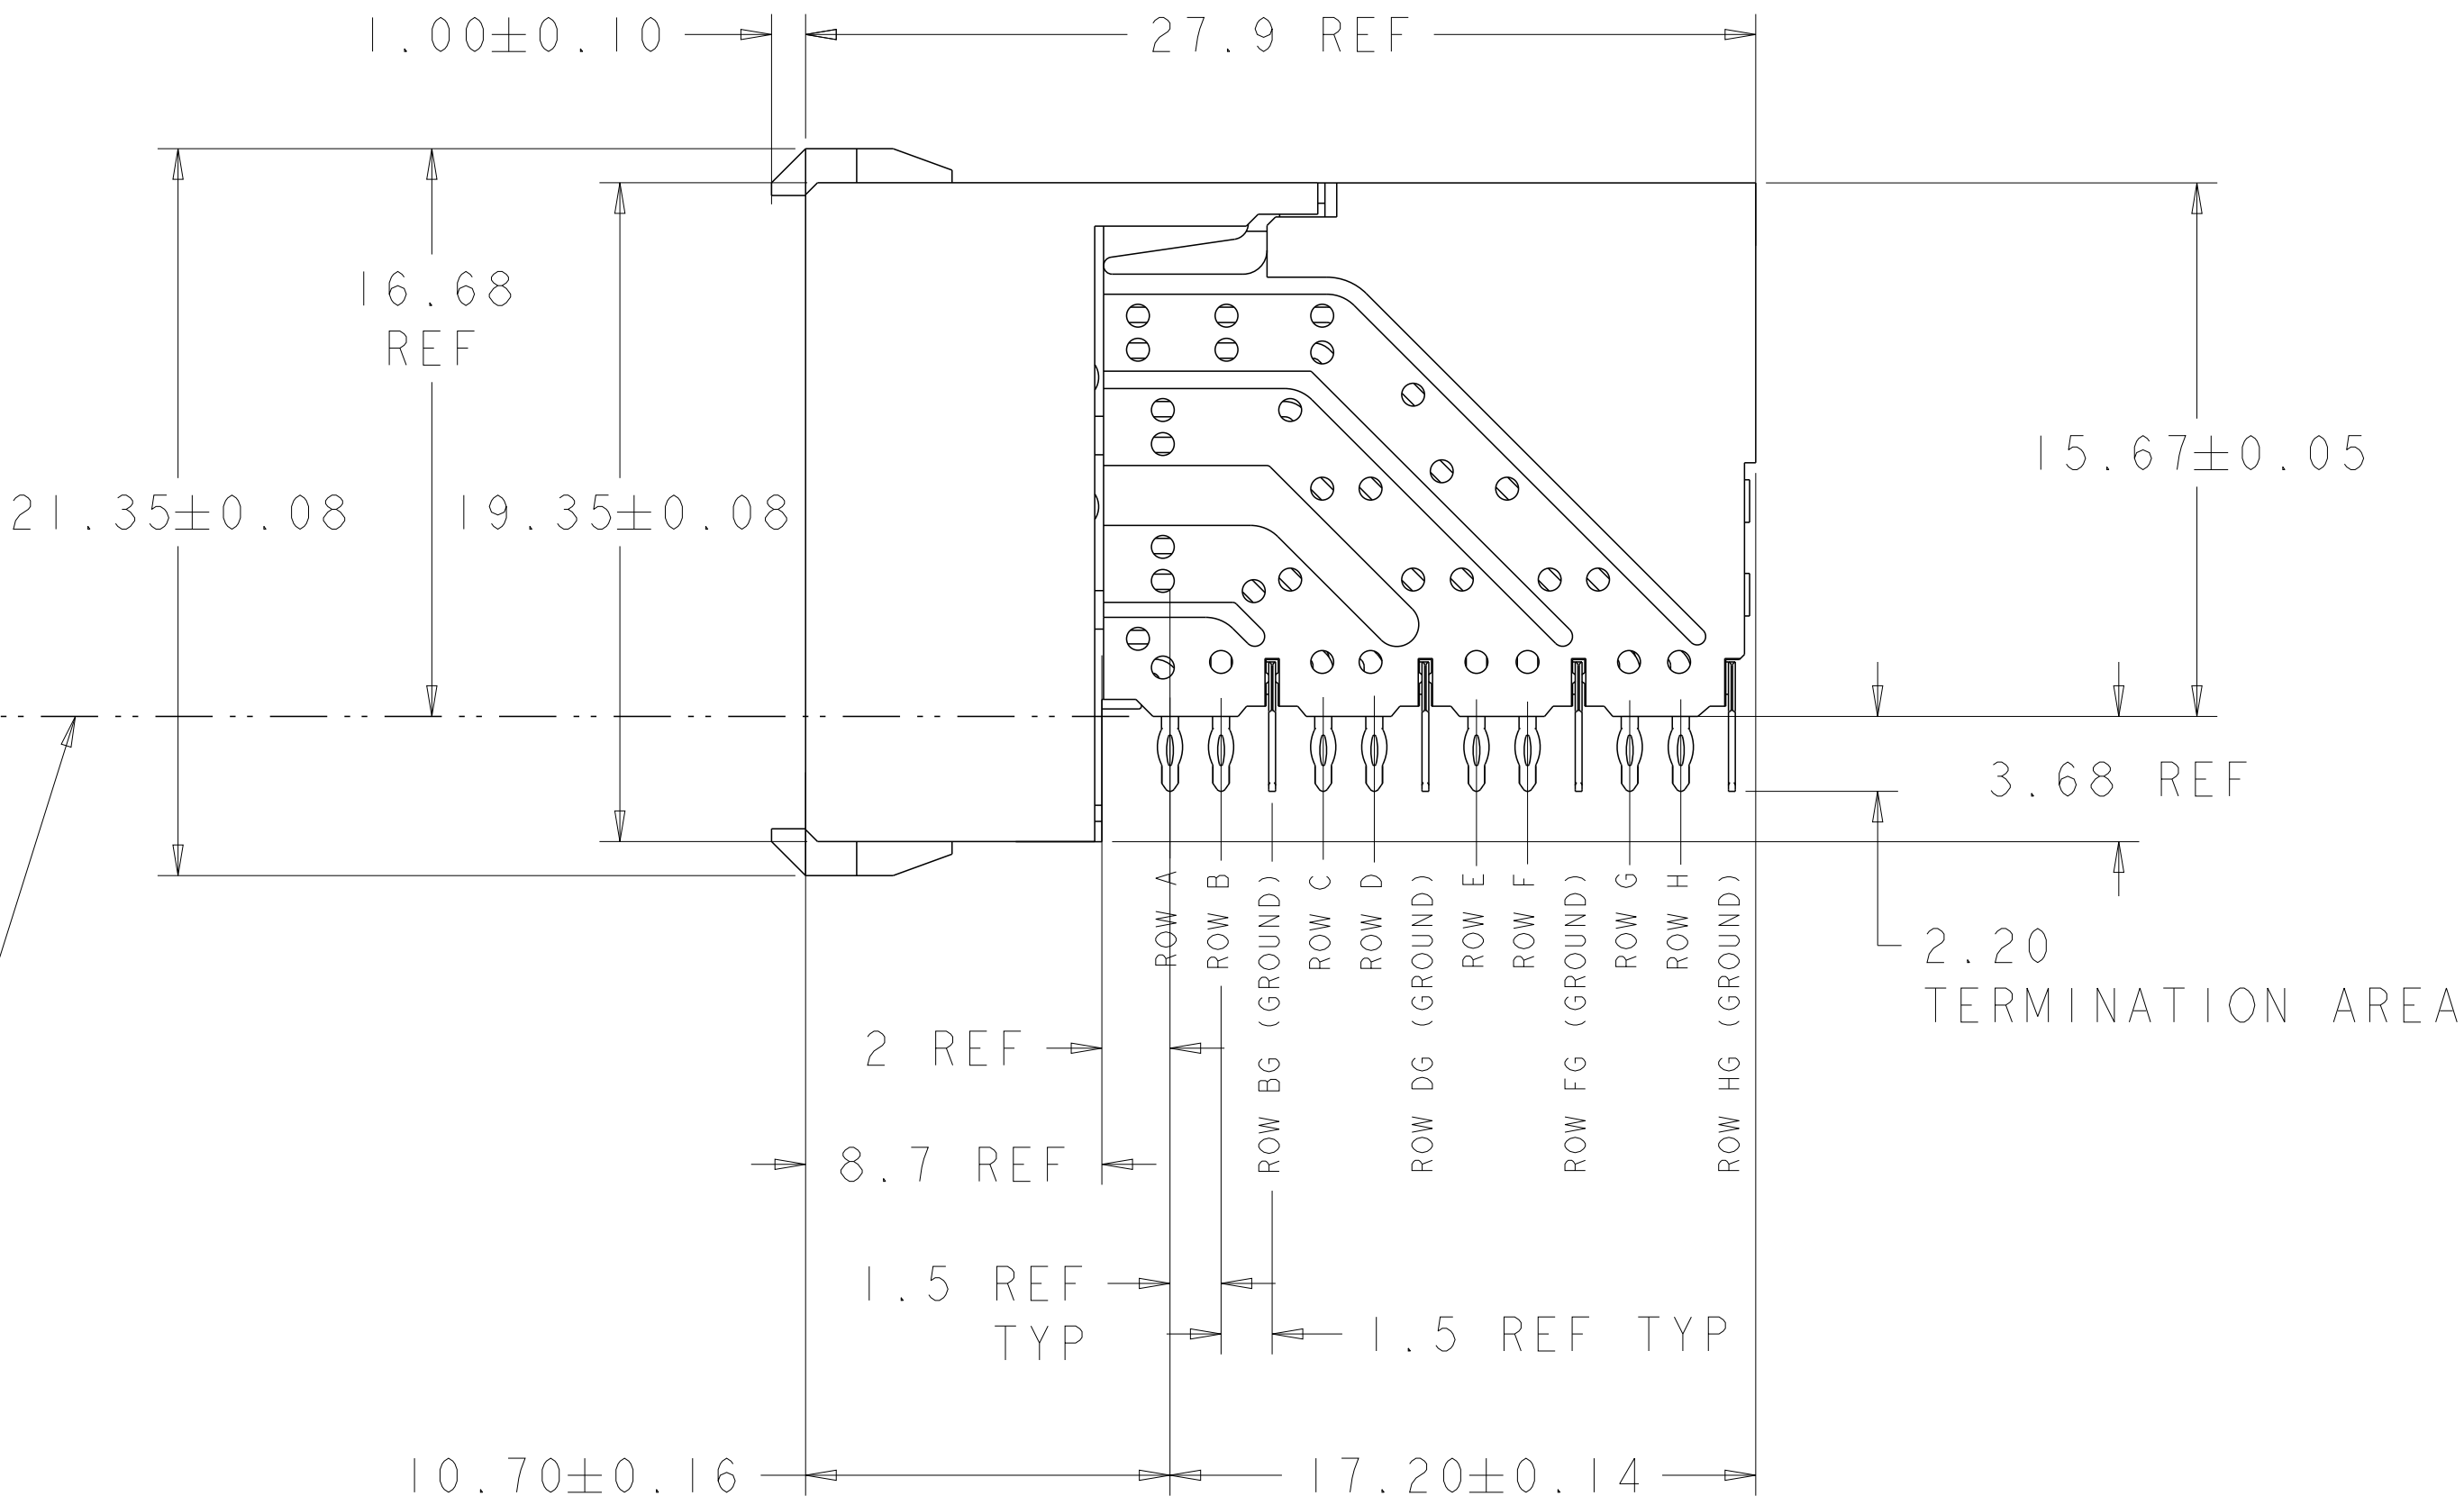

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. J. MAGARO 25MAR2003	TE Connectivity	
DIMENSIONS:		CHK R. A. PATTERSON 25MAR2003		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD R. A. PATTERSON 19MAY2003	NAME RECEPTACLE ASSEMBLY, 4 PAIR, 37.5mm HMZd	
	0 PLC	PRODUCT SPEC	SIZE	
	1 PLC	APPLICATION SPEC	CAGE CODE	
	2 PLC	WEIGHT	DRAWING NO	
	3 PLC		RESTRICTED TO	
	4 PLC		A100779C=1469294	
ANGLES	ANGLES		SCALE	
FINISH	FINISH		5:1	
MATERIAL			SHEET	
			1 OF 1	
			REV	
			G	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1469294-1](#)