

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2000

© COPYRIGHT 2000

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

GW

-

P

LTR

DESCRIPTION

DATE

DWN

APVD


A1

SR10-0138-01



5APR2001

CM

KM

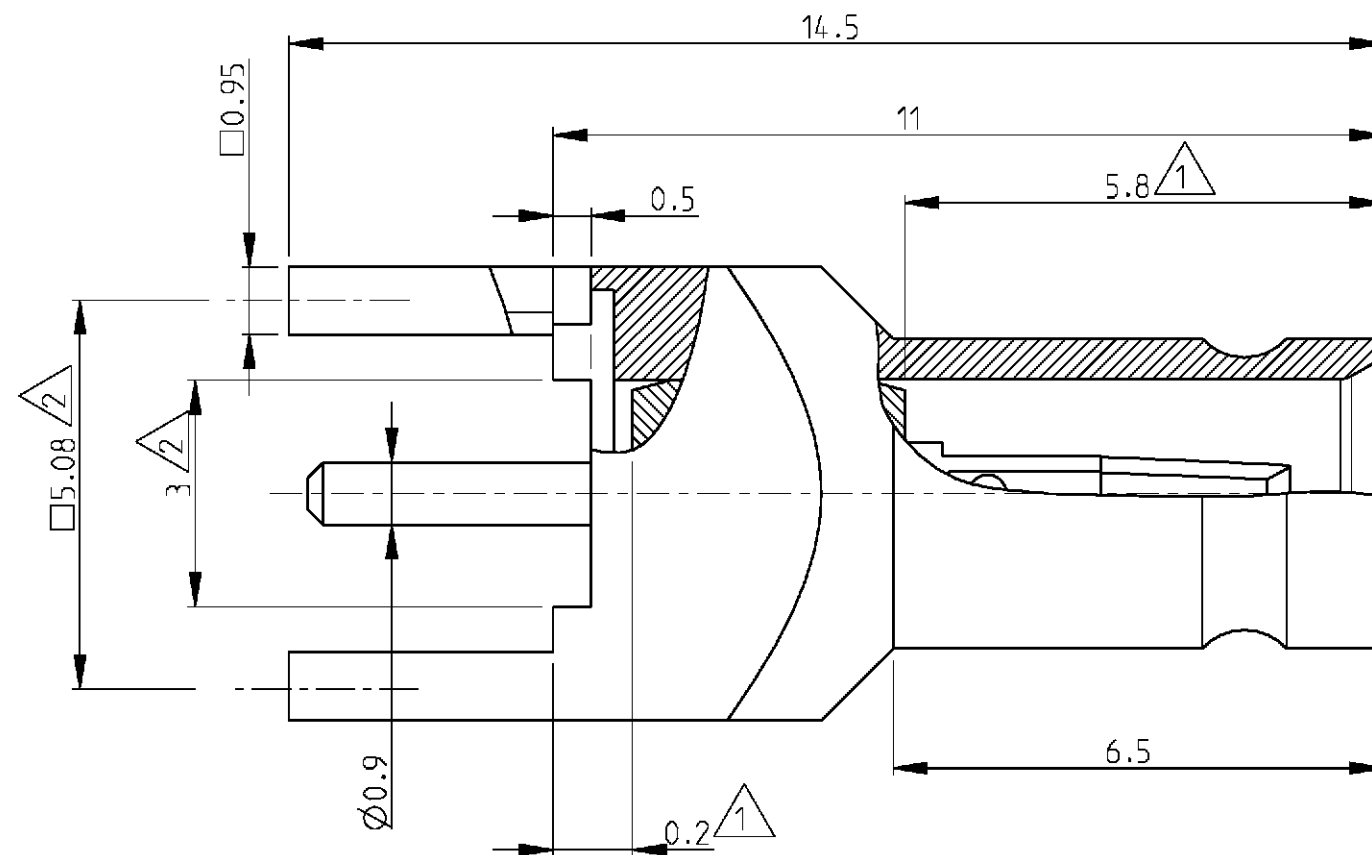

Recommended
PCB Layout
Pitch : 2.54

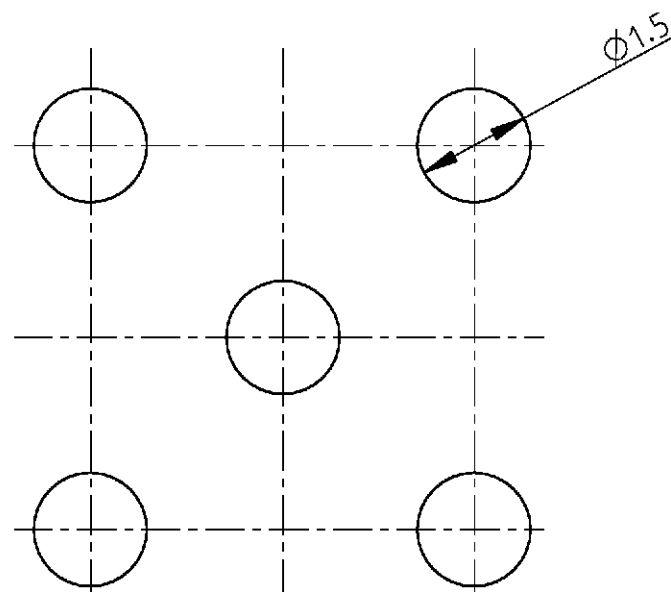

2:1

4. Mating face according to DIN 47297 and CECC 22230

3. Mounting requirements : PCB with pitch 2.54 (indicated by a triangle with '2')
Thickness : ± 3 mm
Diameter of bores : $\varnothing 1.5$ mm (indicated by a triangle with '2')

(indicated by a triangle with '2') Nominal dimension


(indicated by a triangle with '1') Minimum dimension

All dimensions are maximum unless otherwise specified

V23600-A1027-C1	3-1393670-4	Dielectric	PTFE	
		Outer Con.	Brass	1 μ m Au min in contact area
		Center Con.	Cu Be	1 μ m Au min in contact area
Old Nr	Tyco Nr	Description	Material	Plating

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	± 0.5
1 PLC	± 0.13
2 PLC	± 0.013
3 PLC	± 0.0001
4 PLC	± 0.0001
ANGLES	$\pm$
MATERIAL	FINISH



1:1

DWN MOROBE 15MAR2001

CHK MATTHEEUS 3APR2001

APVD BOZZER 5APR2001

PRODUCT SPEC

108-71032

APPLICATION SPEC

WEIGHT

-

tyco
ElectronicsTyco Electronics
Oostkamp - BelgiumNAME
BULKHEAD JACK
WITH PCB CONNECTION
1.0/2.3 50 Ohm

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 00779 C-3-1393670-4

SCALE 10/1 SHEET 1 OF 1 REV A1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1393670-4](#)