







- NOTES:
1. MATERIAL: (0.203±0.010)/.0080±.0004 THICK BRASS
 2. FINISH: P909 - OVERALL HOT TIN DIP: (0.00254)/.000100 MIN.
 3. PRODUCT SPEC: PS-10-07
 4. PACKAGING SPECIFICATION: LOOSE FORM TERMINALS: PER PK-2759-001
CHAIN FORM TERMINALS: PER PK-2759-002
 5. CRIMP IS FOR 22-30 GA WIRE WITH (.157)/.062 DIA INSULATION MAX.
 6. INSERTION FORCE OF TERMINAL INTO (2.54)/.100 CENTERLINE CONNECTOR IS 2.5 LBS. MAX
 7. TERMINAL RETENTION IN HOUSING IS 26.7N / 6 LBS MIN. WHEN PULLED AT THE RATE OF 25.4MM / 1 INCH PER MINUTE.
 8. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
 9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

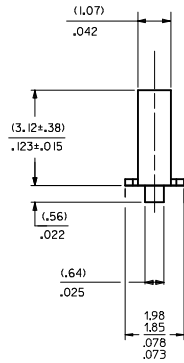


2759-(***)*	
PART NUMBER	ENGINEERING NUMBER
50-29-1638	2759-(P909)IL
50-29-1757	2759-(P909)IB

WINDING DETAIL "A"

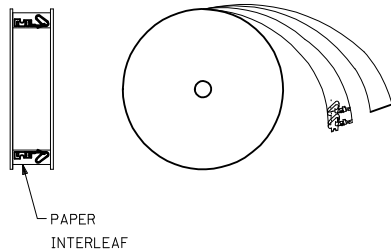

WINDING DETAIL "B"

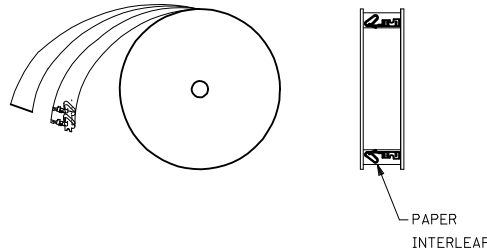

2759-(***)*

FORM

L=LOOSE

A=CHAIN, PER WINDING DETAIL 'A'

B=CHAIN, PER WINDING DETAIL 'B'

PLATING

SEE NOTE 2

ADD WINDING DETAIL		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: UCP2014-4131	2014/04/08	▽=0	4 PLACES ±	mm	INCH	MM/IN	DATE	---	---	INCH	---	---	---
DRWN:KIPER	2014/04/08	▽=0	3 PLACES ±	±.010	±.010	JJS	07/29/04	---	---	---	---	---	---
CHKD:NGUYEN	2014/04/08	▽=0	2 PLACES ±	±.025	±.014	KSS	07/29/04	---	---	---	---	---	---
APPR:FSM TH	2014/04/21	▽=0	1 PLACE ±	±.036	±.014	YM	07/29/04	---	---	---	---	---	---
REV	DESCRIPTION	ANGULAR ±1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		1 OF 1	
E2		SEE CHART		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SD-2759-001			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[50-29-1757](#)