


Model 4911A Retractable Sheath Banana Plug Each End Patch Cord

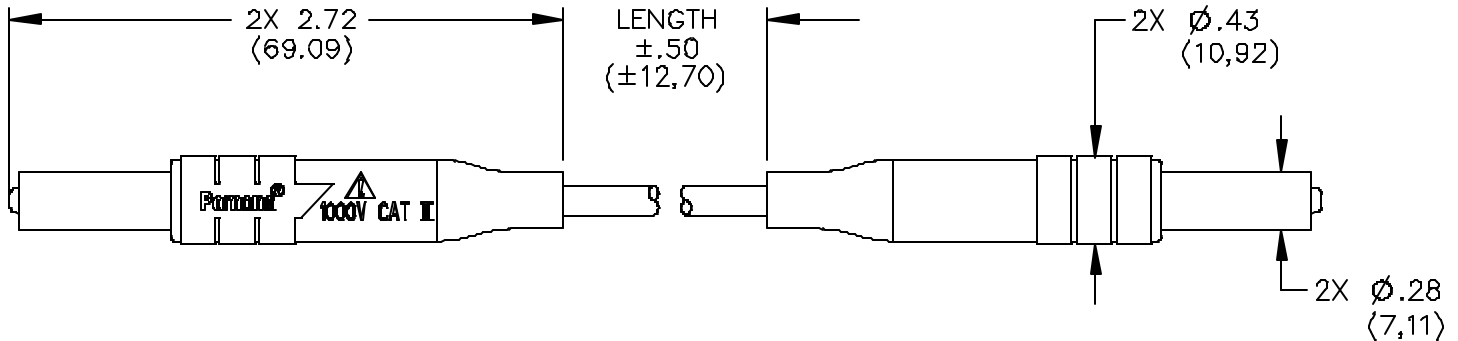

MATERIALS:

Retractable Sheath Banana Plug:

Plug Body: Brass, Nickel Plated

Banana Spring: Beryllium Copper, Nickel Plated

Compression Spring: Stainless Steel

Tip: Nylon, Color Matches Color of Wire

Insulation: Nylon Molded to the Plug and Wire. Color Matches Color of Wire.

Wire: 18 AWG, Stranding 65 x 36 t.c., PVC Insulated, .144 (3,66mm) O.D.

Marking: "POMONA 4911A-XX-*".

RATINGS:

Operating Temperature: +55° C (+131° F) Max.

Operating Voltage: 1000 Volts AC/DC Max.

Current: 10 Amperes

ORDERING INFORMATION: Model 4911A-XX-*

XX = Wire Length, Standard Lengths: 4" (10,16cm), 8" (20,32cm), 12" (30,48cm), 24" (60,96cm), 36" (91,44cm), 48" (121,92cm) & 60" (152,4cm). Additional lengths can be quoted upon request.

* = Color, -0 Black, -2 Red

Ordering Example: 4911A-12-2 Patch Cord is 12" (30,48cm), Color is Red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Pomona®

Model 4911A Retractable Sheath Banana Plug Each End Patch Cord

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

6/9/99

SY/EH/LS

C:\Laura Goldberg\FlukeDataSheet\4911A_1_01.doc

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

PomonaACCESS 90608 (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com

Page 2 of 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[4911A-36-0](#) [4911A-36-2](#) [4911A-60-0](#) [4911A-60-2](#) [4911A-24-0](#) [4911A-24-2](#) [4911A-12-2](#) [4911A-12-0](#) [4911A-48-0](#)
[4911A-48-2](#)