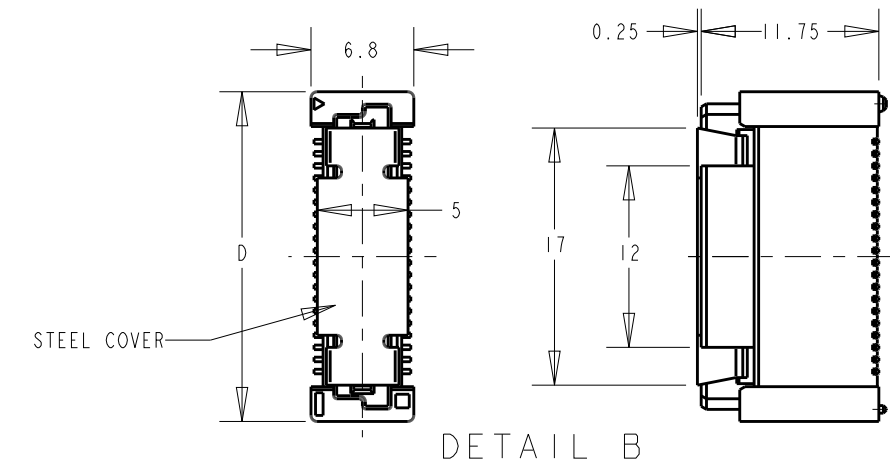
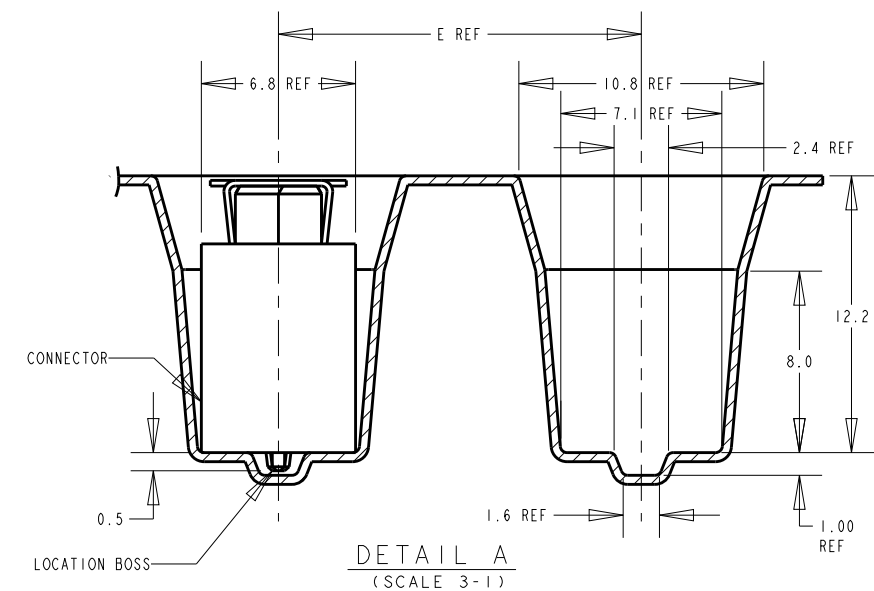
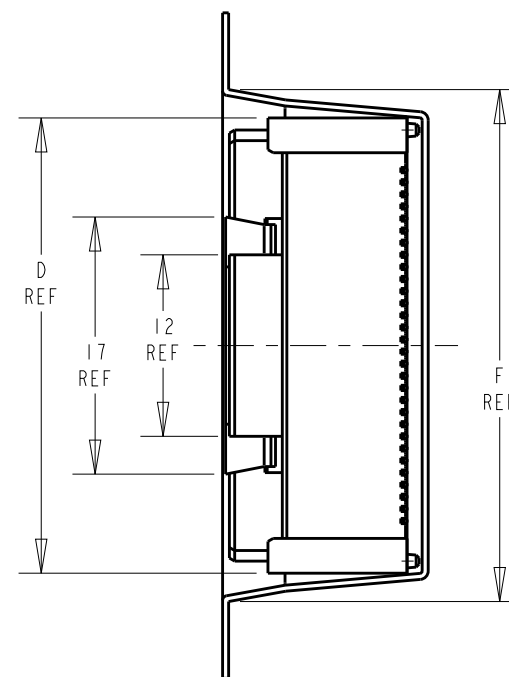


AVAILABLE	200	81.8	16	77.8	104	100.4	50.2	180	0-5084618-9
	200	73.8	16	69.8	88	84.4	42.2	160	0-5084618-8
	200	65.8	16	61.8	88	84.4	42.2	140	0-5084618-6
	200	57.8	16	53.8	72	68.4	34.2	120	0-5084618-5
	200	49.8	16	45.8	72	68.4	34.2	100	0-5084618-4
	200	41.8	16	37.8	56	52.4	26.2	80	0-5084618-3
	200	33.8	16	29.8	44	40.4	20.2	60	0-5084618-2
	200	25.8	16	21.8	44	40.4	20.2	40	0-5084618-1
REMARKS	QTY	F	E	D	C	B	A	POS	PART NO.

CUSTOMER DRAWING

ANGLES
FINISH

CUSTOMER DRAWING

SCALE 2.1

SHEET	1	OF	2	REV	A
-------	---	----	---	-----	---

NOTES;

1. MATERIAL: HOUSING: L.C.P. (HIGH TEMP. THERMOPLASTIC)
UL 94V-0, NATURAL.
CONTACT: BERYLIUM COPPER.
2. FINISH: CONTACT AREA: 0.00076 MIN GOLD ON
0.0013 MIN ALL OVER NICKEL.
SOLDERING AREA: 0.002 MIN MATTE-TIN
3. POSITION SERIES: SEE TABLE. (SHEET 2)
4. CONN STACK HEIGHT COMBINE OF PLUG "Y" H VS REC "X" H.
STACK HEIGHT = Y + X - 5
5. FOR STEEL COVER PICK AND PLACE VERSION,
DESCRIPTION PRINTING ON TUBE IS:
"REC ASS'Y (H=13mm), W/ STEEL COVER,
0.8mm BTB STACKING CONN"

76.20	77.80	71.20	180	0 -	- 9
68.20	69.80	63.20	160	0 -	- 8
60.20	61.80	55.20	140	0 -	- 6
52.20	53.80	47.20	120	0 -	- 5
44.20	45.80	39.20	100	0 -	- 4
36.20	37.80	31.20	80	0 -	- 3
28.20	29.80	23.20	60	0 -	- 2
20.20	21.80	15.20	40	0-5084618-1	
C	B	A	POS.	PART N ^o .	

RECOMMENDED P.C. BOARD LAYOUT

Ⓐ ADD CONNECTOR INFORMATION SHEET

CUSTOMER DRAWING

NAME	RECEPTACLE ASS'Y 13H TYPE 30Au (0.5 BOSS LENGTH) FOR FH 0.8mm B-T-B CONN. ON TAPING
------	---

C-5084618

SCALE 0

SHEET	OF
-------	----

REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5084618-9](#)