

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



D-SUB adapter plate, for one D-SUB connector, no. of positions 50, housing series HC-B 16...

The illustration shows version HC-B 16-ADP/1 DSUB 37

Product Description

incl. mounting screws



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	2 pc
GTIN	4 017918 038137
Weight per Piece (excluding packing)	17.37 g
Custom tariff number	85472000
Country of origin	Germany

Technical data

Dimensions

Length	85 mm
Height	34.5 mm
Hole diameter	3.2 mm
Drill hole distance, horizontal	77.5 mm
Drill hole distance, vertical	27 mm

General

Note	For housing HC-B16
Material	PA



Technical data

General

Flammability rating according to UL 94	НВ
Color	gray
Number of positions	50
Туре	B16

Standards and Regulations

Flammability rating according to UL 94	НВ

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440201

ETIM

ETIM 3.0	EC002309
ETIM 4.0	EC002309
ETIM 5.0	EC002309

UNSPSC

UNSPSC 6.01	30211808
UNSPSC 7.0901	39121408
UNSPSC 11	39121408
UNSPSC 12.01	39121408
UNSPSC 13.2	39121408

Approvals

Approvals

Approvals

EAC



Approvals

Ex Approvals

Approvals submitted

Approval details


EAC

Drawings

85 77,5 Ø 3,2

See assembly instruction



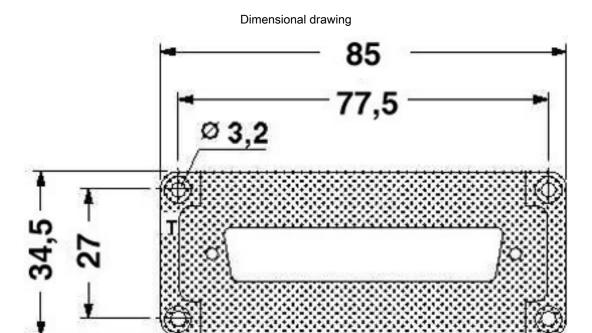

See assembly instruction

Phoenix Contact 2016 © - all rights reserved http://www.phoenixcontact.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact: 1775538