


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H2	REVISED PER ECR-17-013215	18SEP17	J.Z	D.Z

- 1 0.00381 MIN BRIGHT TIN LEAD PLATING ALL OVER.
- 2 REED STRAIGHT TOOTH KNURL CS 80-80 T.P.I.,
125 TEETH, 70° INCLUDED ANGLE. FITS 1.50 - 1.57
DIAMETER HOLE IN A 3.18 PRINTED CIRCUIT BOARD.
3. PARTS TO COMPLY WITH AMP SOLDERABILITY
SPECIFICATION 109-11-3.
- 4 MATES WITH AMP PARTS 60354 AND 60598.
- 5 0.00381 MIN BRIGHT TIN PLATING ALL OVER.

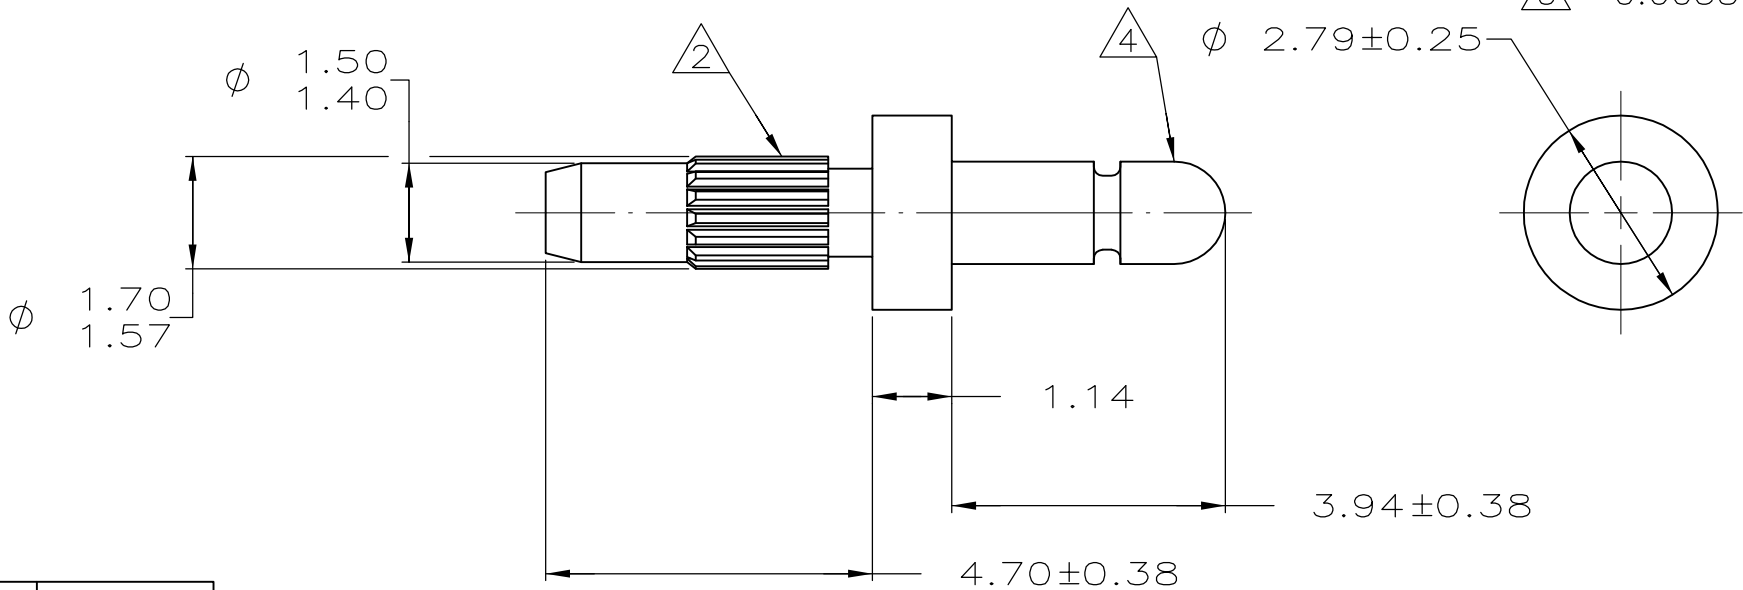

—	—
4.70	.185
3.94	.155
3.18	.125
2.79	.110
1.70	.067
1.57	.062
1.50	.059
1.47	.058
1.40	.055
1.14	.045
0.38	.015
0.25	.010
0.13	.005
0.00381	.000150
MM	IN
CONVERSION TABLE	

5	3-60753-2
5	60753-2
FINISH	PART NUMBER

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 12JUL2006	TE Connectivity		
		CHK D. BOSSI 12JUL2006			
		APVD D. BOSSI 12JUL2006	NAME PIN, .058 DIAMETER, BRASS, KNURLED, P.C. CONTACT		
DIMENSIONS: mm		PRODUCT SPEC 108-1025			
		APPLICATION SPEC 114-1008			
		WEIGHT 0.000000	SIZE A3	CAGE CODE 00779	DRAWING NO C-60753
MATERIAL BRASS		FINISH SEE TABLE	RESTRICTED TO —		
		CUSTOMER DRAWING		SCALE 10:1	SHEET 1 OF 1
				REV H2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[60753-2](#)