

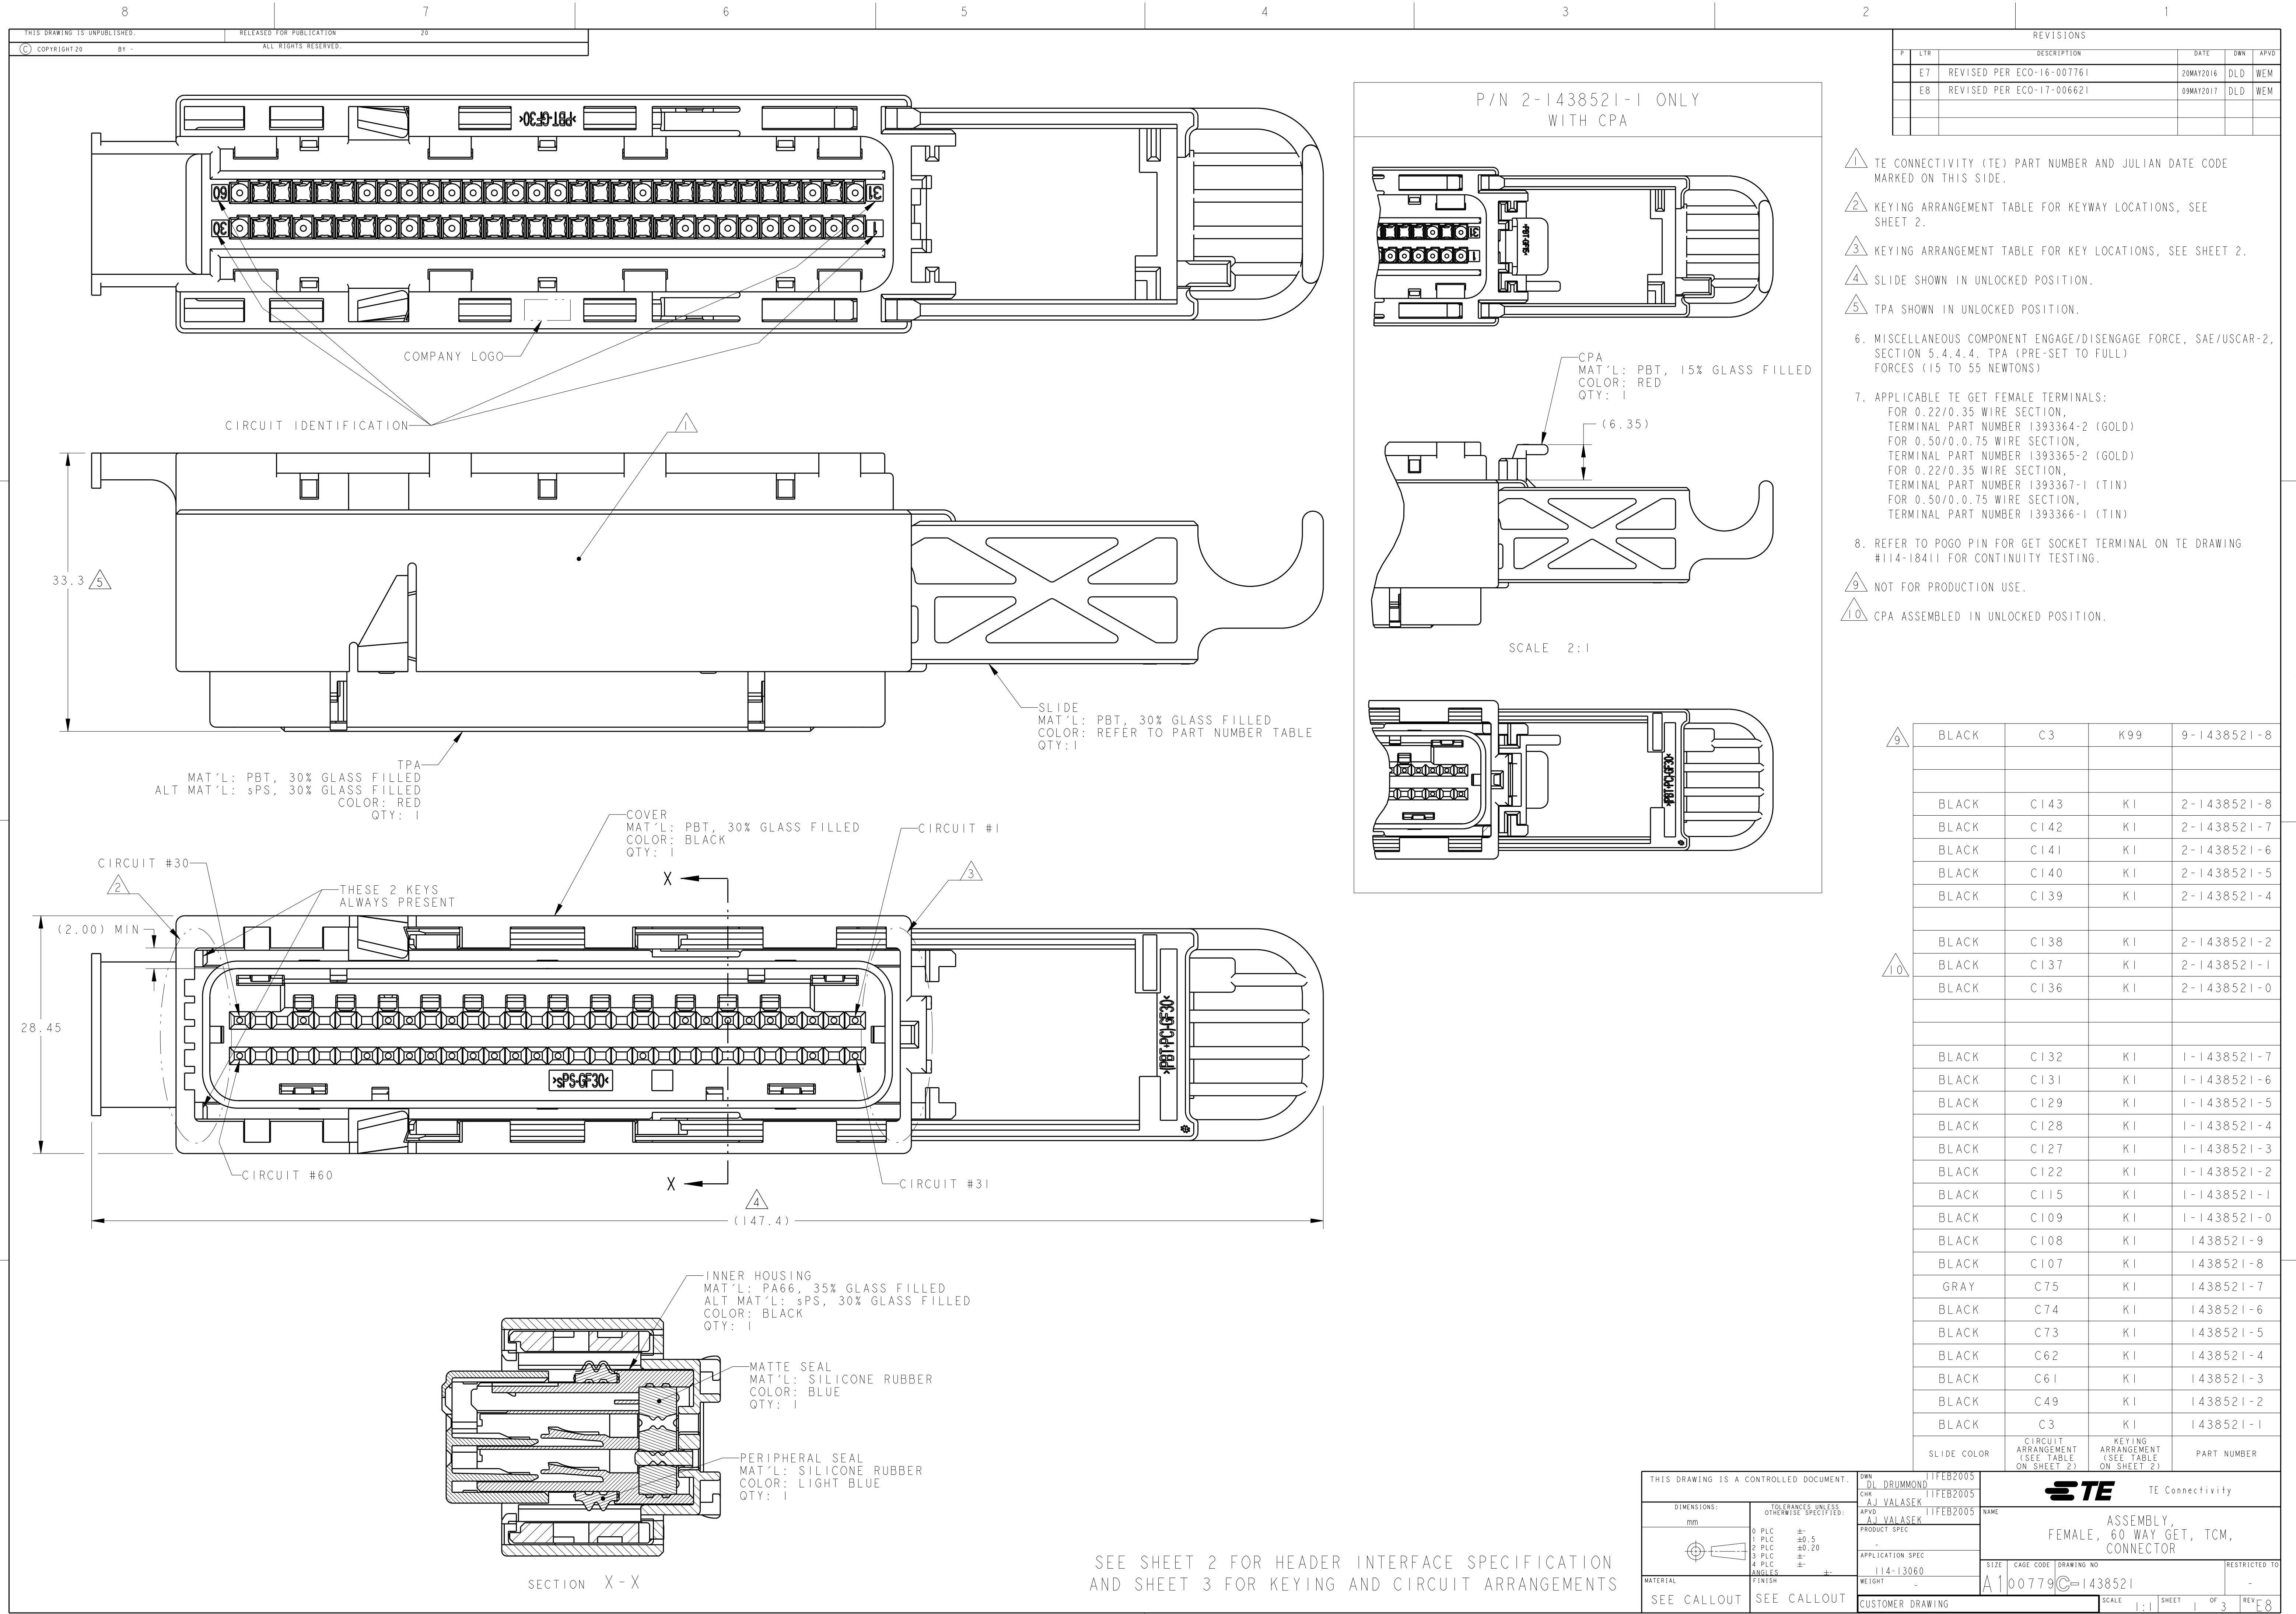
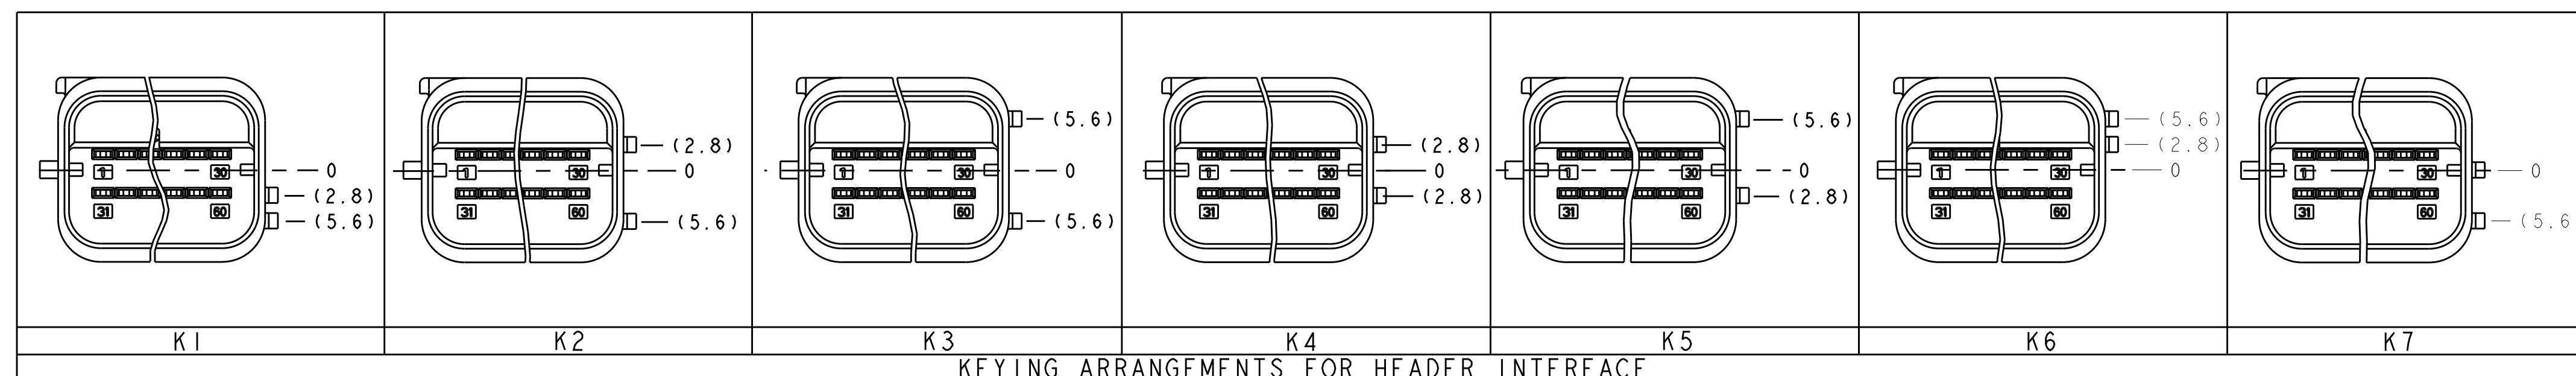


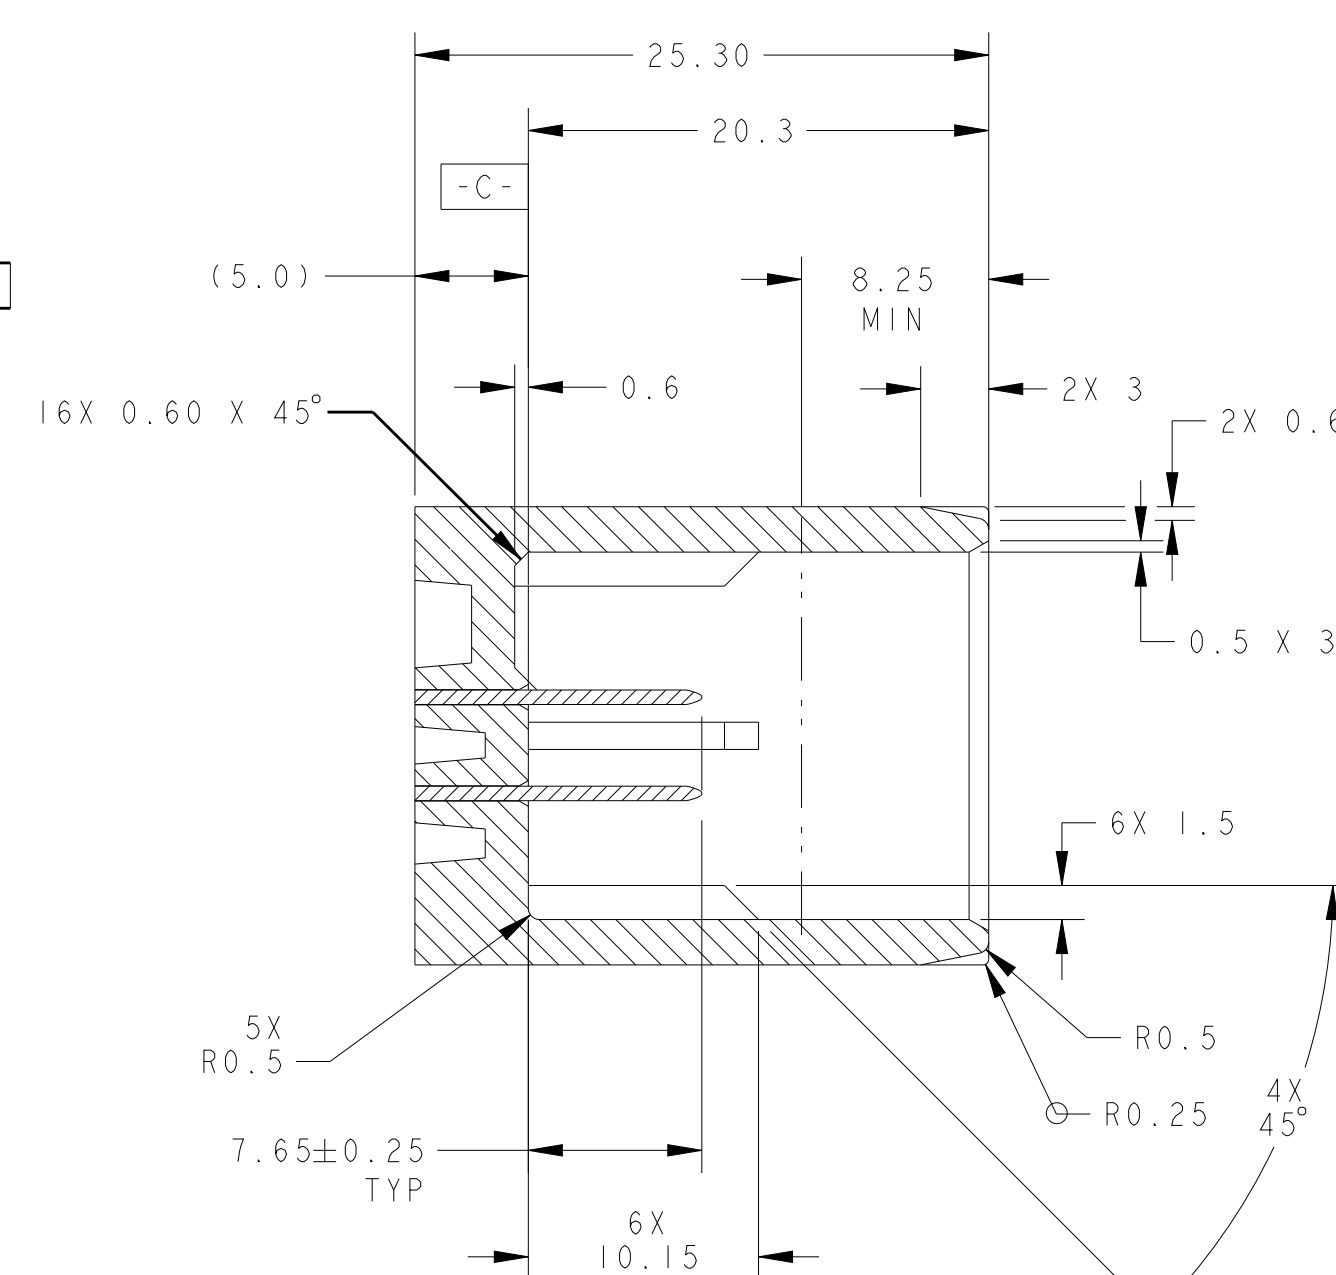

1. PART MUST CONFORM TO THE LATEST LEVEL OF USCAR DATED 9510.10.
2. ALL PLASTIC PARTS MUST HAVE MATERIAL IDENTIFICATION SYMBOLS CLEARLY MARKED, WHEREVER PACKAGE SIZE PERMITS.
3. GENERAL TOLERANCES: ± 0.2 ALL ONE PLACE DIMENSIONS, ± 0.1 ALL TWO PLACE DIMENSIONS, $\pm 2^\circ$ ALL ANGULAR PLACE DIMENSIONS
4. ALL RADIUS ± 0.5 .
5. PIN PLATING DETAILS . . .
6. (SEALED INTERFACES ONLY) SEALING SURFACE MUST BE SMOOTH AND FREE OF PARTING LINES.
7. PARTS ARE TO BE FREE OF SCRATCHES, DISCOLORATION, SALT RESIDUE OR OTHER IMPERFECTIONS THAT MAY AFFECT FUNCTION OR FIT OF PART.
8. DRAFT ANGLE PERMISSIBLE ONLY WITHIN PRINT TOLERANCE.
9. SEALING SURFACE, NO WITNESS LINES OR DAMAGE PERMITTED.
10. VENT HOLE SIZE AND LOCATION OPTIONAL.
11. THIS AREA TO REMAIN CLEAR FOR HARNESS ASSEMBLY.
12. HOUSING MATERIAL SELECTION BASED ON PERFORMANCE REQUIRED FOR END APPLICATION AND SOLDERING PROCESS.
POLYESTER (PBT) - 30% GLASS TESTED TO USCAR2, REV 3, CLASS 2,
MAX. AMBIENT 100 DEGREE C.
13. CIRCUIT NUMBERS 1.0 HIGH CHARACTERS RAISED 0.05 - 0.1 IN A
0.10 TO 0.15 RECESSED AREA.

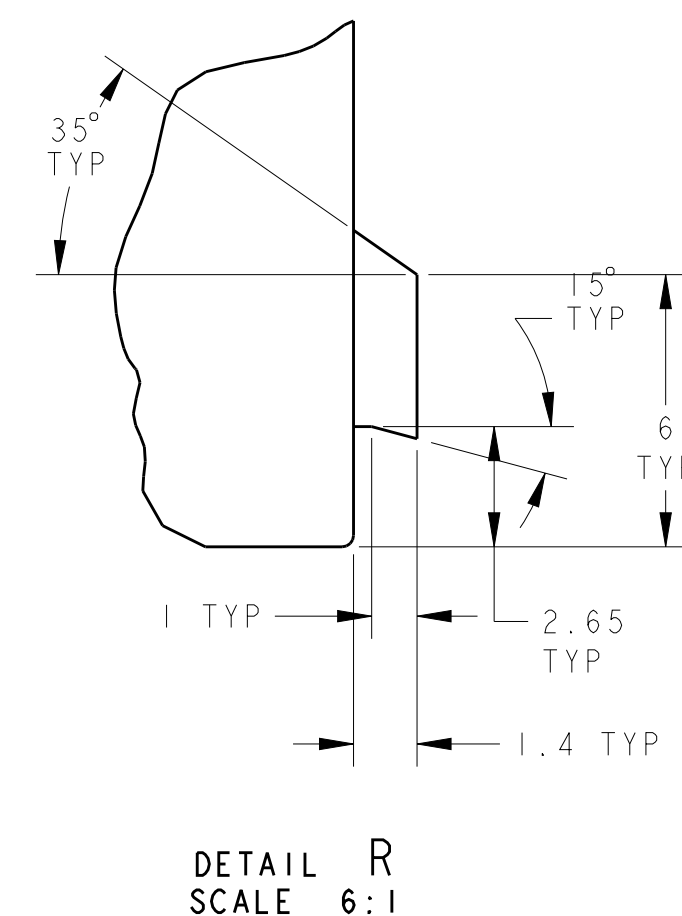

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JL DRUMMOND	TITFEB2005	 TE Connectivity
		CWH AJ VALASEK	TITFEB2005	
DIMENSIONS:		APRD AJ VALASEK	TITFEB2005	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
mm		PRODUCT SPEC		
		APPLICATION SPEC		
		ASSEMBLY, FEMALE, 60 WAY GET, TCM, CONNECTOR		
MATERIAL	FINISH	WEIGHT	SIZE CASE CODE DRAWING NO	RESTRICTED TO
-	-	-	A100779C-1438521	-
CUSTOMER DRAWING		SCALE	SHEET	OF
		1:1	2	3 REV#

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1438521-1](#)