

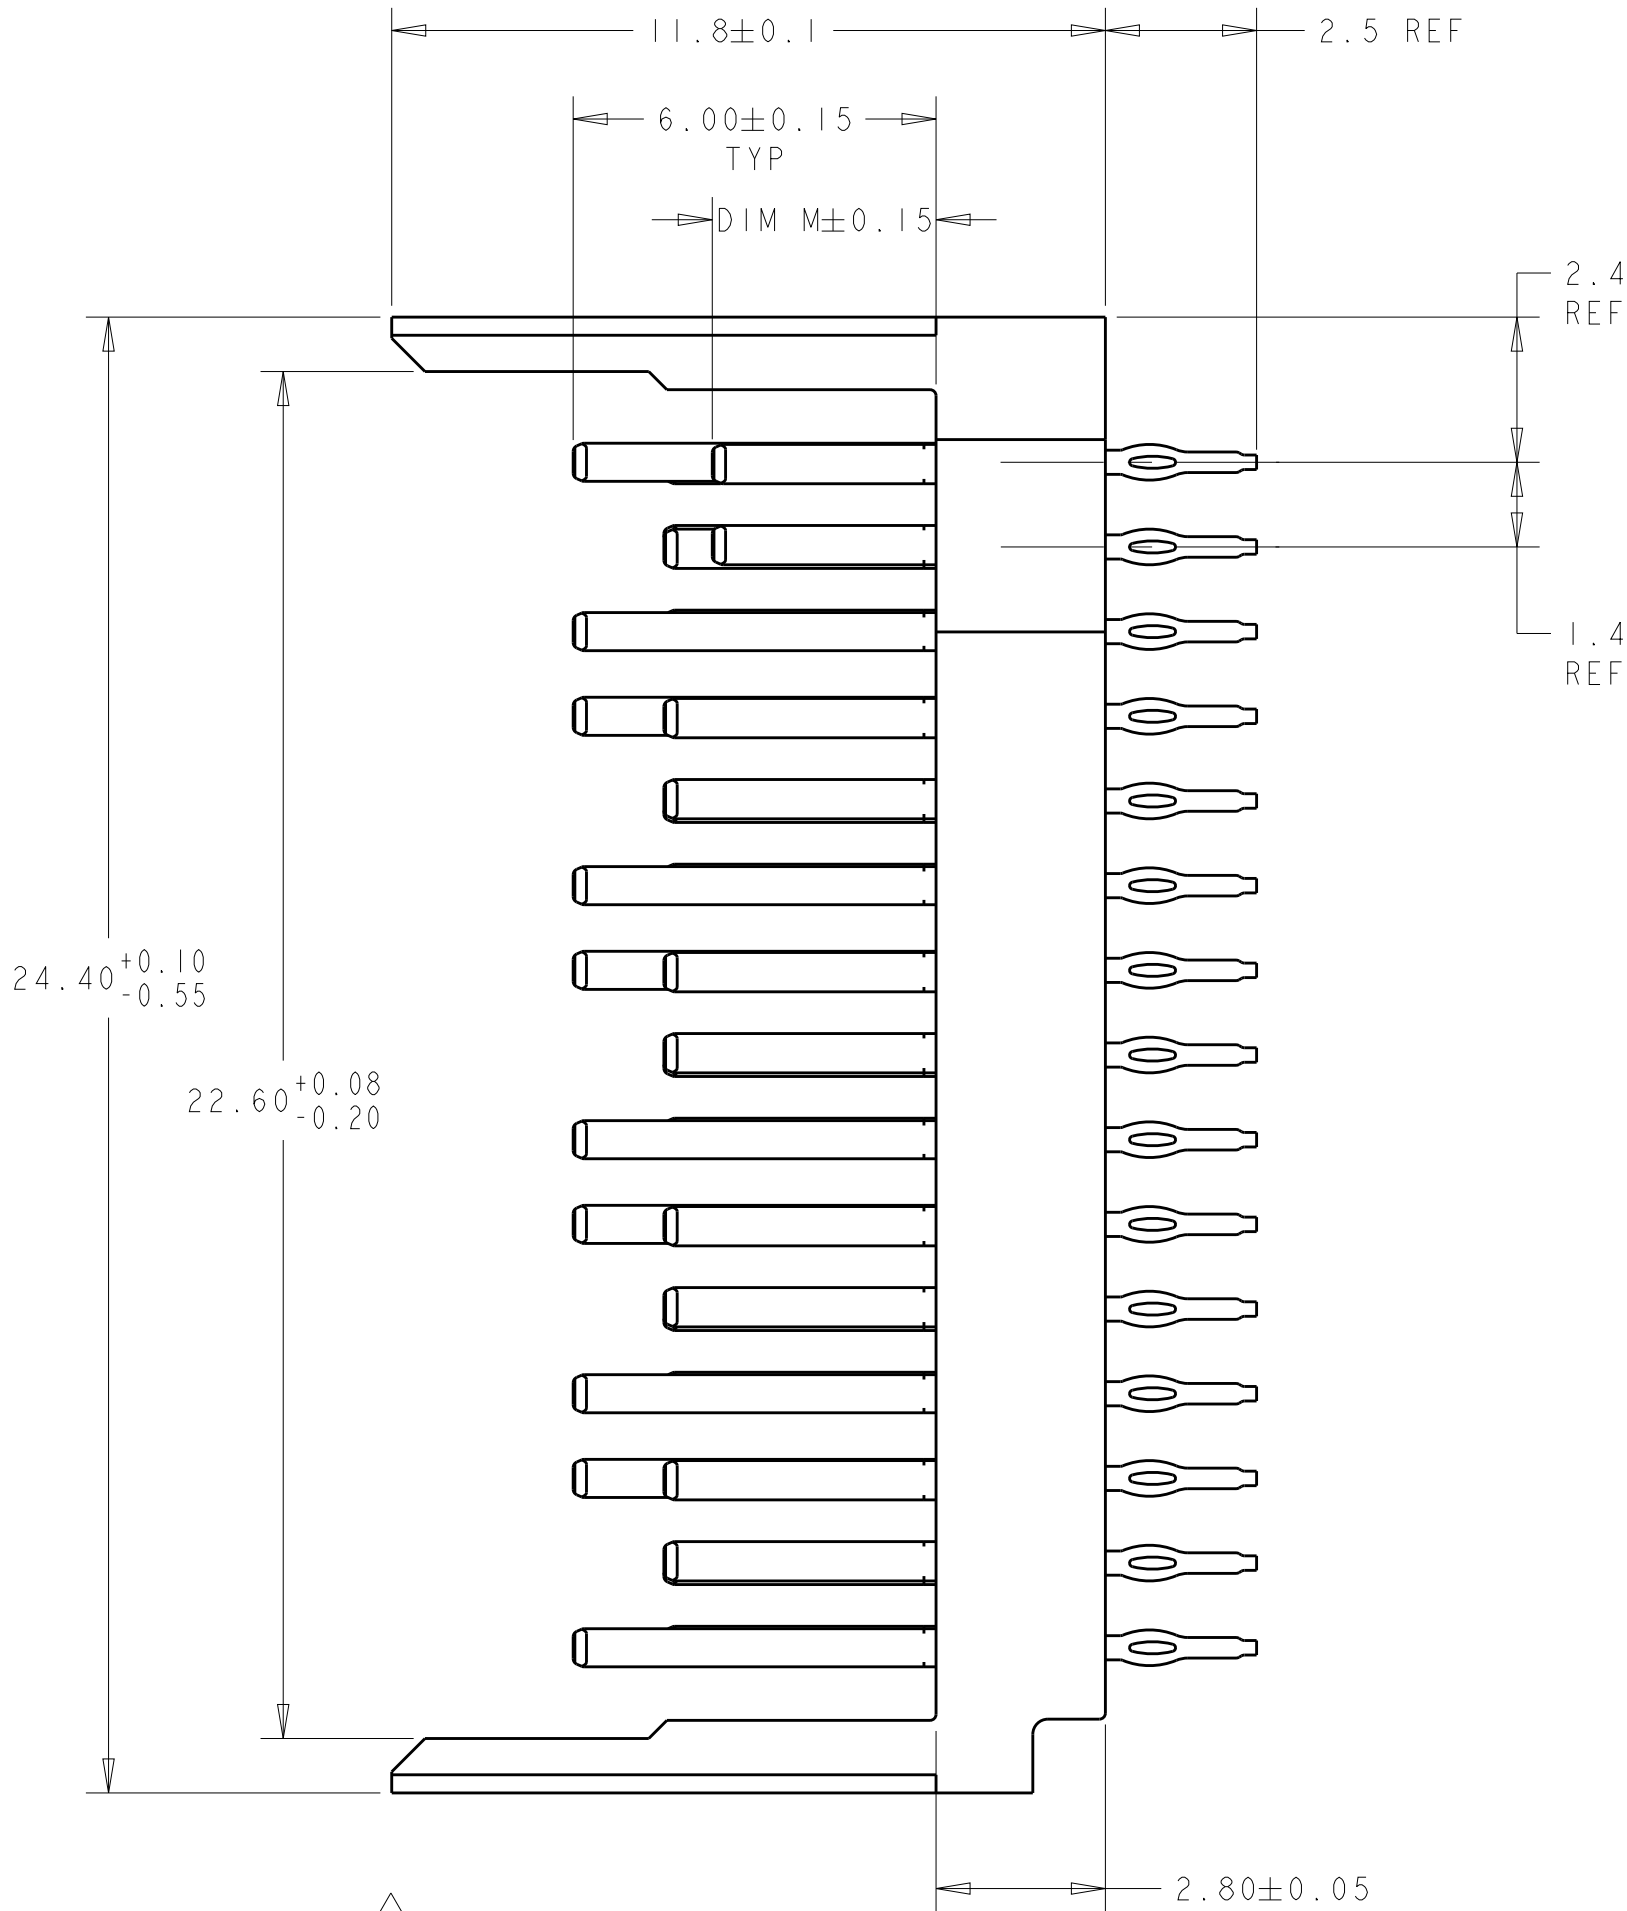
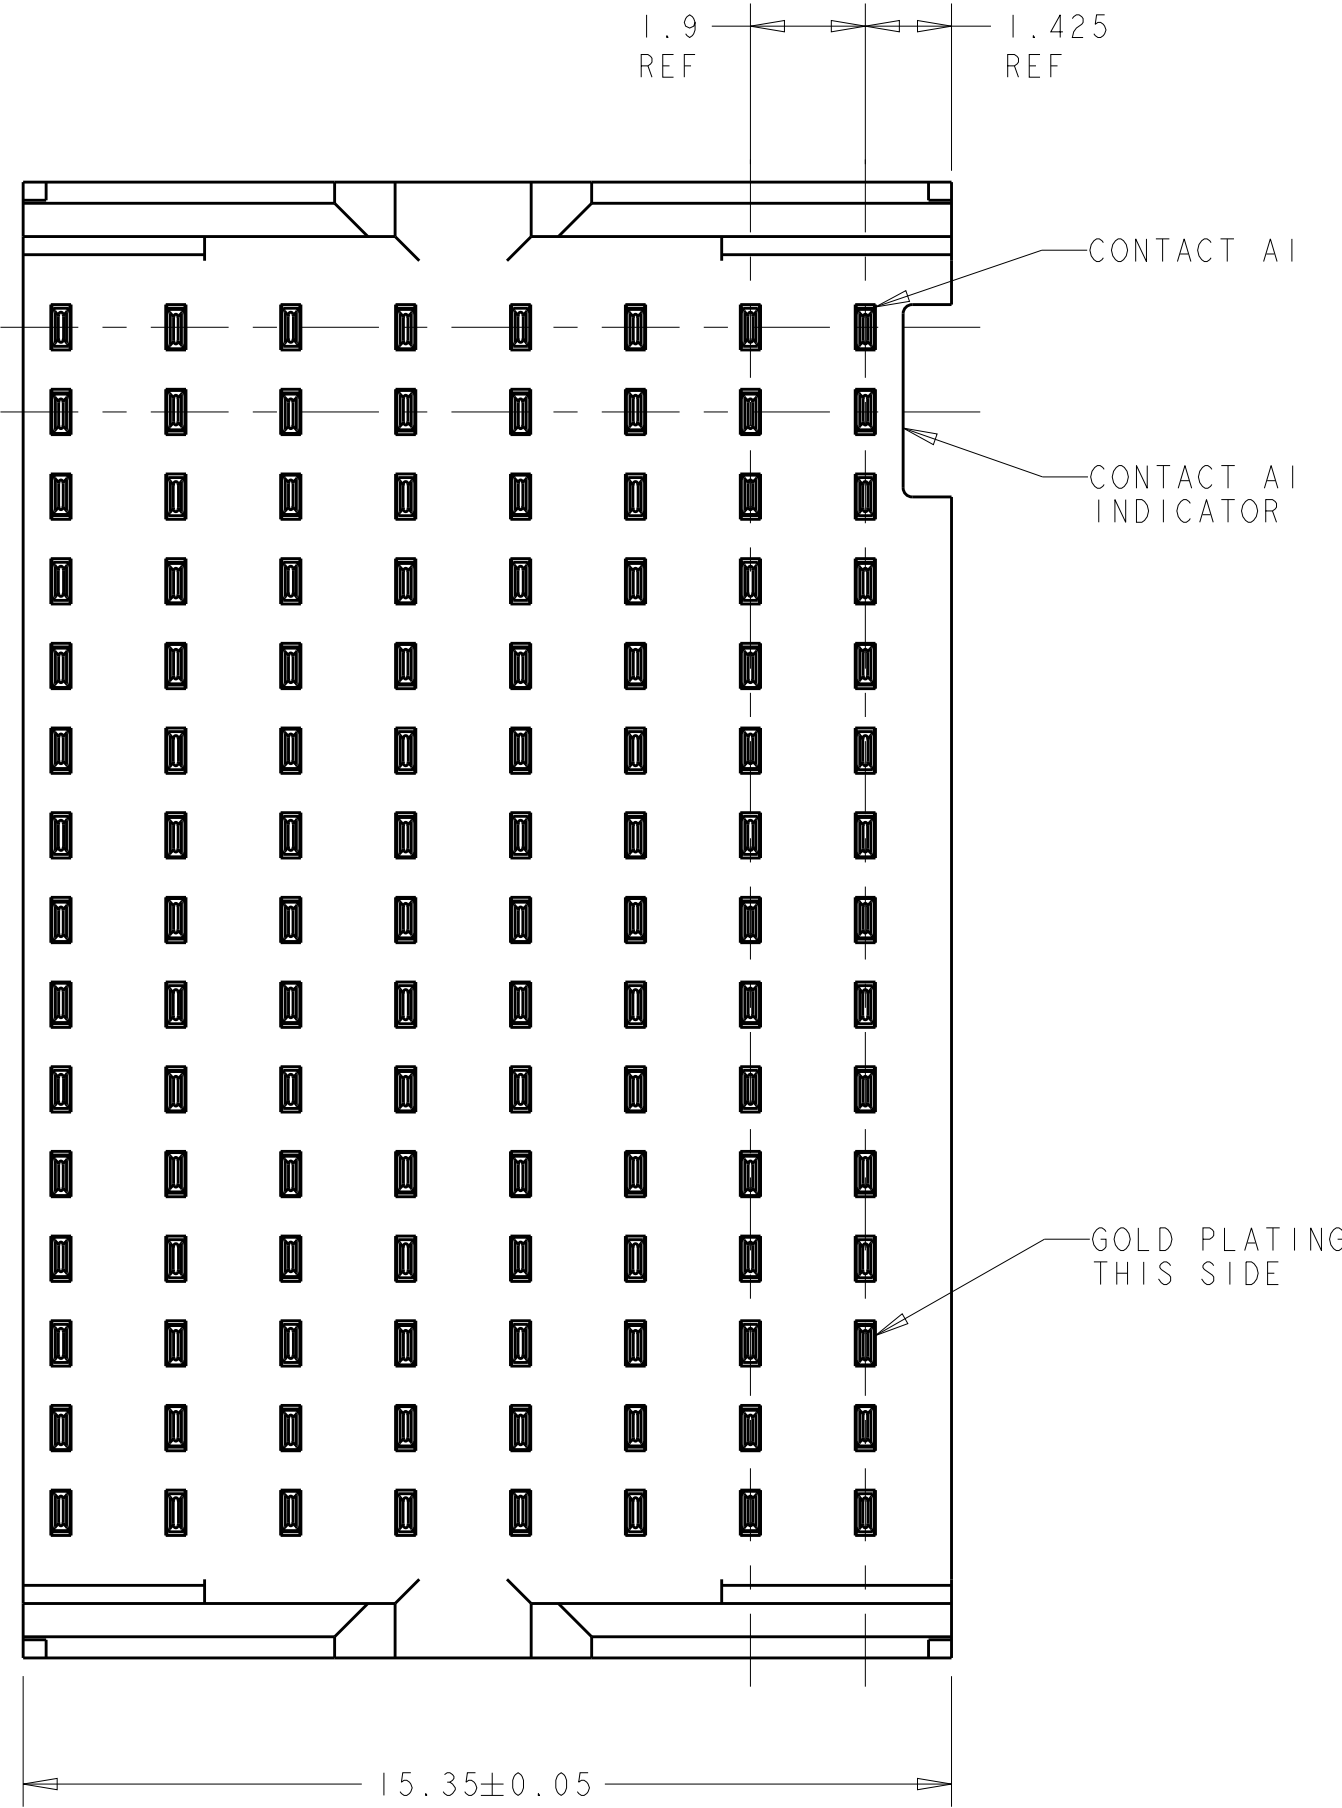


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	REVISED PER ECO-13-002771	20MAR2013	KH	RP

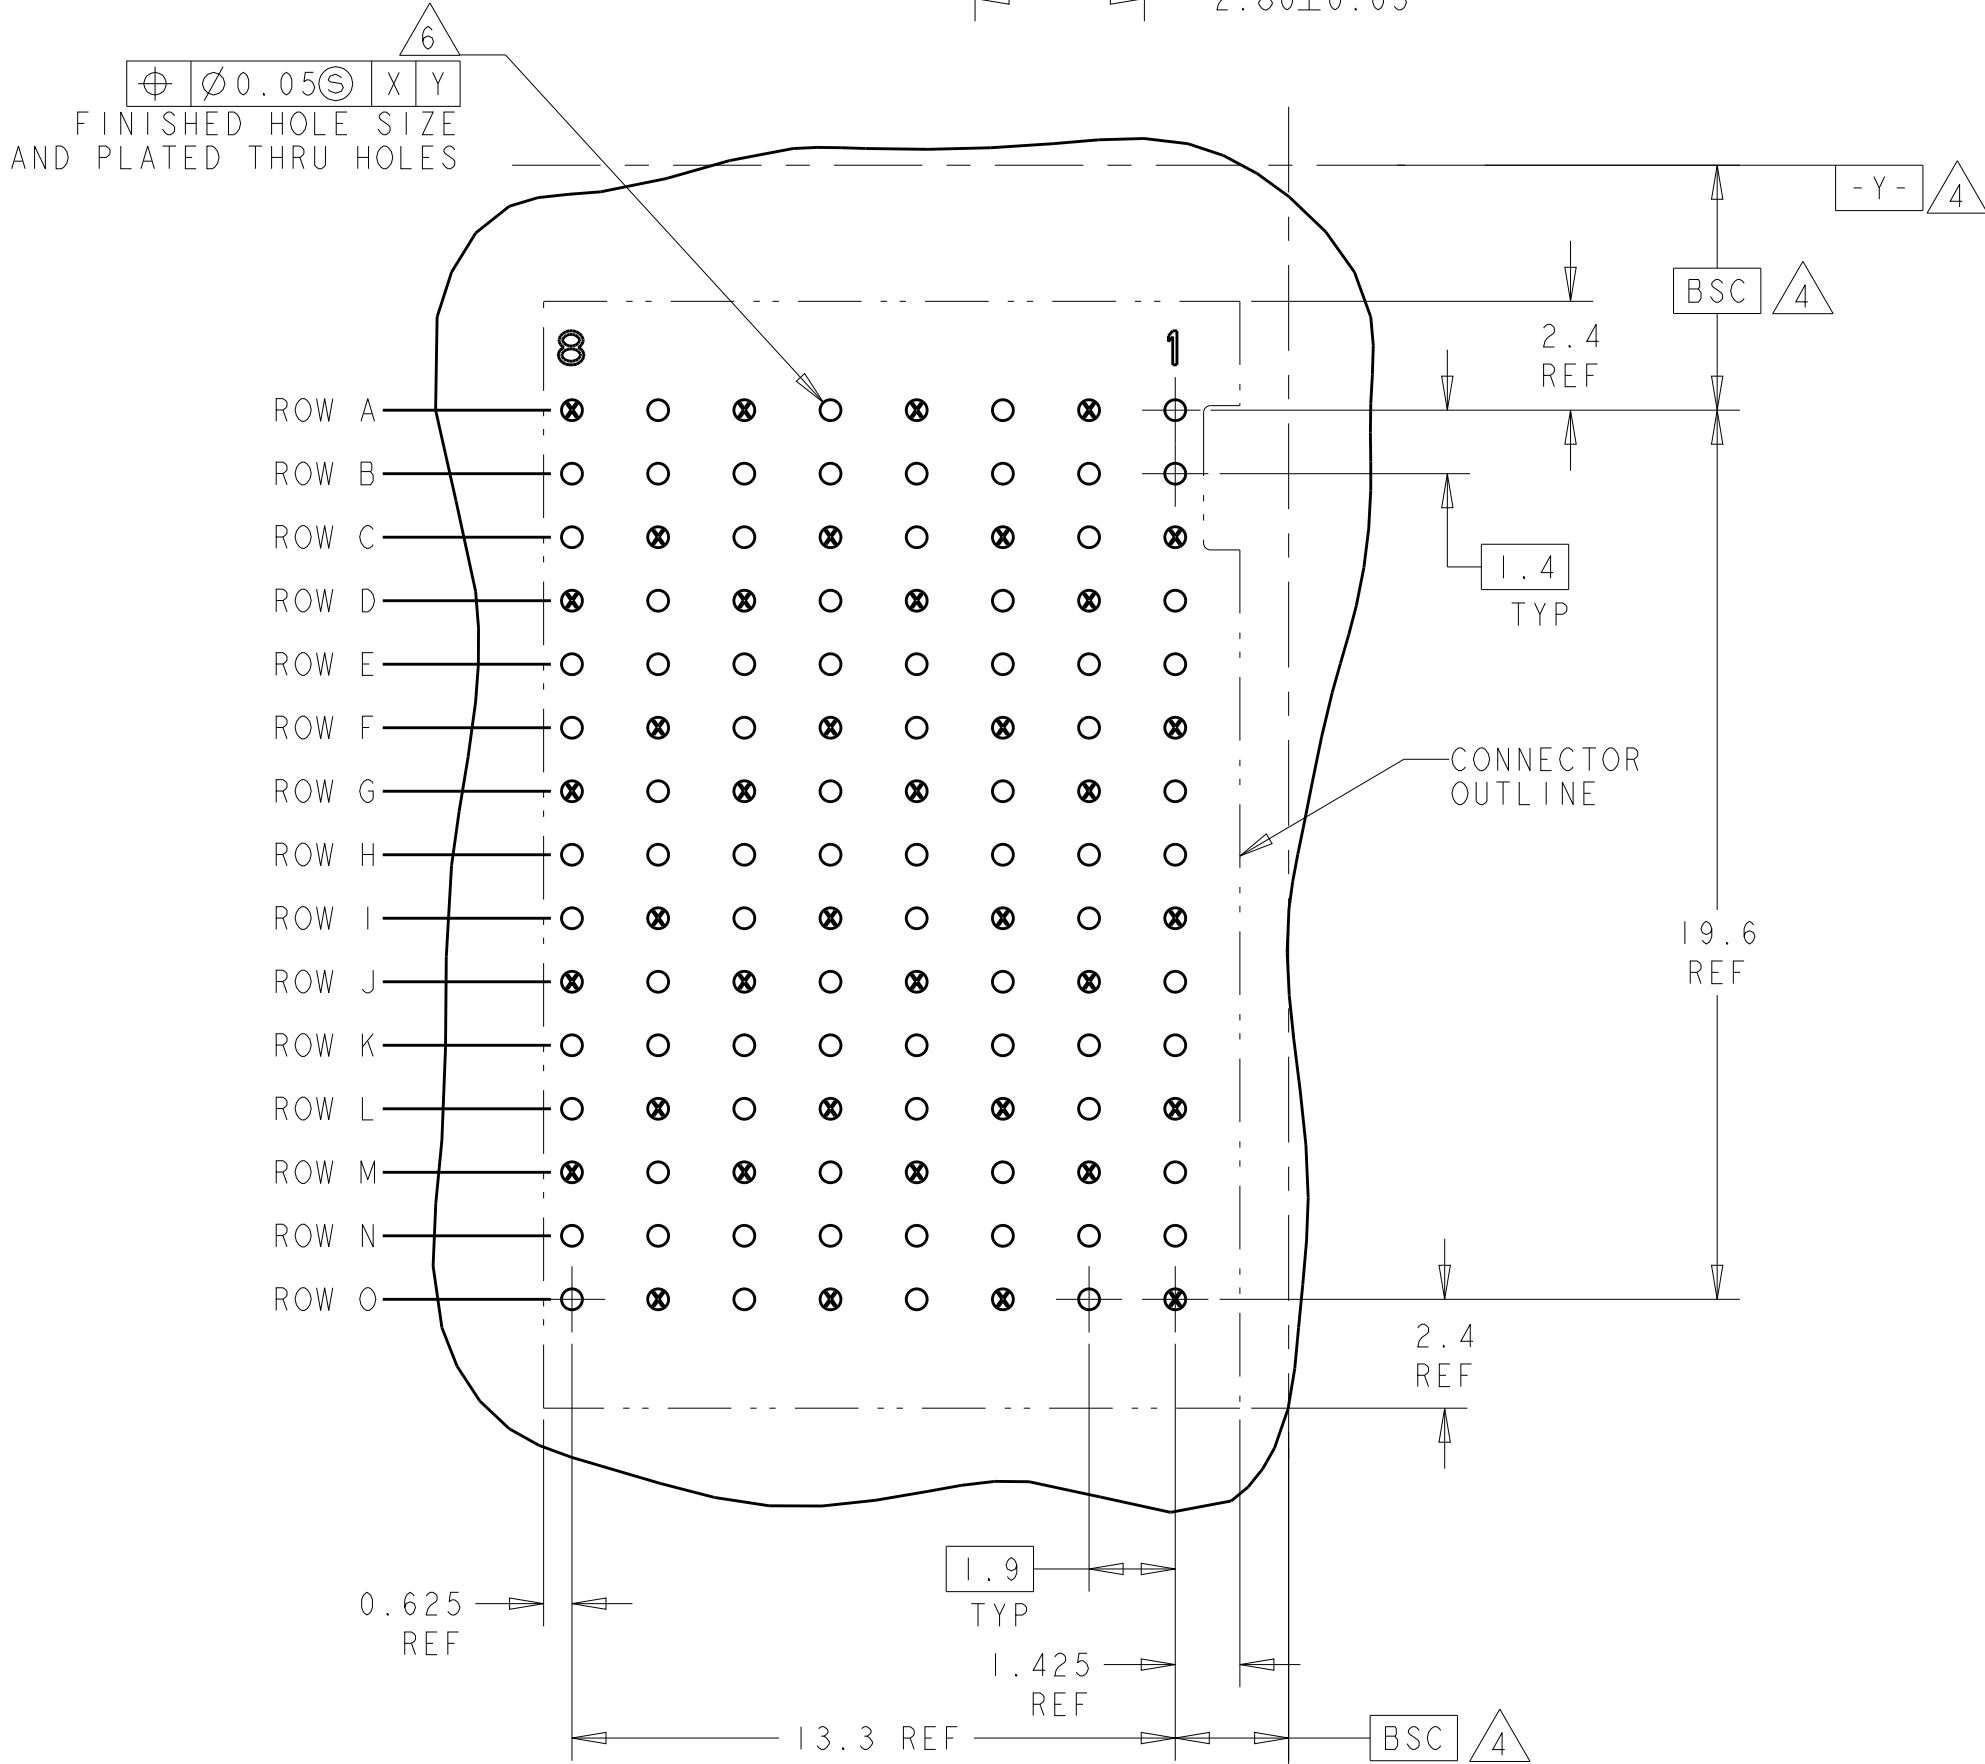


- 1 MATERIAL:
CONTACT - PHOS BRONZE.
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- 2 FINISH:
CONTACT AREA FINISH CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-2303; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE).
COMPLIANT PIN AREA- 0.5µm MIN MATTE TIN OVER 1.27µm MIN NICKEL.
- 3 CONNECTOR MARKED WITH PART NUMBER, DATE CODE AND STANDARD IN APPROXIMATE AREA SHOWN.
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
5. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 6 REFERENCE APPLICATION SPEC 114-13202 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.

CONTACT LAYOUT									
A = 4.50mm (DIM M)									
B = 3.70mm (DIM M)									
G = GROUND 6.00mm									
COLUMNS									
ROWS		8	7	6	5	4	3	2	1
	A	G	A	G	A	G	A	G	B
	B	A	A	A	A	A	A	A	B
	C	A	G	A	G	A	G	A	G
	D	G	A	G	A	G	A	G	A
	E	A	A	A	A	A	A	A	A
	F	A	G	A	G	A	G	A	G
	G	G	A	G	A	G	A	G	A
	H	A	A	A	A	A	A	A	A
	I	A	G	A	G	A	G	A	G
	J	G	A	G	A	G	A	G	A
	K	A	A	A	A	A	A	A	A
	L	A	G	A	G	A	G	A	G
	M	G	A	G	A	G	A	G	A
	N	A	A	A	A	A	A	A	A
O	A	G	A	G	A	G	A	G	

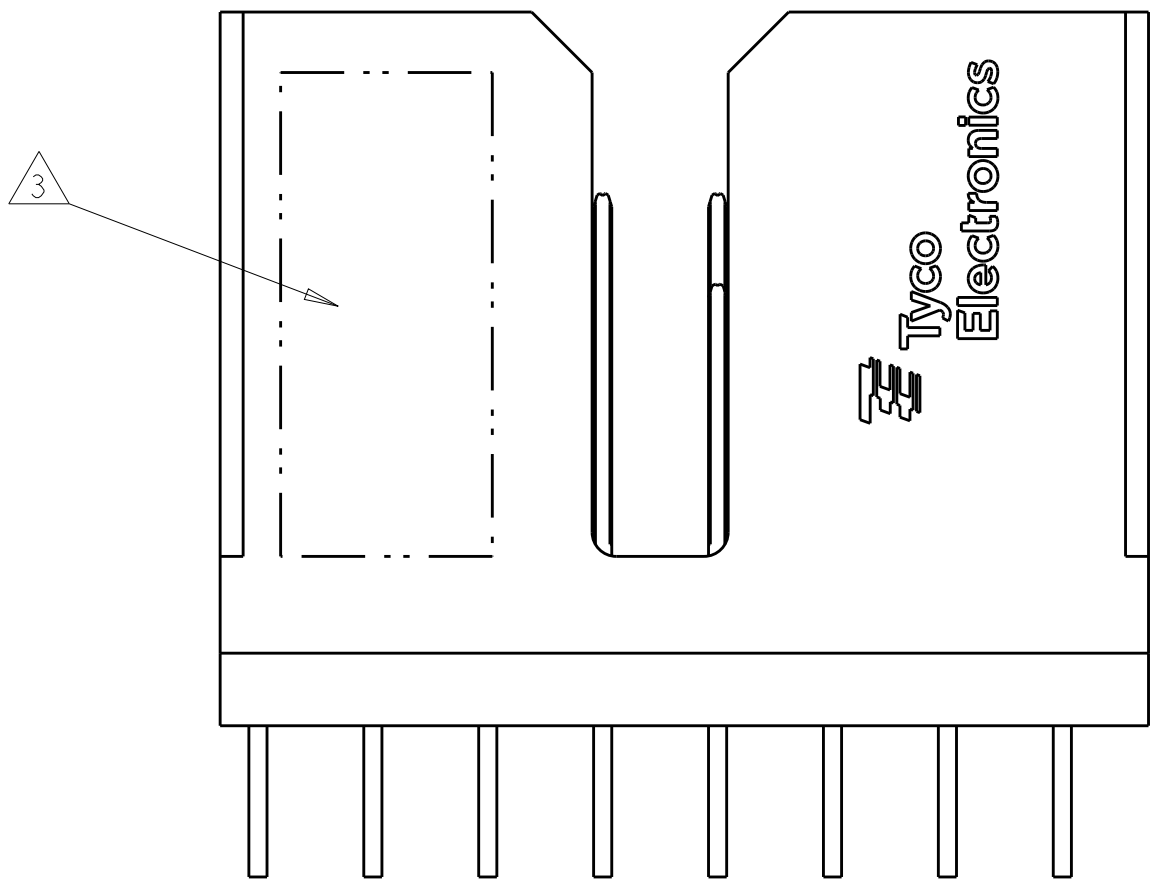

○ = SIGNAL
⊗ = GROUND
RECOMMENDED PC BOARD
LAYOUT BACKPLANE,
COMPONENT SIDE SHOWN
SCALE 6:1

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN B. CARBO 21MAY2008		 TE Connectivity	
DIMENSIONS:			CHK R. PATTERSON 21MAY2008			
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME	
		APVD R. PATTERSON 21MAY2008			HEADER ASSEMBLY, OPEN ENDED, 5 PAIR, 8 COLUMN	
		PRODUCT SPEC			-	
		APPLICATION SPEC			-	
		SIZE			CAGE CODE	
		WEIGHT			DRAWING NO	
MATERIAL		FINISH			RESTRICTED TO	
-  -		-  -			A100779C=1934956	
CUSTOMER DRAWING			SCALE 8:1		SHEET 1 OF 1 REV C	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1934956-1](#)