

High-precision current-detection elements

RL-L series: four-terminal type




Newly released: A four-terminal structure with separate voltage- and current-terminals assures high-precision TCR of 50ppm/°C and 0.5% tolerance.

RoHS compliant



SPECIFICATIONS

Mechanical

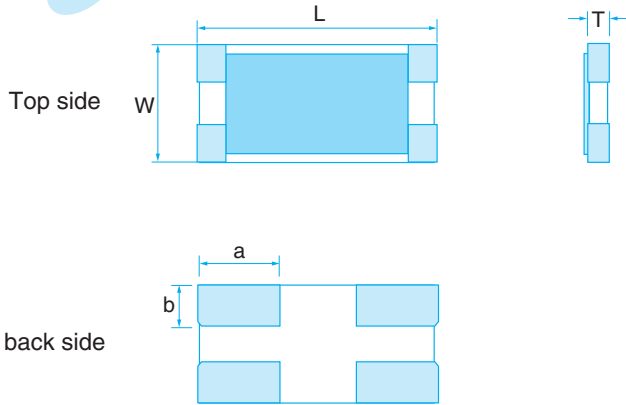

Dimension (Inch Size)	RL1632L4 (1206)	RL2550L4 (2010)	RL3264L4 (2512)
L	3.2±0.2	5.0±0.2	6.4±0.2
W	1.6±0.2	2.5±0.2	3.2±0.2
a	1.0±0.2	1.7±0.2	2.1±0.2
b	0.55±0.2	0.9±0.2	1.2±0.2
T	0.5±0.15	0.5±0.15	0.5±0.15

(unit : mm)

Equivalent circuit



V=Voltage Terminal
I=Current Terminal

Electrical


Type	RL1632L4	RL2550L4	RL3264L4		
Power	1/2W	3/4W	1W		
Tolerance %(code)	±0.5%(D) ±1%(F)				
Resistance Range (Ω)	10~500m		3~5m	6~500m	
TCR ppm /°C(code)	±50ppm/°C		±100ppm/°C	±50ppm/°C	
Terminal Resistance (Ω)	10~47m	50~500m	3~8m	10~47m	50~500m
	5 M or less	20 M or less	1 M or less	5 M or less	20 M or less
Resistance Value (Ω)	E-12 series 50, 500m		E-12 series 3, 4, 5, 6, 7, 8, 50, 500m		
Package	1,000(T1)pcs/reel, 5,000(T5)pcs/reel				

· Contact us for even lower resistance values.



PART NUMBER

RL 1632 L4 - R033 - F - T1(T5)

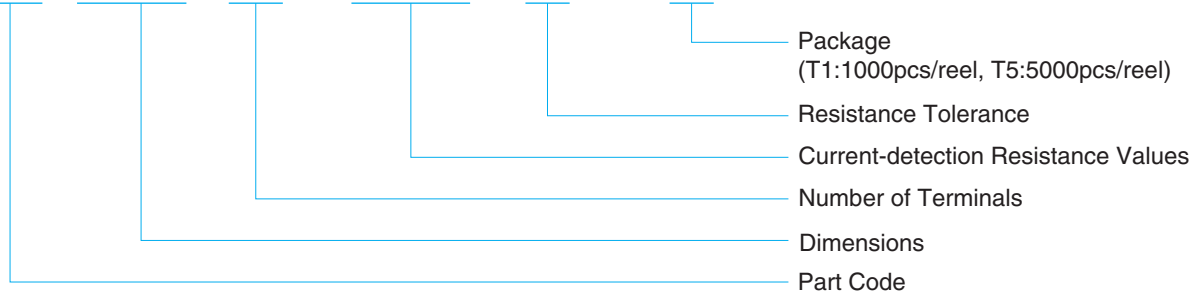

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Susumu:

[RL3264L4-R003-F](#) [RL3264L4-R004-F](#) [RL3264L4-R005-F](#) [RL3264L4-R006-F](#) [RL3264L4-R007-F](#) [RL3264L4-R008-F](#)

[RL3264L4-R010-F](#) [RL3264L4-R012-F](#) [RL3264L4-R015-F](#) [RL3264L4-R018-F](#) [RL3264L4-R022-F](#) [RL3264L4-R027-F](#)

[RL3264L4-R033-F](#) [RL3264L4-R039-F](#) [RL3264L4-R047-F](#) [RL3264L4-R050-F](#) [RL3264L4-R056-F](#) [RL3264L4-R068-F](#)

[RL3264L4-R082-F](#) [RL3264L4-R100-F](#) [RL3264L4-R150-F](#) [RL3264L4-R180-F](#) [RL3264L4-R220-F](#) [RL3264L4-R270-F](#)

[RL3264L4-R390-F](#) [RL3264L4-R500-F](#)