

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
E	B		C	ECR-06-001518	19JAN06	JMS	FWK

NOTES:

- 1 PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3 Au PLATING
- 4 Ni PLATING
- 5 THIS ITEM MUST BE WHITE
- 6 HAND TOOL : 9-1478240-0
- 7 DIE SET : 9-1478242-0
- 8 ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE:DC - 2 GHz

NOMINAL IMPEDANCE:75 Ohm

INSULATION RESISTANCE:5000 MOhm

WORKING VOLTAGE:500 Volts RMS at Sea Level

DIELECTRIC WITHSTAND VOLTAGE:1500 Volts RMS Max

CONTACT RESISTANCE:

CENTRE CONTACT:1.50 mOhm Max

OUTER CONTACT:0.20 mOhm Max

VSWR @ 2GHz:1.20:1 Max





INSERTION LOSS dB @ x 2 GHz:0.20 Max
- 9 MECHANICAL CHARACTERISTICS


COUPLING RETENTION FORCE:445N Min

CABLE RETENTION FORCE:170N Min

DURABILITY:500 Cycles Min
- 10 ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE:-65 to +165 DegC

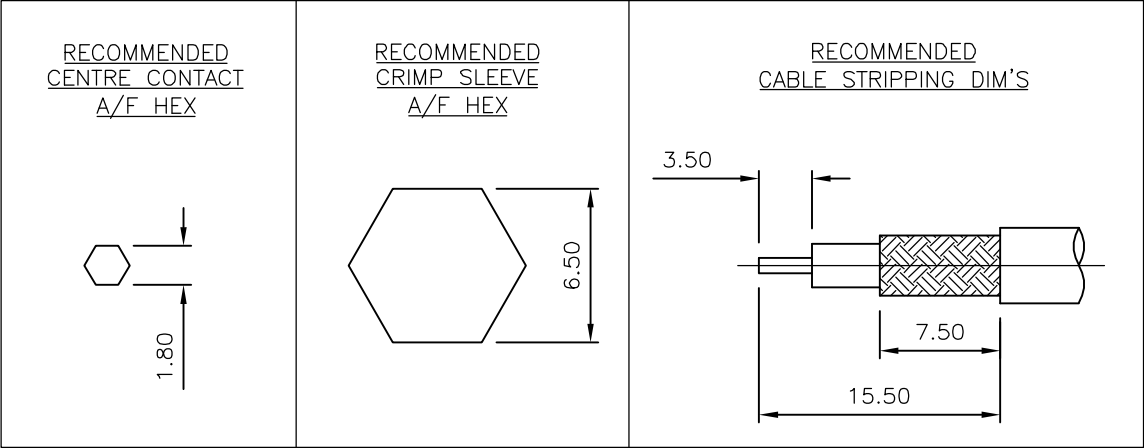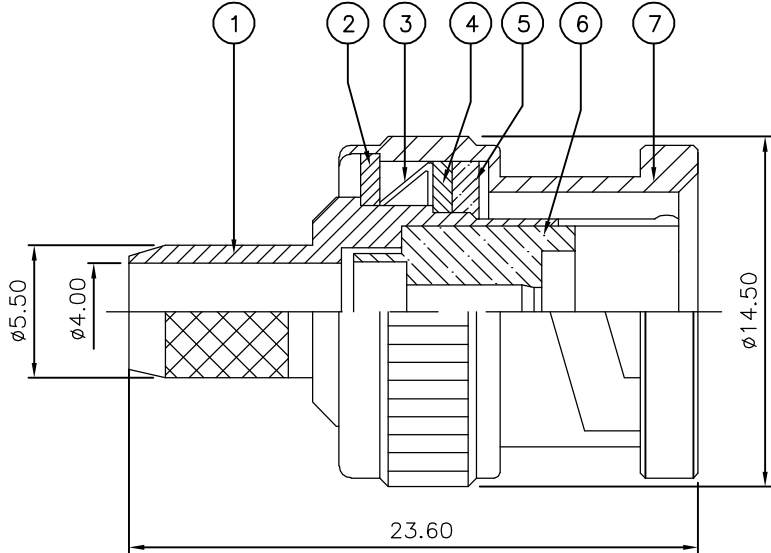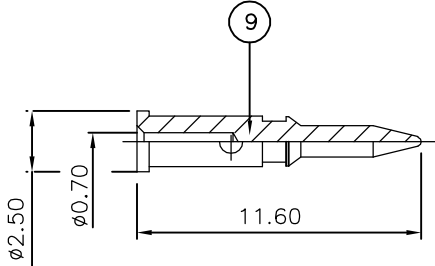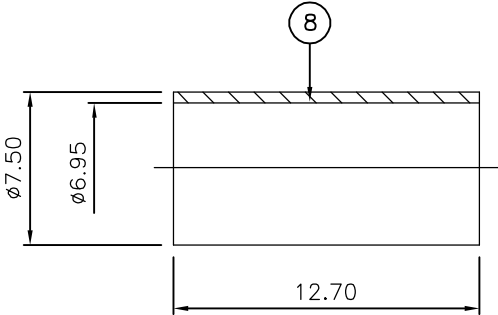

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SANDWELL	19JAN06	tyco Electronics Tyco Electronics Corporation Bideford EX39 4HE					
		CHK S.PARLOW	19JAN06						
		APVD F.WHEELER-KING	19JAN06						
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME					
				BNC STRAIGHT PLUG CRIMP 75 OHM					
				PSF1/3M,TM3304					
				-					
MATERIAL		APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
SEE TABLE		411-3247		A3	00779	C-1337517	-		
		WEIGHT							
		-							
CUSTOMER DRAWING				SCALE	NTS	SHEET	1 OF 1	REV	C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-1337517-0](#)