



LOC	DIST			REVISIONS				
G	14	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
					J	REV / 0G10-0026-99	12FEB99	MLE SU

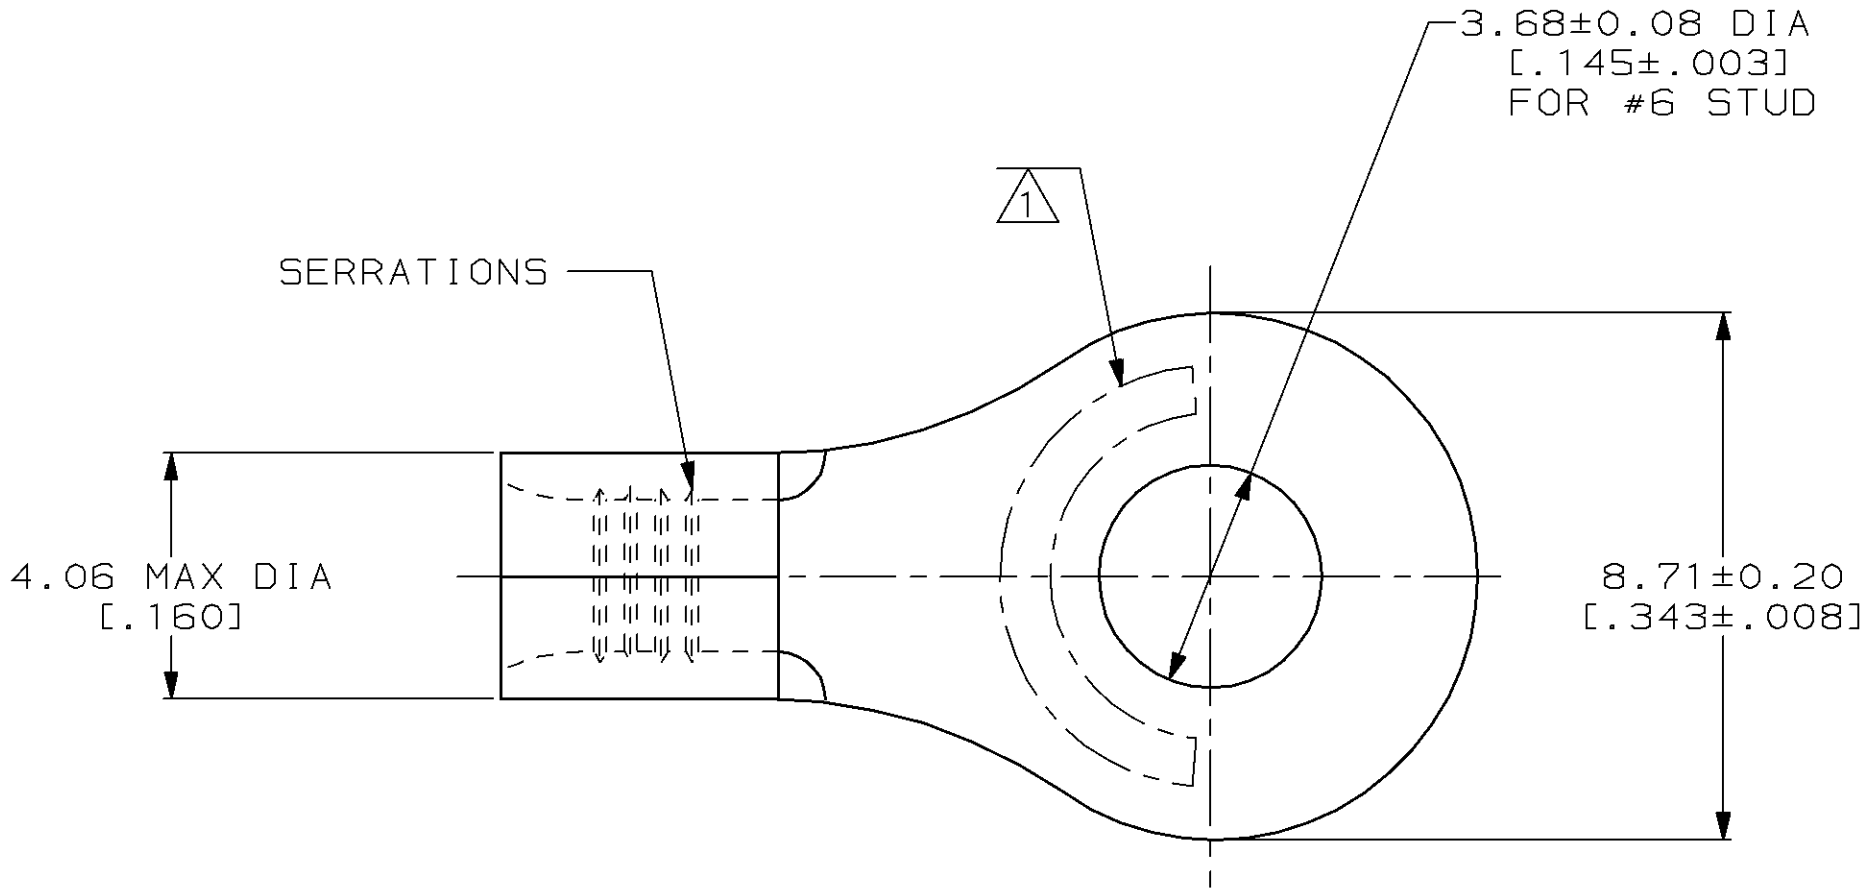

AMP WIRE RANGE	UL E13288 Listed
16-14 AWG STRANDED	16-14 AWG STRANDED
CS LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

1 STAMP AMP 16-14* APPROX AS SHOWN

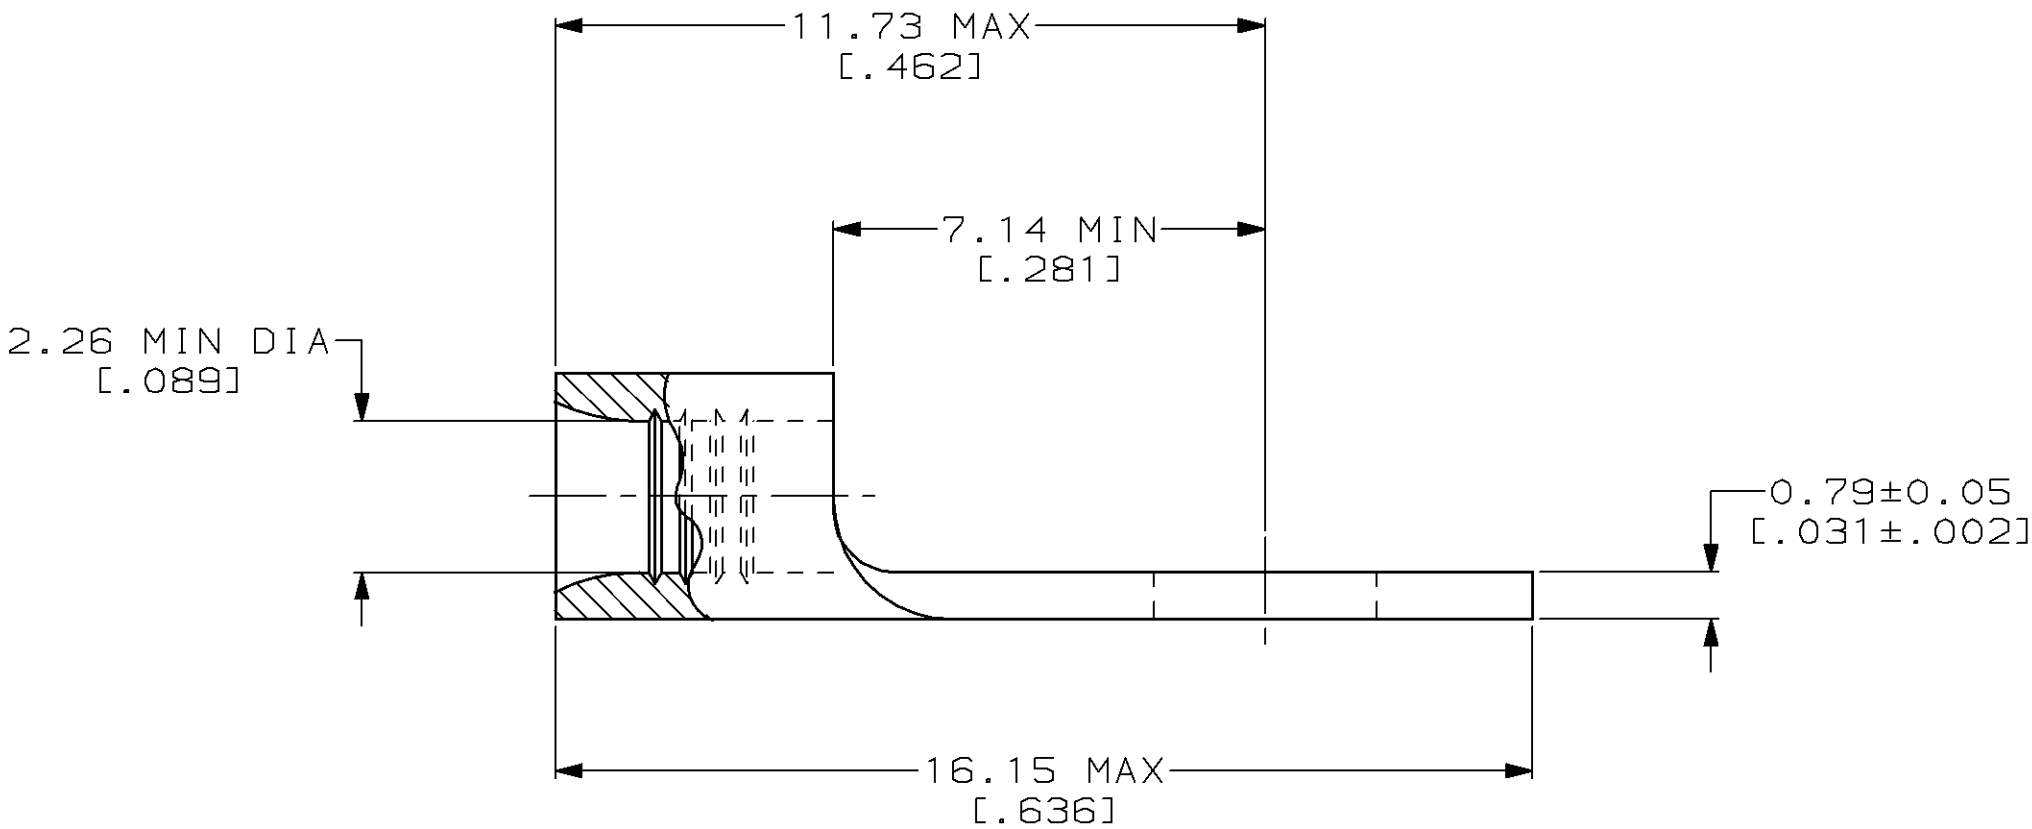

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX			30695		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS			VOLTAGE RATING: NOT APPLICABLE			PART NO		
FOR APPLICATION TOOLING INFORMATION			WIRE CROSS SECTIONAL AREA RANGE: 1.04-2.62mm² [2,050-5,180] CIR MILS STRANDED			NAME		
FOR ORDER ENTRY			THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.			TERMINAL, RING TONGUE, BUDGET		
PRODUCT INFORMATION CENTER 1-800-522-6752			DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -			SIZE		
TOOLING ASSISTANCE CENTER 1-800-722-1111			MATERIAL COPPER PER ASTM B-152 ANNEALED			CAGE CODE		
1-800-526-5142			FINISH TIN PLATE 0.00254[.000100] MIN THK PER ASTM B-545			DRAWING NO		
			DR 2-4-93 TA BRINKMAN			SCALE		
			CHK 2-4-93 DA PATTERSON			8:1		
			APPD 2-4-93 DE MILLER			SHEET		
			APPD 2-4-93 JL MECKLEY			1 OF 1		
			PRODUCT SPEC -					
			APPLICATION SPEC -					
			WEIGHT -					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[30695](#)