


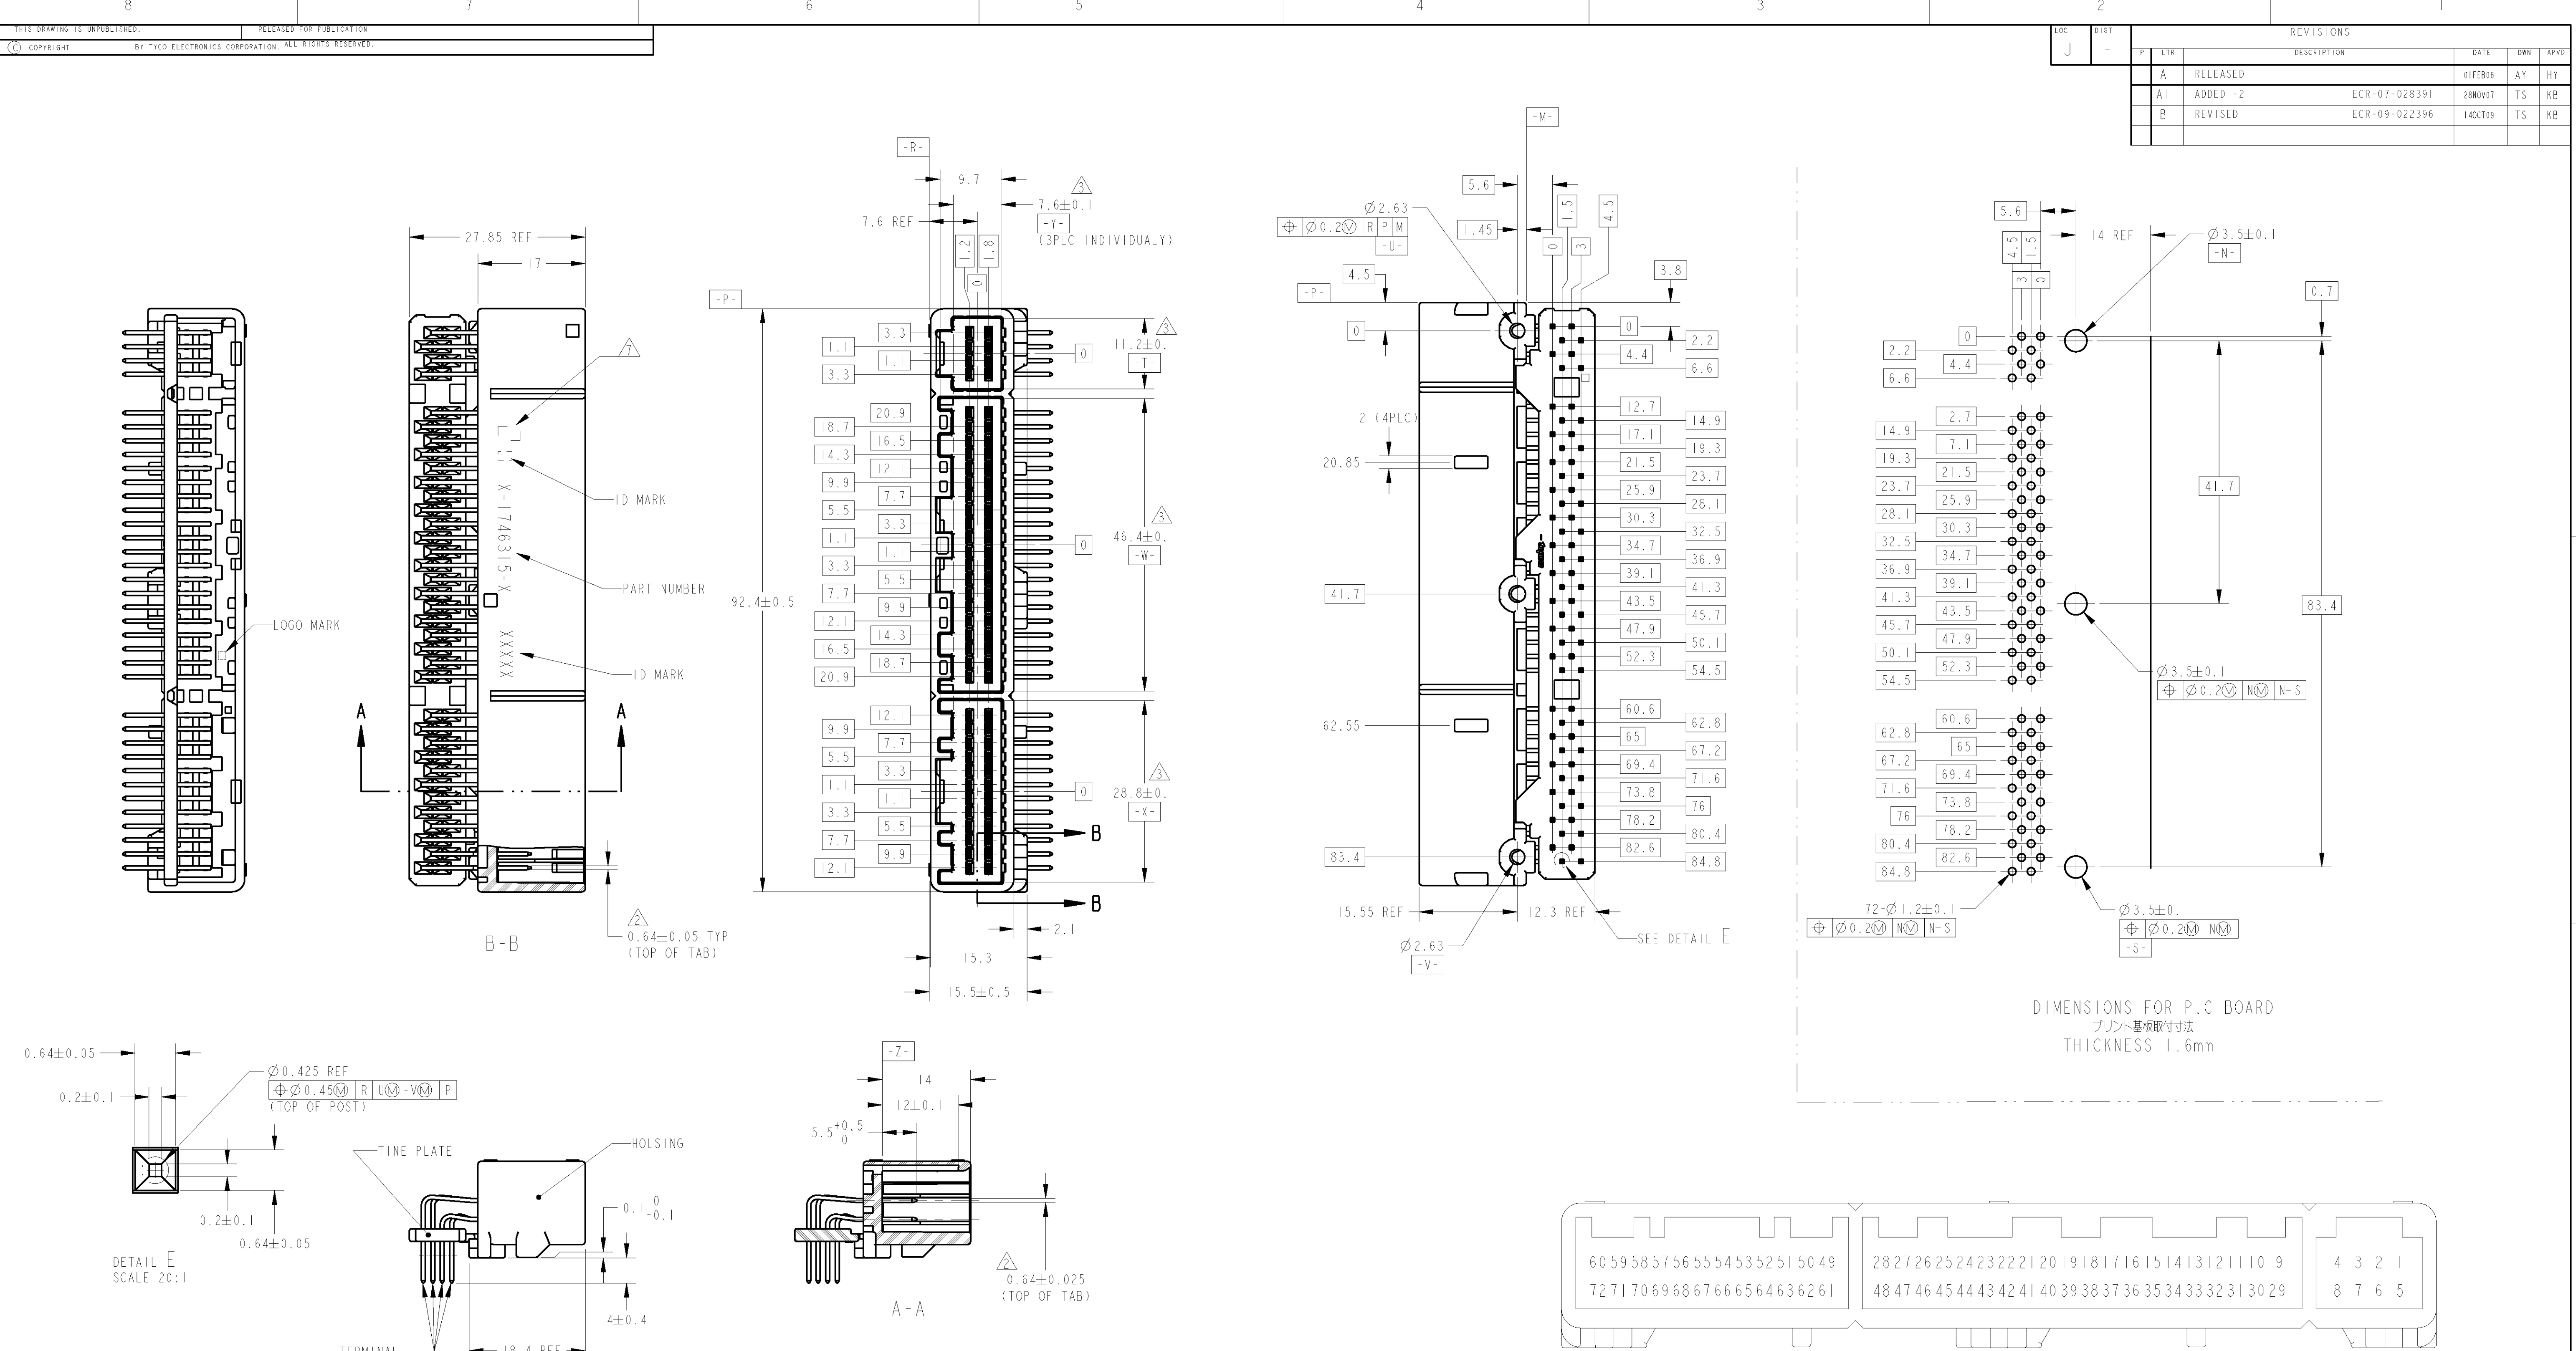

1. MATING CONNECTOR PART NO.: SEE TABLE-1		1. 嵌合相手コネクタ図番: TABLE-1 参照	
△ $\begin{matrix} \oplus \\ \ominus \end{matrix} \begin{matrix} 0.30 \\ 0.30 \end{matrix} \begin{matrix} Z \\ Z \end{matrix} \begin{matrix} Y \\ Y \end{matrix} \begin{matrix} DT \\ DT \end{matrix} \begin{matrix} M \\ M \end{matrix}$		△ $\begin{matrix} \oplus \\ \ominus \end{matrix} \begin{matrix} 0.30 \\ 0.30 \end{matrix} \begin{matrix} Z \\ Z \end{matrix} \begin{matrix} Y \\ Y \end{matrix} \begin{matrix} DT \\ DT \end{matrix} \begin{matrix} M \\ M \end{matrix}$	
TERTIARY DATUM: [-X-], [-W-], [-T-] OF EACH BLOCK.		3次DTMについては、[-X-], [-W-], [-T-] を各々のブロック毎に適用すること	
△ MEASURED AT 6mm FROM [-Z-]		△ [-Z-] より6mmの位置で測定	
4. HANDLING THIS PART SHOULD FOLLOW THE INSTRUCTION SHEET NO.411-5932		4. 本製品の取扱い、取扱説明書 No. 411-5932に従うこと	
5. APPLICABLE SCREW: PAN-HEADED, TYPE 2 TAPPING-SCREW, NOMINAL DIAMETER 3mm		5. 適用ねじ: JIS B1115, B1122タッピング"ネジ"ねじ、径3mm、呼び径3mm、長さTABLE-2参照	
LENGTH: SEE TABLE-2		6. ねじ締め付けトルク(参考値)は0.4N・m REF	
6. FASTENING TORQUE(FOR REFERENCE): 0.4N・m REF		但し、TYCO専用ねじ、専用基板の組合せの場合である	
BUT, THIS IS VALUE FOR COMBINATION OF TAPPING SCREW AND PCB FOR TESTING.		よって、管理値は別途規定すること	
SO, TORQUE FOR OPERATION SHOULD BE PROVIDED RESPECTIVELY.		適用プリント基板: 板厚はTABLE-2参照	
APPLICABLE PRINTED CIRCUIT BOARD: SEE TABLE-2 FOR THICKNESS		△ コンタクト識別用マーク	
△ MARKING FOR DESCERMENT OF THE CONTACT FINISH		△ 図略番号はFIG. 1参照	
△ CIRCUIT NUMBER: SEE FIG. 1			

2	PLASTIC BOX	PLASTIC TUBE	15, 17	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 2	NATURAL	1746315-2
1	PLASTIC BOX	PLASTIC TUBE	-	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN × 70 (BRIGHT)	NATURAL	1746315-1
MARKING マーキング	OUTER 外装	INNER 内装	GOLD PLATED CIRCUIT NO 金のつぎ回路番号	SOLDERING SIDE 半田付け部	CONTACT SIDE 接点側	COLOR 色	PART NUMBER 部品番号
PACKING STYLE 梱包形態		CONTACT FINISH コンタクト仕					

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 公差: ± 0.3		DWN A. YAMAGUCHI CHK H. YAMAGAMI APPD S. ISOHATA		Tyco Electronics Corporation Kawasaki, Japan	
1-PLC ±		2-PLC ±		PRODUCT SPEC		NAME	
3-PLC ±		4-PLC ±		APPLICATION SPEC		0.64 2ROW CONNECTOR 72POSITION CAP ASSEMBLY	
MATERIAL SPS BRASS		FINISH SEE TABLE		114-5250, 5329		SIZE 00779	
WEIGHT 18.9 g		CUSTOMER DRAWING		SCALE 2:1		SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1746315-1](#)