


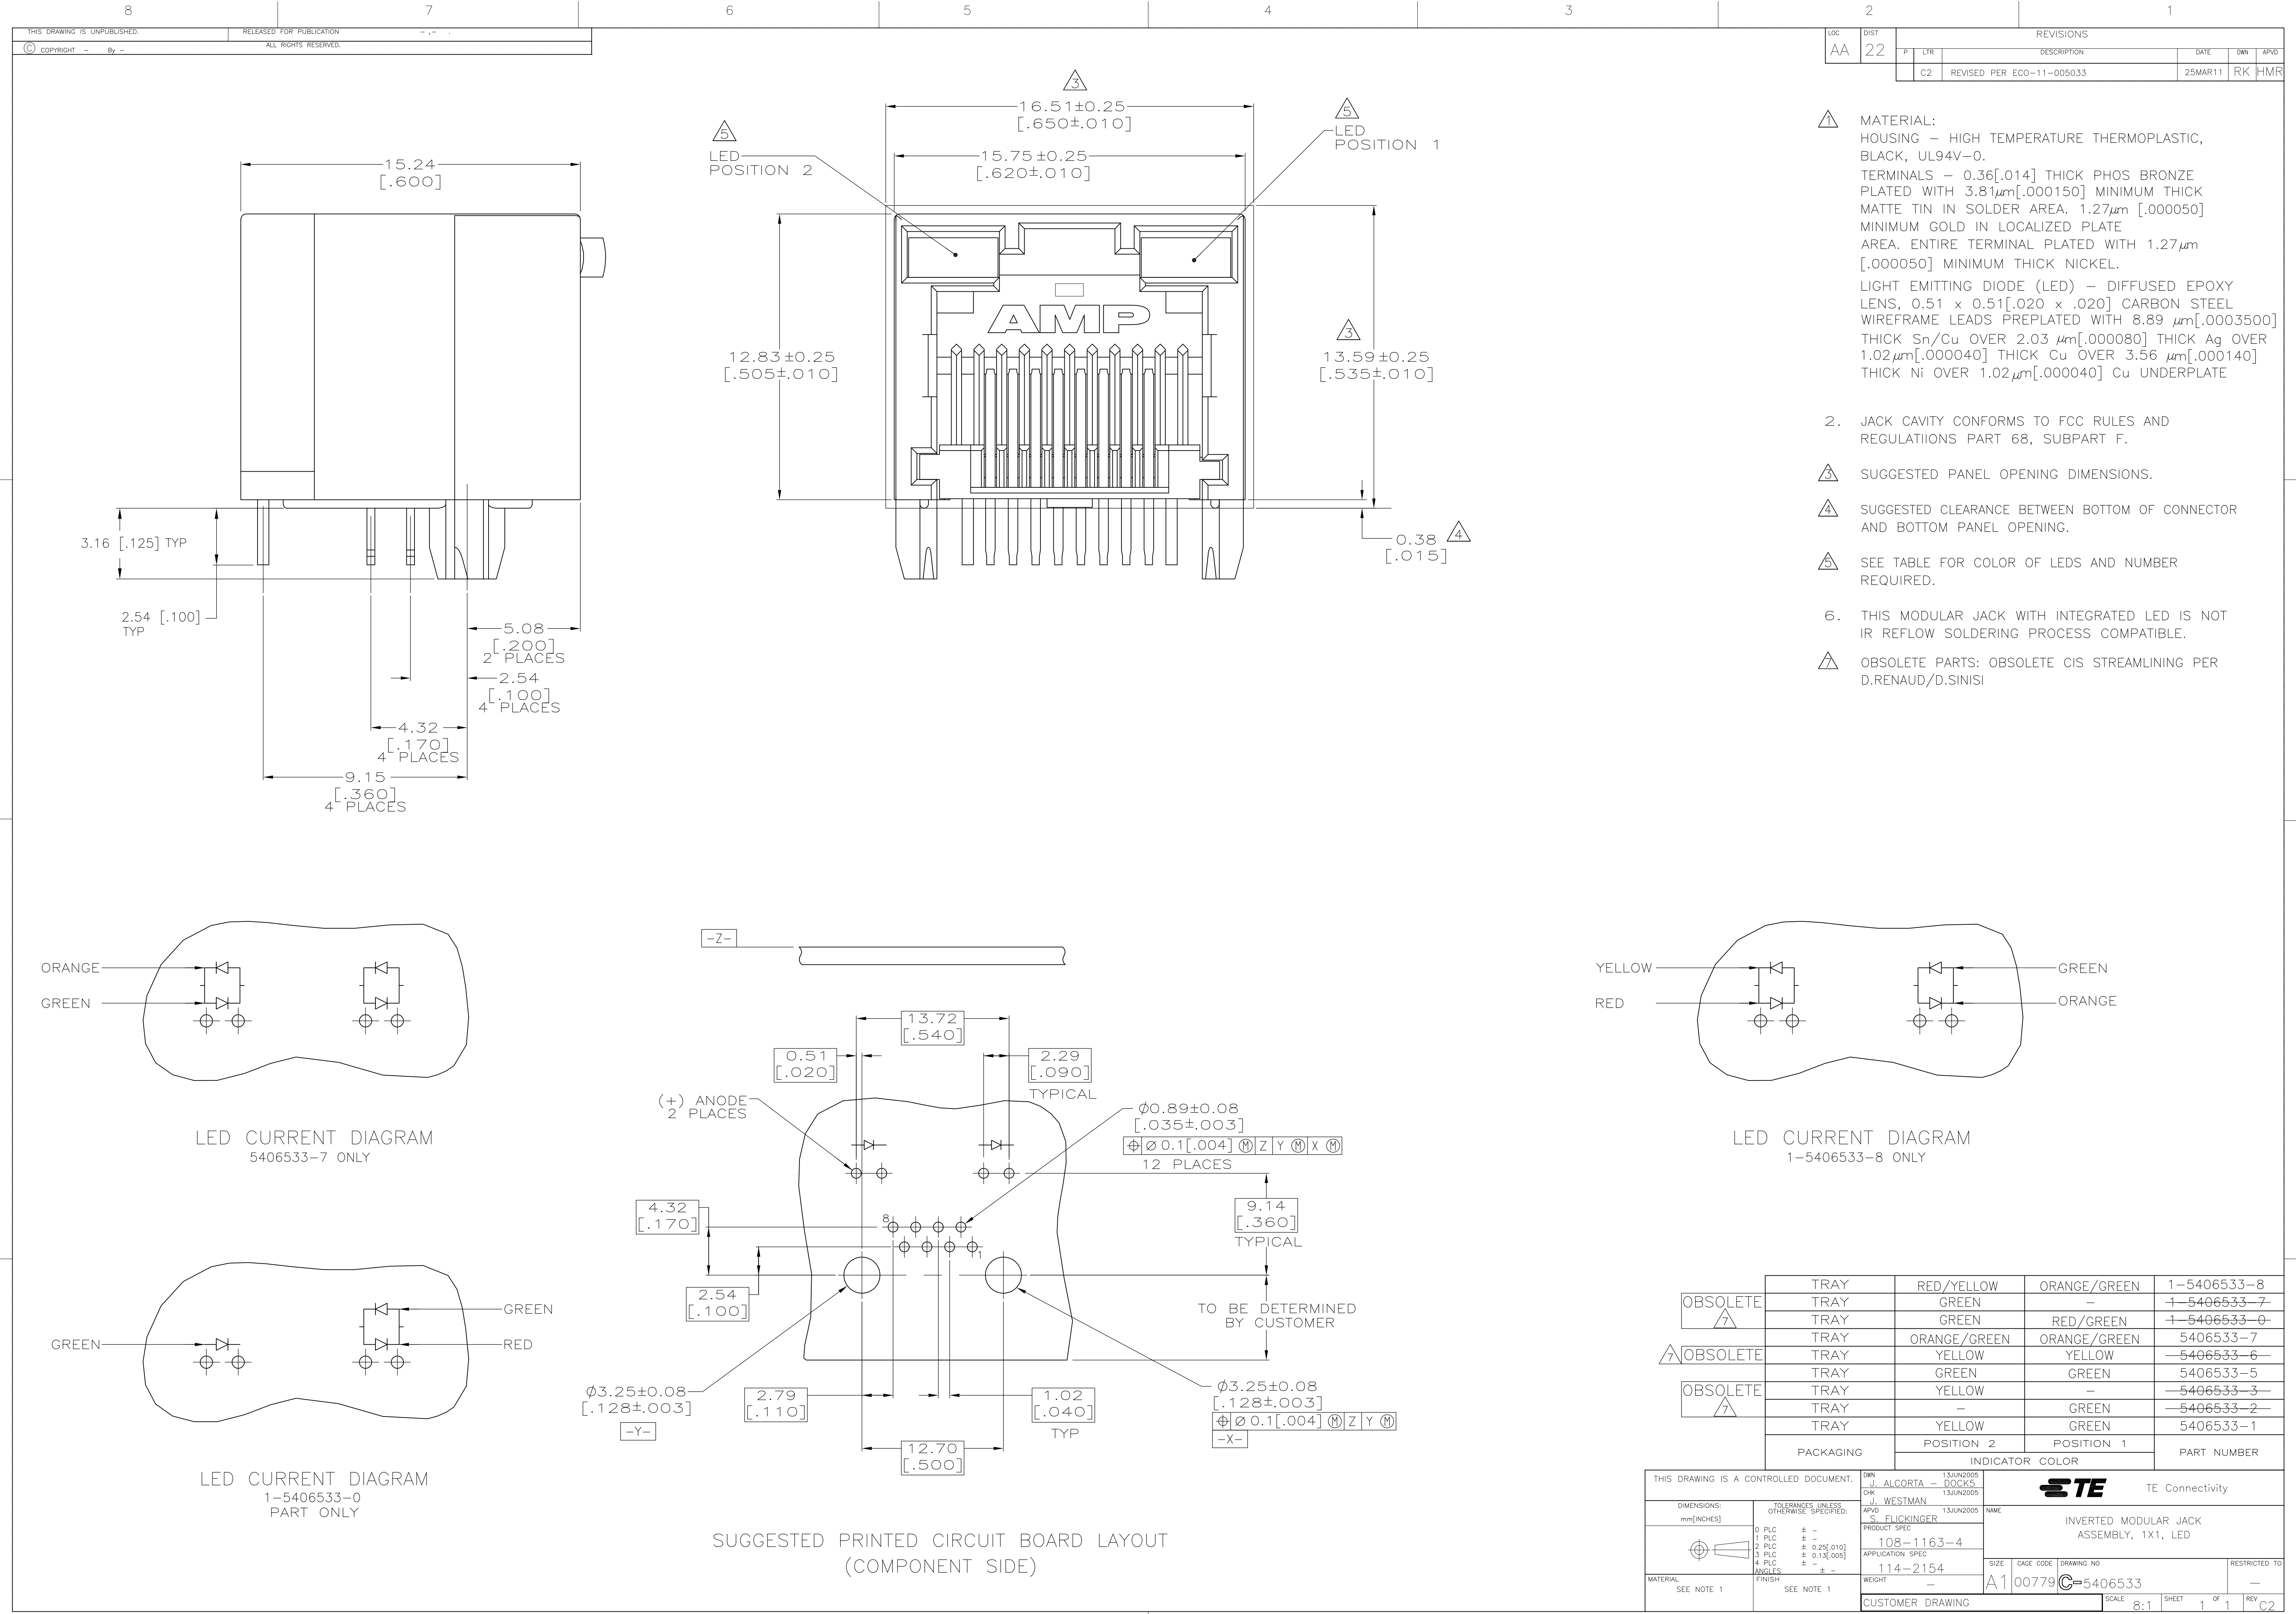

LOC		DIST		REVISIONS			
AA		22		DESCRIPTION	DATE	DWN	APVD
		C2		REVISED PER ECO-11-005033	25MAR11	RK	HMR

- △ MATERIAL:
HOUSING – HIGH TEMPERATURE THERMOPLASTIC, BLACK, UL94V-0.
TERMINALS – 0.36[.014] THICK PHOS BRONZE PLATED WITH 3.81 μ m[.000150] MINIMUM THICK MATTE TIN IN SOLDER AREA. 1.27 μ m [.000050] MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE TERMINAL PLATED WITH 1.27 μ m [.000050] MINIMUM THICK NICKEL.
LIGHT EMITTING DIODE (LED) – DIFFUSED EPOXY LENS, 0.51 x 0.51[.020 x .020] CARBON STEEL WIREFRAME LEADS PREPLATED WITH 8.89 μ m[.0003500] THICK Sn/Cu OVER 2.03 μ m[.000080] THICK Ag OVER 1.02 μ m[.000040] THICK Cu OVER 3.56 μ m[.000140] THICK Ni OVER 1.02 μ m[.000040] Cu UNDERPLATE
2. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.
- △ SUGGESTED PANEL OPENING DIMENSIONS.
- △ SUGGESTED CLEARANCE BETWEEN BOTTOM OF CONNECTOR AND BOTTOM PANEL OPENING.
- △ SEE TABLE FOR COLOR OF LEDS AND NUMBER REQUIRED.
6. THIS MODULAR JACK WITH INTEGRATED LED IS NOT IR REFLOW SOLDERING PROCESS COMPATIBLE.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE 7	TRAY	RED/YELLOW	ORANGE/GREEN	1-5406533-8
	TRAY	GREEN	-	1-5406533-7
	TRAY	GREEN	RED/GREEN	1-5406533-0
	TRAY	ORANGE/GREEN	ORANGE/GREEN	5406533-7
OBSOLETE	TRAY	YELLOW	YELLOW	5406533-6
OBSOLETE 7	TRAY	GREEN	GREEN	5406533-5
	TRAY	YELLOW	-	5406533-3
	TRAY	-	GREEN	5406533-2
	TRAY	YELLOW	GREEN	5406533-1
	PACKAGING	POSITION 2	POSITION 1	PART NUMBER
		INDICATOR COLOR		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA – DOCK5 CHK J. WESTMAN APVD S. FLICKINGER		13JUN2005 13JUN2005 13JUN2005		NAME INVERTED MODULAR JACK ASSEMBLY, 1X1, LED	
DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-1163-4		APPLICATION SPEC 114-2154	
MATERIAL SEE NOTE 1		FINISH SEE NOTE 1		WEIGHT -		SIZE A1	
				CUSTOMER DRAWING		SCALE 8:1	
				SHEET 1 of 1		REV C2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5406533-5](#)