

LOC	DIST	REVISIONS					
AD	39	P	LTR	DESCRIPTION	DATE	DWN	APVD
			H4	PART STATUS UPDATED IN THE PARTS LIST TABLE	27AUG2015	KJK	PS

D

C

B


A

D

C


B

A

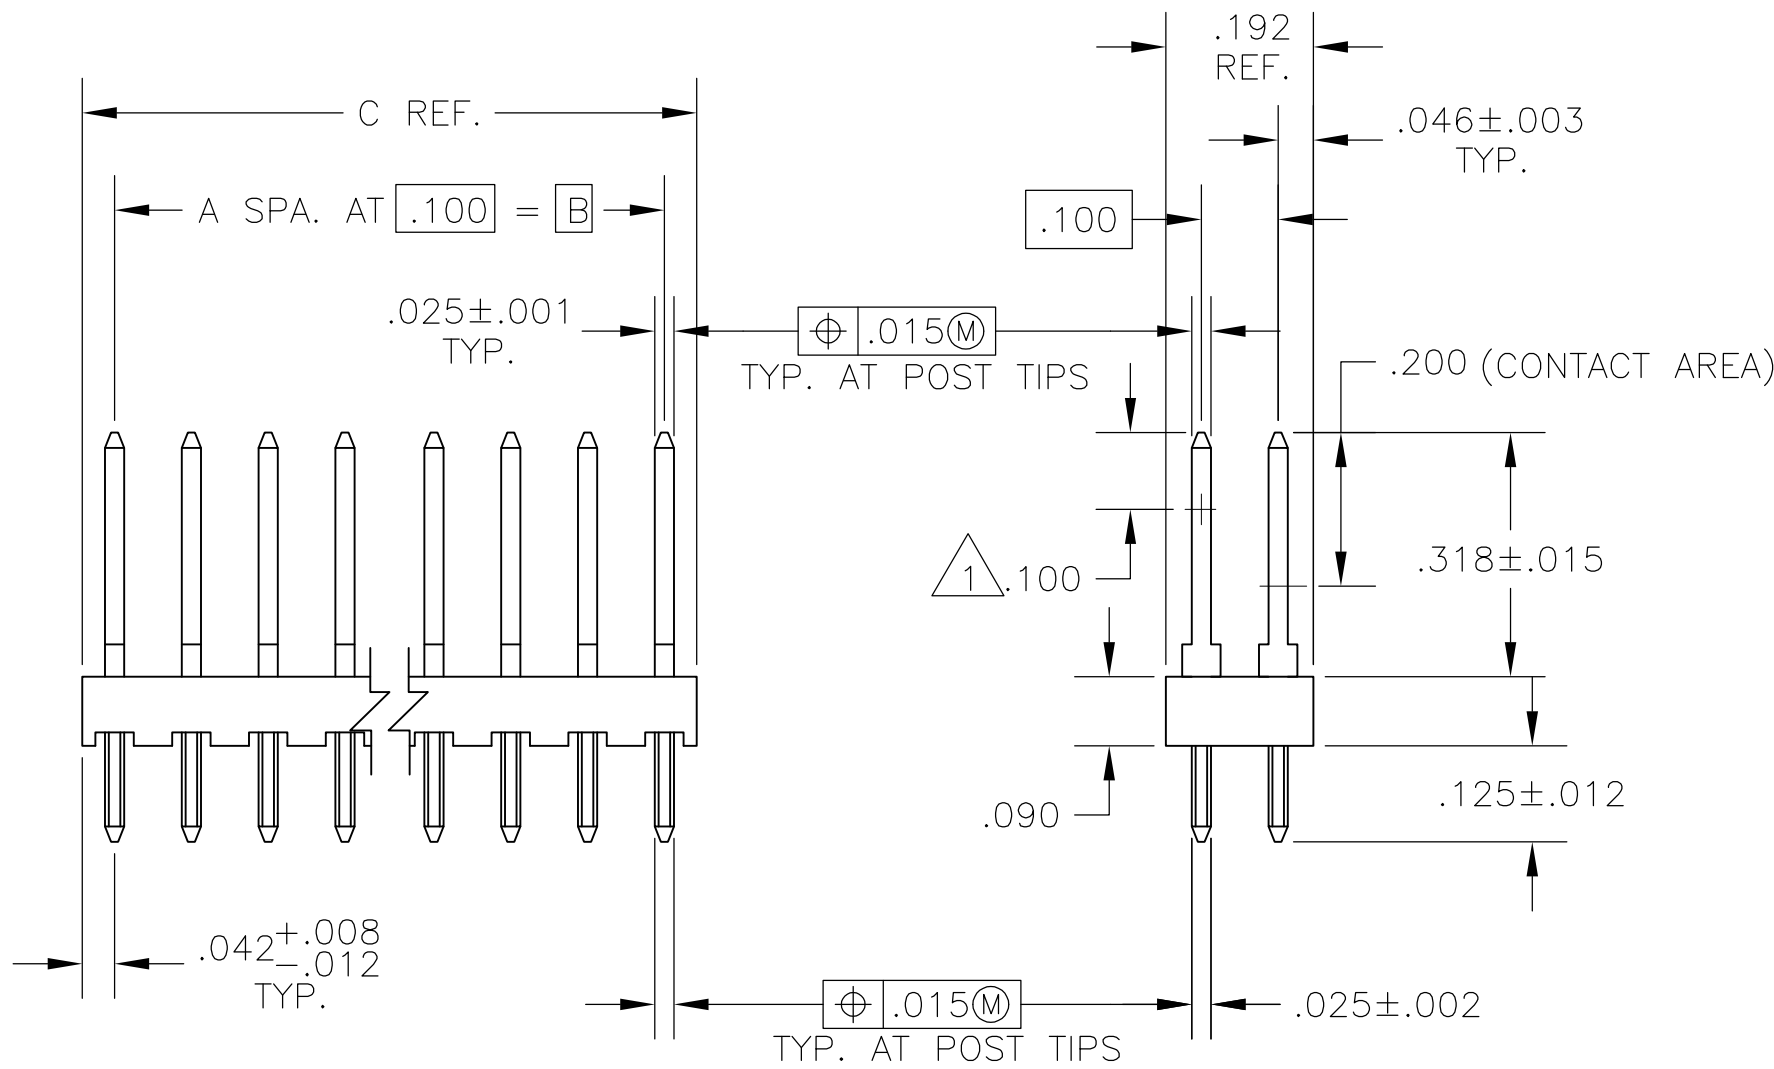

NOTES:

- POINT OF MEASUREMENT FOR PLATING THICKNESS
- THE TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD

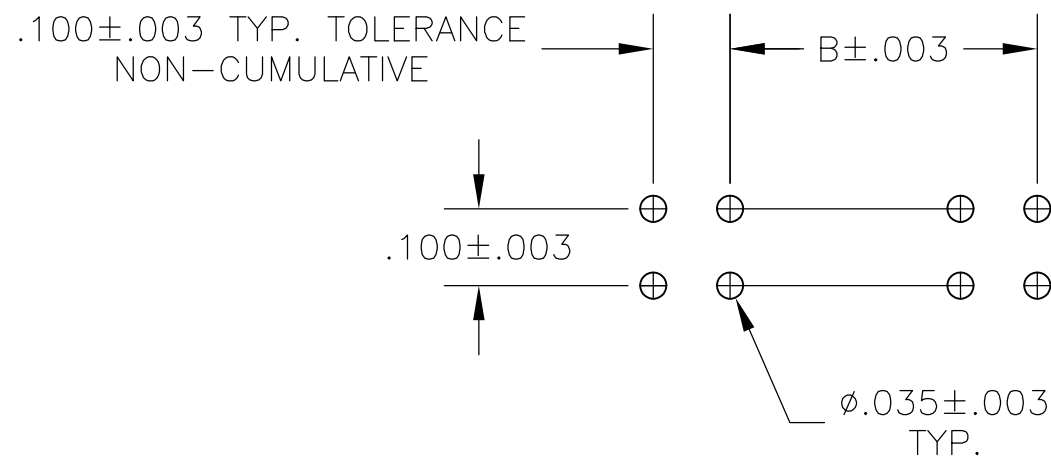

3.984	3.900	39	80	4-87227-0
3.884	3.800	38	78	3- -9
3.784	3.700	37	76	3- -8
3.684	3.600	36	74	3- -7
3.584	3.500	35	72	3- -6
3.484	3.400	34	70	3- -5
3.384	3.300	33	68	3- -4
3.284	3.200	32	66	3- -3
3.184	3.100	31	64	3- -2
3.084	3.000	30	62	3- -1
2.984	2.900	29	60	3- -0
2.884	2.800	28	58	2- -9
2.784	2.700	27	56	2- -8
2.684	2.600	26	54	2- -7
2.584	2.500	25	52	2- -6
2.484	2.400	24	50	2- -5
2.384	2.300	23	48	2- -4
2.284	2.200	22	46	2- -3
2.184	2.100	21	44	2- -2
2.084	2.000	20	42	2- -1
1.984	1.900	19	40	2- -0
1.884	1.800	18	38	1- -9
1.784	1.700	17	36	1- -8
1.684	1.600	16	34	1- -7
1.584	1.500	15	32	1- -6
1.484	1.400	14	30	1- -5
1.384	1.300	13	28	1- -4
1.284	1.200	12	26	1- -3
1.184	1.100	11	24	1- -2
1.084	1.000	10	22	1- -1
.984	.900	9	20	1- -0
.884	.800	8	18	-9
.784	.700	7	16	-8
.684	.600	6	14	-7
.584	.500	5	12	-6
.484	.400	4	10	-5
.384	.300	3	8	-4
.284	.200	2	6	-3
.184	.100	1	4	-2
.084	—	—	2	87227-1
C	B	A	NO OF POS	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. MAYER	5-15-85	 TE Connectivity							
		CHK T. ZOLA	5-21-85								
DIMENSIONS: INCHES		APVD T. ZOLA	5-21-85	NAME ASSEMBLY, MOD II, HEADER, DOUBLE ROW, .100 X .100 CL. VERTICAL, .025 SQUARE POSTS							
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC								
			—								
			APPLICATION SPEC								
			—								
MATERIAL		WEIGHT	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
HOUSING—FLAME RETARDANT THERMOPLASTIC, COLOR—BLACK POSTS—PHOS BRONZE		FINISH POSTS—.000015 GOLD ON THE CONTACT AREA, GOLD FLASH ON SOLDER AREA, ALL OVER .000050 NICKEL		A2	00779	C-87227	—				
CUSTOMER DRAWING						SCALE	4:1	SHEET	1 of 1	REV	H4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-87227-4](#)