

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0010085081](#)
Status: **Active**
Overview: [KK 508 Connector System](#)
Description: KK Header, Vertical, with Polarizing Backwall, 8 Circuits, Tin (Sn) Plating

Documents:

[3D Model](#) [Product Specification PS-99020-0087-001 \(PDF\)](#)
[3D Model \(PDF\)](#) [Packaging Specification PK-2599-0001-000 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL E29179

General


Product Family PCB Headers
 Series [2599](#)
 Application Power, Wire-to-Board
 Overview [KK 508 Connector System](#)
 Product Name KK 508
 UPC 800753744585

Physical

Breakaway No
 Circuits (Loaded) 8
 Circuits (maximum) 8
 Color - Resin Natural
 Durability (mating cycles max) 25
 First Mate / Last Break No
 Flammability 94V-2
 Glow-Wire Capable No
 Guide to Mating Part No
 Keying to Mating Part None
 Lock to Mating Part None
 Material - Metal Brass
 Material - Plating Mating Tin
 Material - Plating Termination Tin
 Material - Resin Nylon
 Net Weight 2.175/g
 Number of Rows 1
 Orientation Vertical
 PC Tail Length 4.45mm
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Bag
 Pitch - Mating Interface 5.08mm
 Pitch - Termination Interface 5.08mm
 Plating min - Mating 5.080µm
 Plating min - Termination 5.080µm
 Polarized to PCB No
 Shrouded Partial
 Stackable Yes
 Surface Mount Compatible (SMC) No
 Temperature Range - Operating See Product Specification
 Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 7.0A

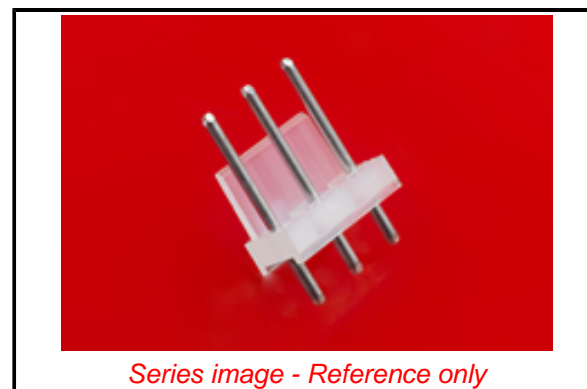

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 ECHA_01_2020 (16
 January 2020

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[2599 Series](#)

Mates With

Crimp Housing [3001](#)
 PCB Receptacle
[3002](#)

Voltage - Maximum 250V

Solder Process Data

Duration at Max. Process Temperature (seconds) 010

Lead-free Process Capability WAVE

Process Temperature max. C 260

Material Info

Engineering Number 2599M08A

Reference - Drawing Numbers

Packaging Specification PK-2599-0001-000

Product Specification PS-99020-0087-001

Symbol/Footprint Data SYM-1008-5081

This document was generated on 02/16/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[10-08-5081](#)