


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		D	REVISED PER ECO-14-011808	11AUG2014	AP	SB

D

C

B

A

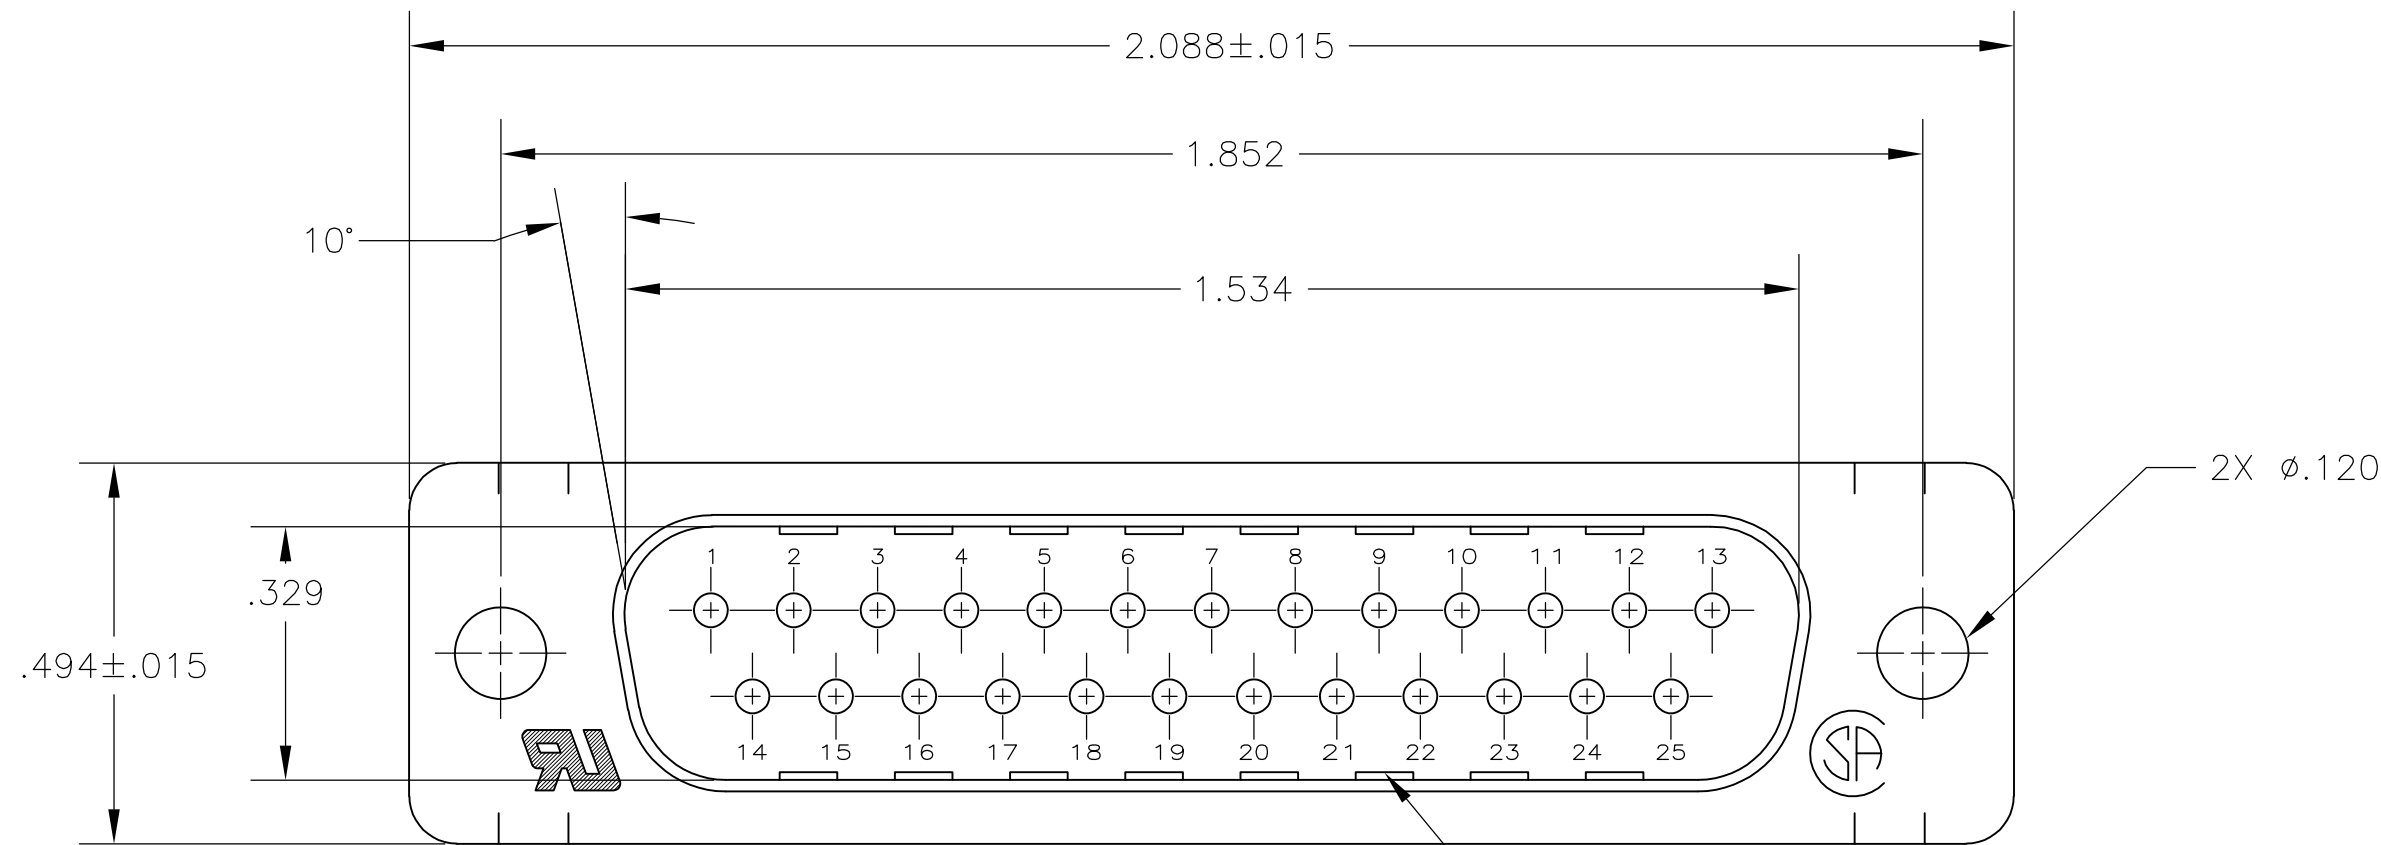

- 1

MOLDED PARTS: GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK.
- 2

SHELLS: CARBON STEEL.

CONTACTS: BRASS.
- SHELLS: .000200 MIN TIN OVER .000100 MIN COPPER.




CONTACTS: GOLD PLATING FOR A LENGTH OF .150 MIN FROM MATING END, .000030 MIN GOLD IN MATED AREA, .000100 MIN TIN ON SOLDER END, BOTH OVER .000050 MIN NICKEL.1

-OR-

GOLD FLASH OVER PALLADIUM-NICKEL PLATED FOR A LENGTH OF .150 MIN FROM MATING END, .000030 MIN TOTAL IN MATED AREA, .000100 MIN TIN ON SOLDER END, BOTH OVER .000050 MIN NICKEL.

GROUNDING INDENTS

MATING FACE

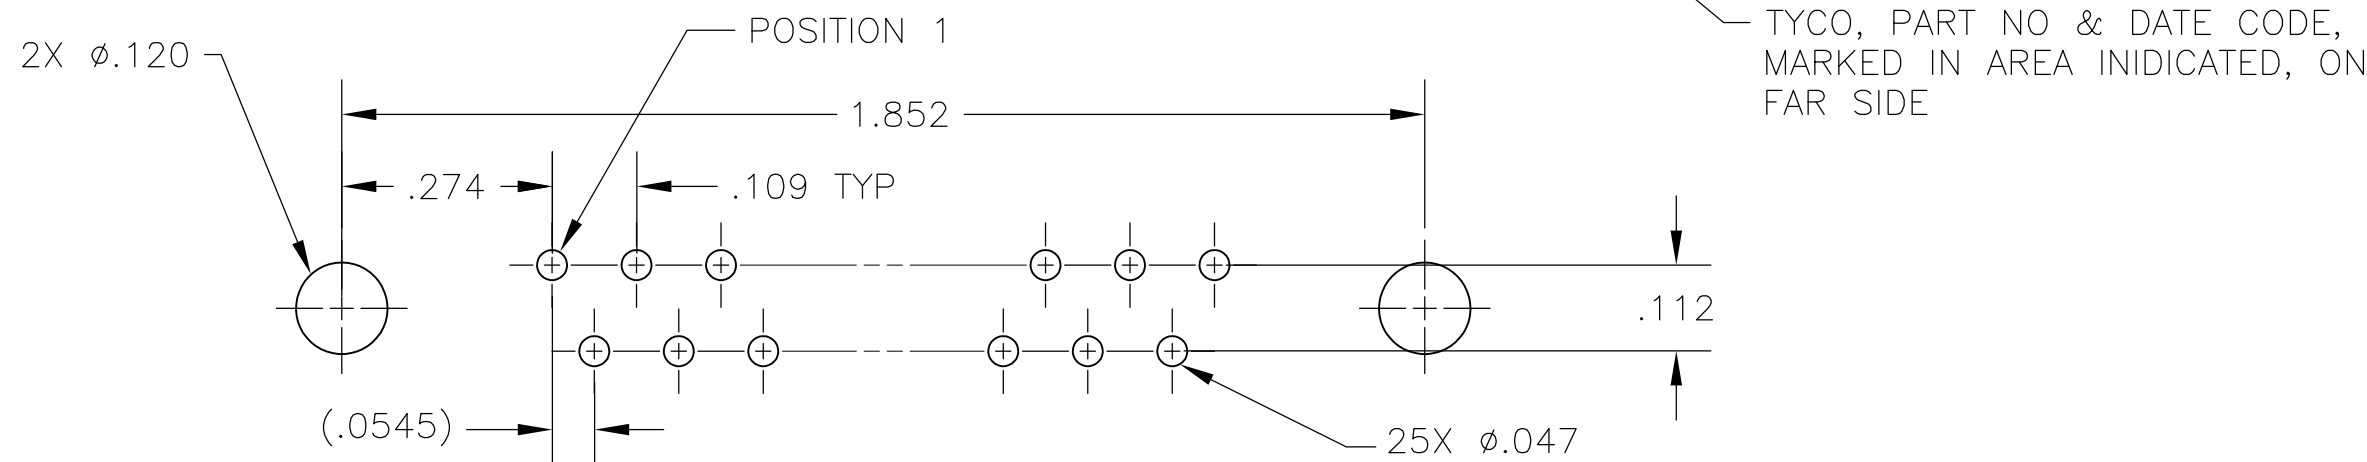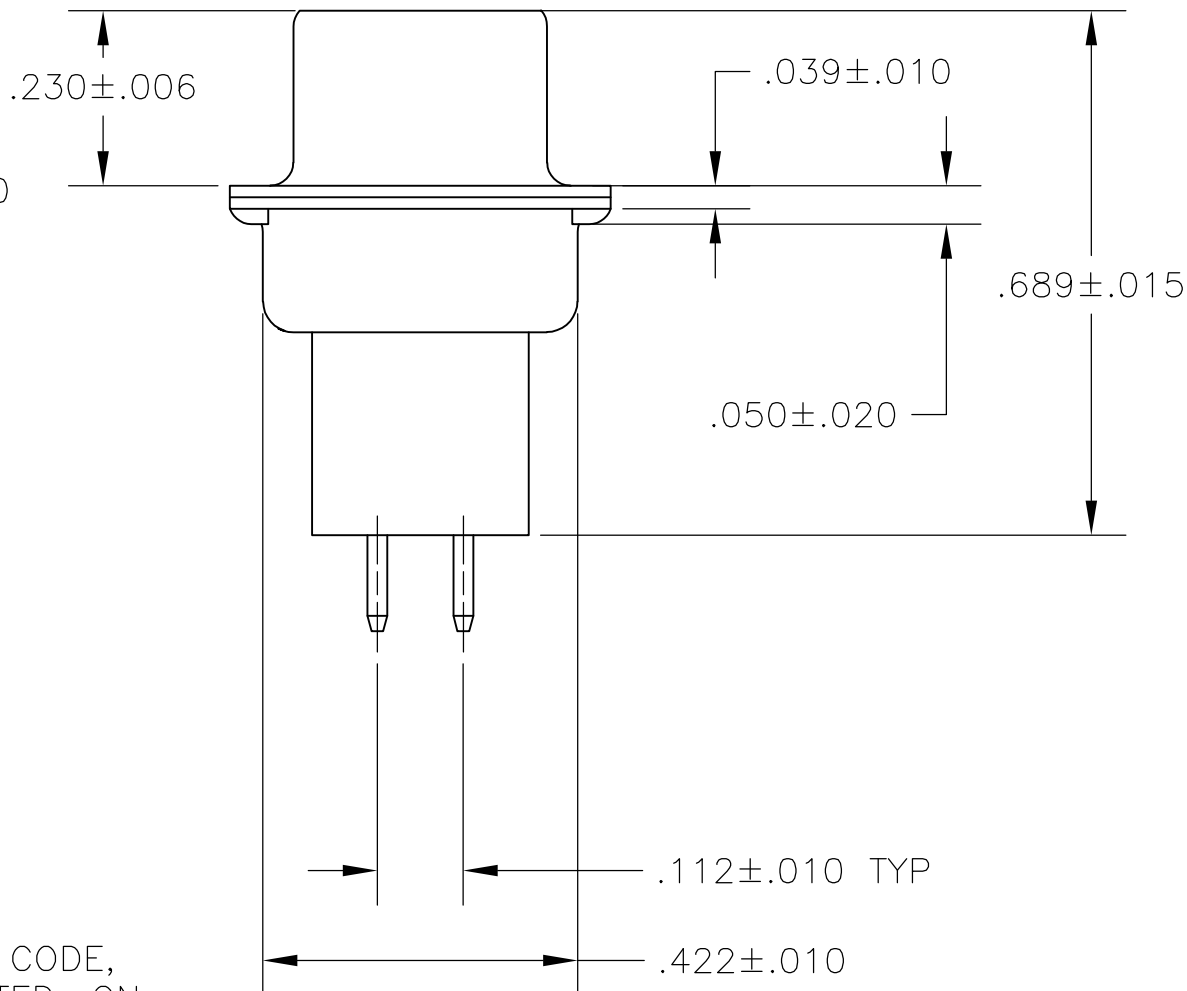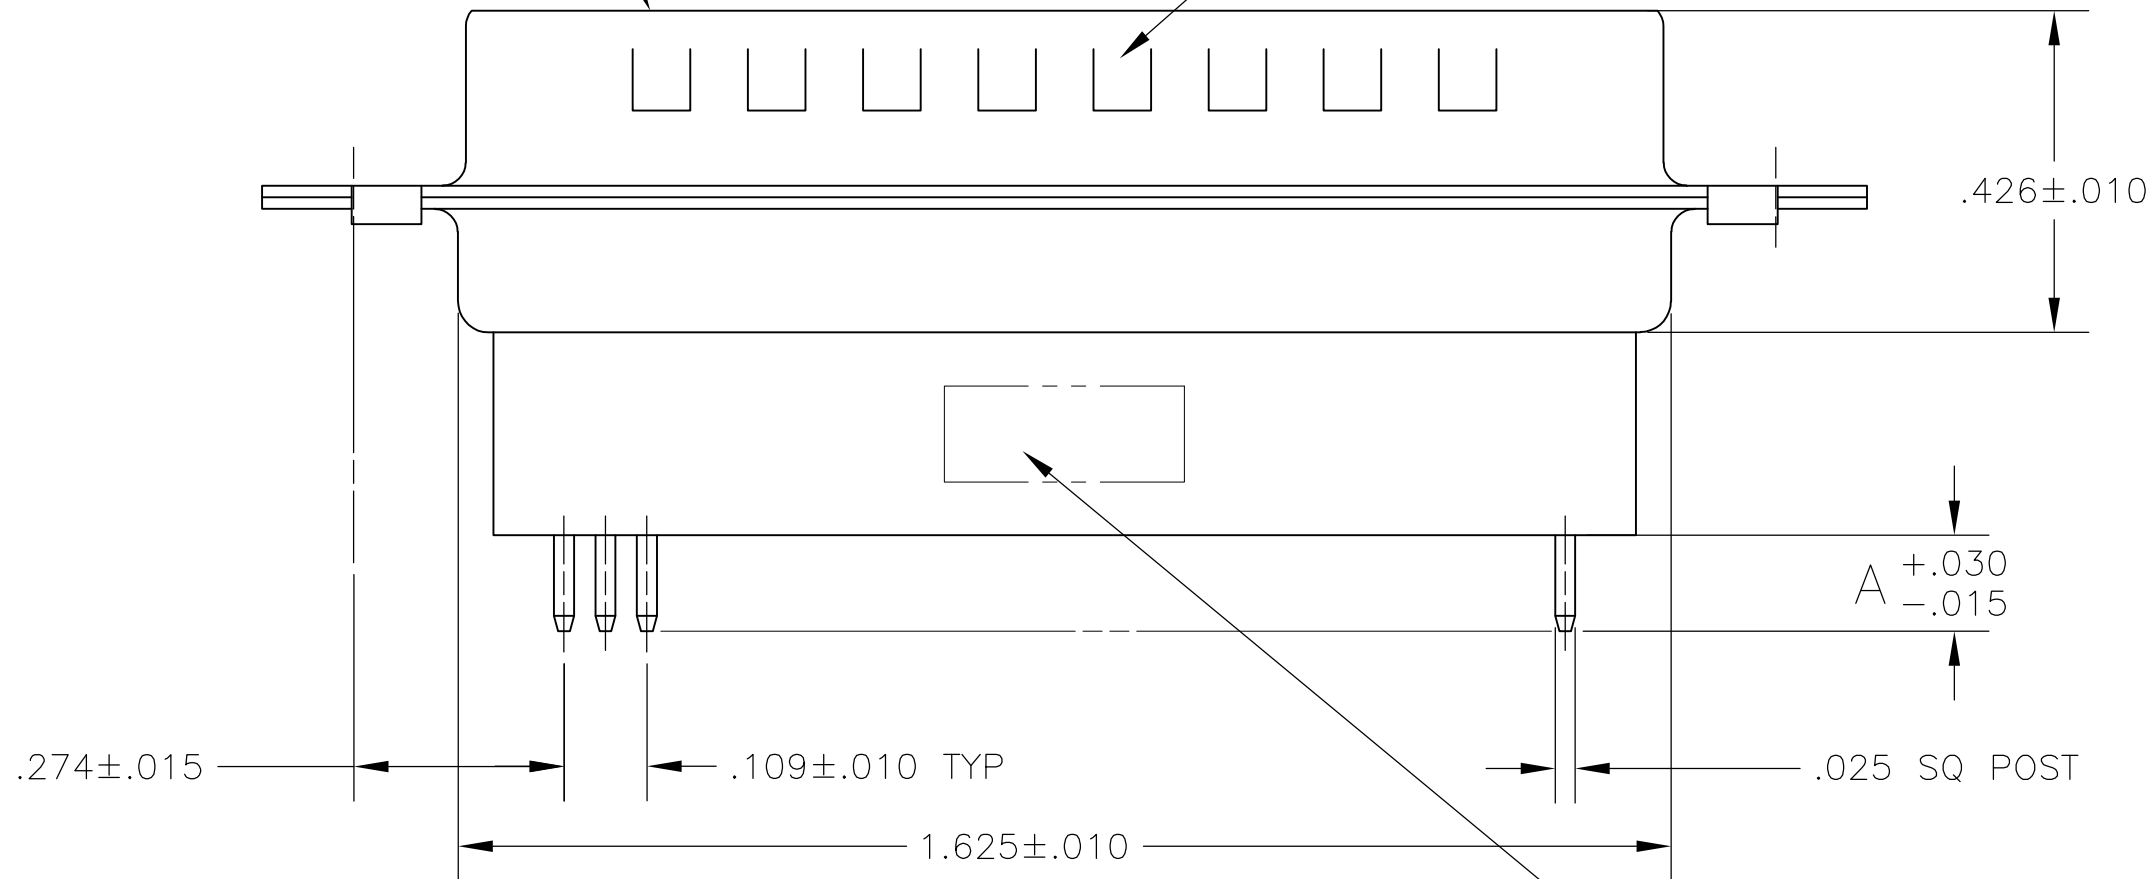

P.C. BOARD MOUNTING DIMENSIONS

TYCO, PART NO & DATE CODE, MARKED IN AREA INDICATED, ON FAR SIDE

.188	5745412-7
.125	5745412-1
A	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LATTUCA	16SEPT05	TE Connectivity		
DIMENSIONS: INCHES		CHK S. BOLASH	16SEPT05			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. WALMSLEY	16SEPT05	NAME		
0 PLC ± -		PRODUCT SPEC		PLUG ASSEMBLY, SIZE 3, 25 POSN,		
1 PLC ± -		108-40025		VERTICAL, .025 SQ. POSTS,		
2 PLC ± -		APPLICATION SPEC		GROUNDING INDENTS, AMPLIMITE HDP		
3 PLC ± .005		114-40013		SIZE	CAGE CODE	DRAWING NO
4 PLC ± -				A2	00779	C=5745412
ANGLES ± -		WEIGHT	-	RESTRICTED TO		
FINISH		CUSTOMER DRAWING		SCALE	NTS	SHEET 1 of 1
1						REV D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5745412-7](#)