





P	LTR	DESCRIPTION	DATE	DWN	APVD
F1		REVISED PER ECO-17-006767	02JUN2017	IT	WH

D

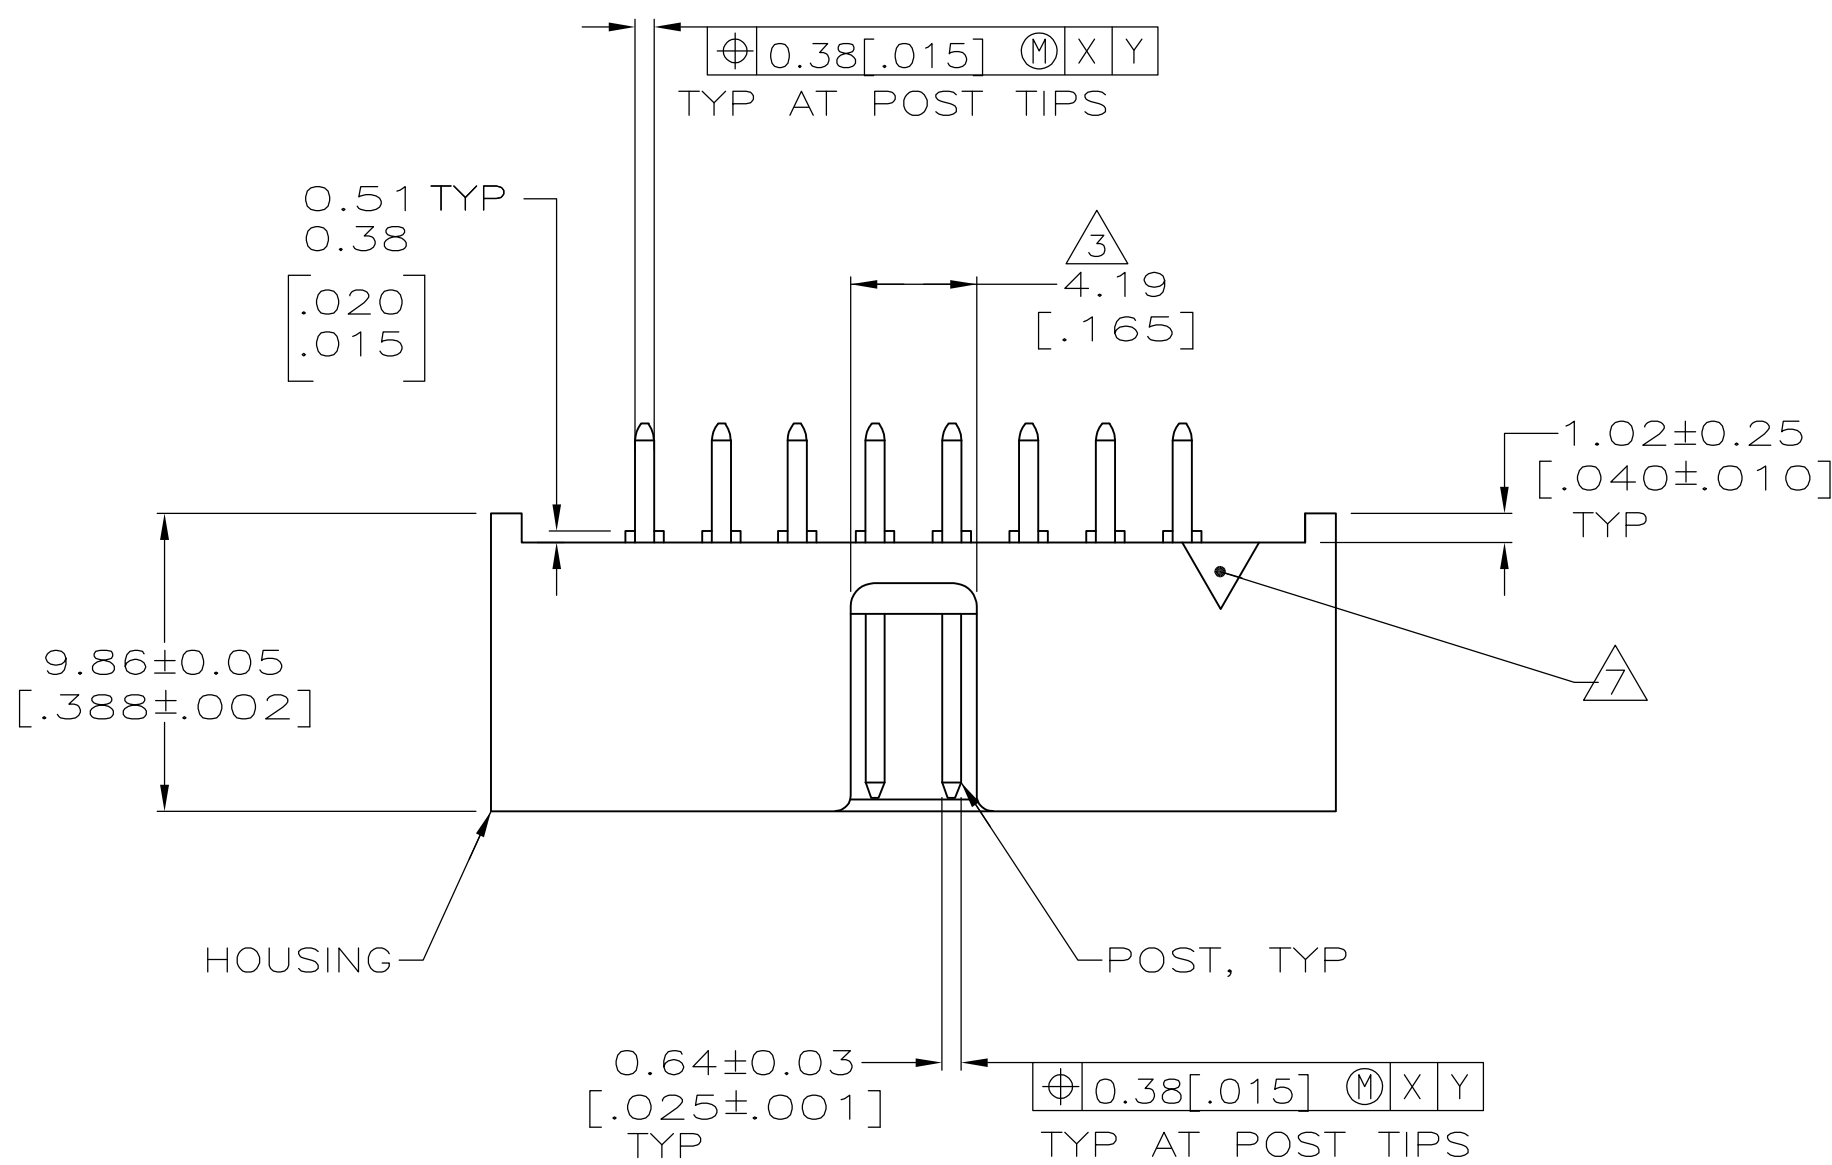

- DOUBLE BAR POLARIZATION.
- DIMENSION APPLIES AT THE INTERSECTION OF THE POST AND HOUSING.
- CENTER POLARIZATION SLOT.
- HOUSING: GLASS FILLED NYLON OR PBT, BLACK, UL 94V-0 RATED. POSTS: BRASS.
- POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.38μm[.000015] MIN TOTAL ON THE MATING SUFACES, 2.54μm[.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAILS, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST. -OR- 0.38μm[.000015] MIN GOLD PLATE ON THE MATING SURFACES, 2.54μm[.000100] MIN TIN-LEAD PLATE ON THE SOLDER-TAILS, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- DATUMS Y AND Z APPLY IN ZONE I.
- NUMBER 1 POSITION INDICATOR.
- OPTIONAL AMP IDENTIFICATION NUMBER (DATE CODE). LOCATION APPROXIMATELY WHERE SHOWN.

C

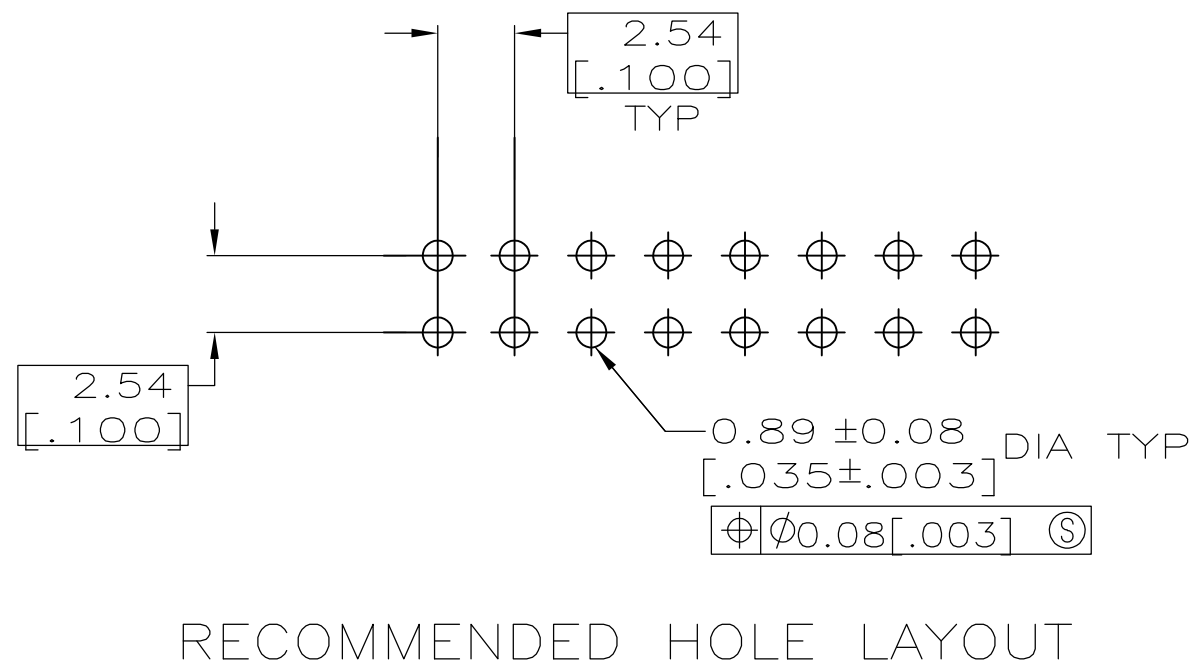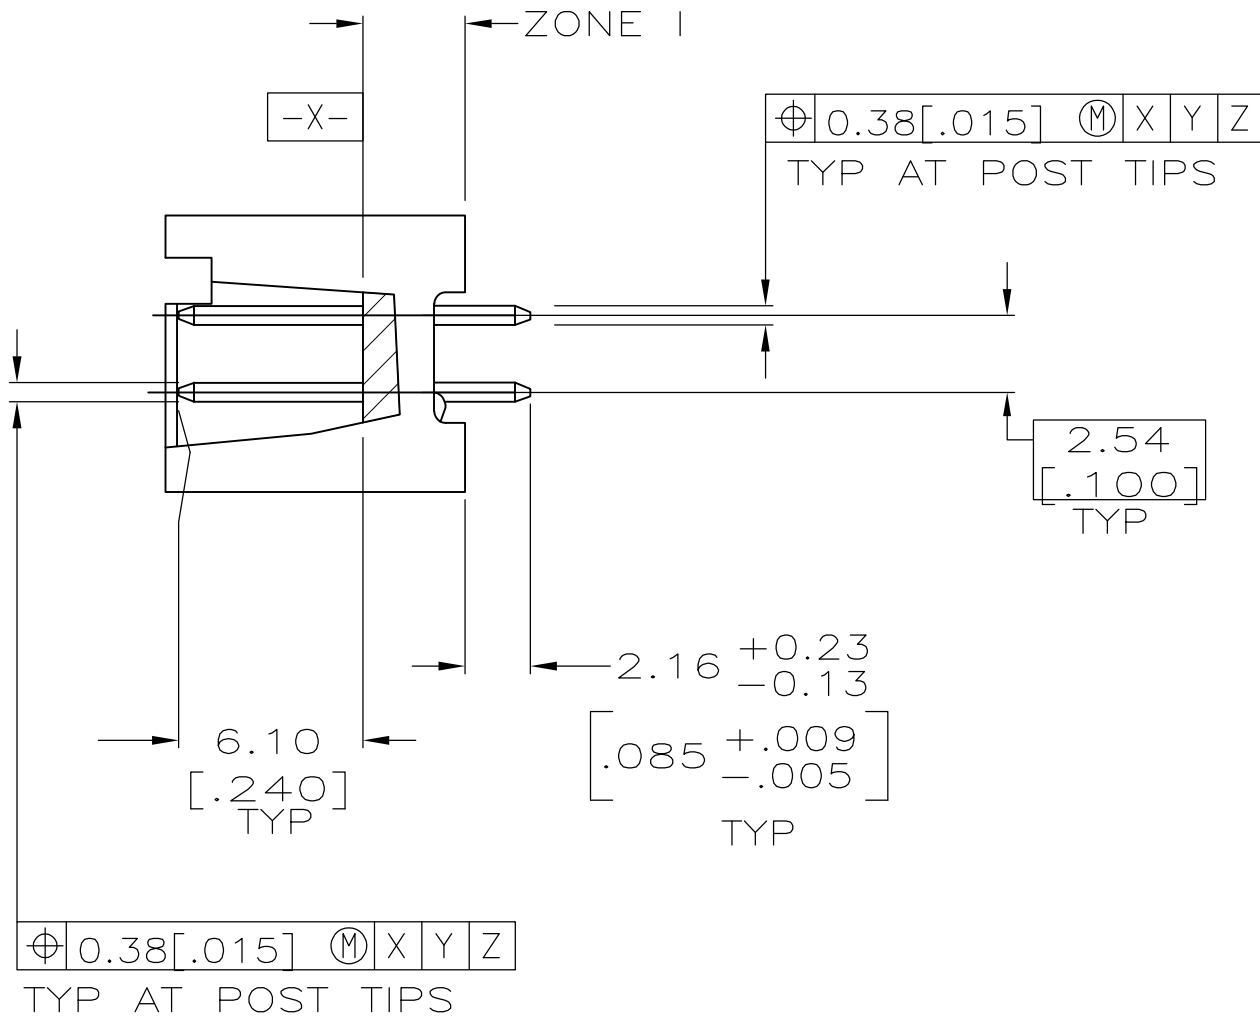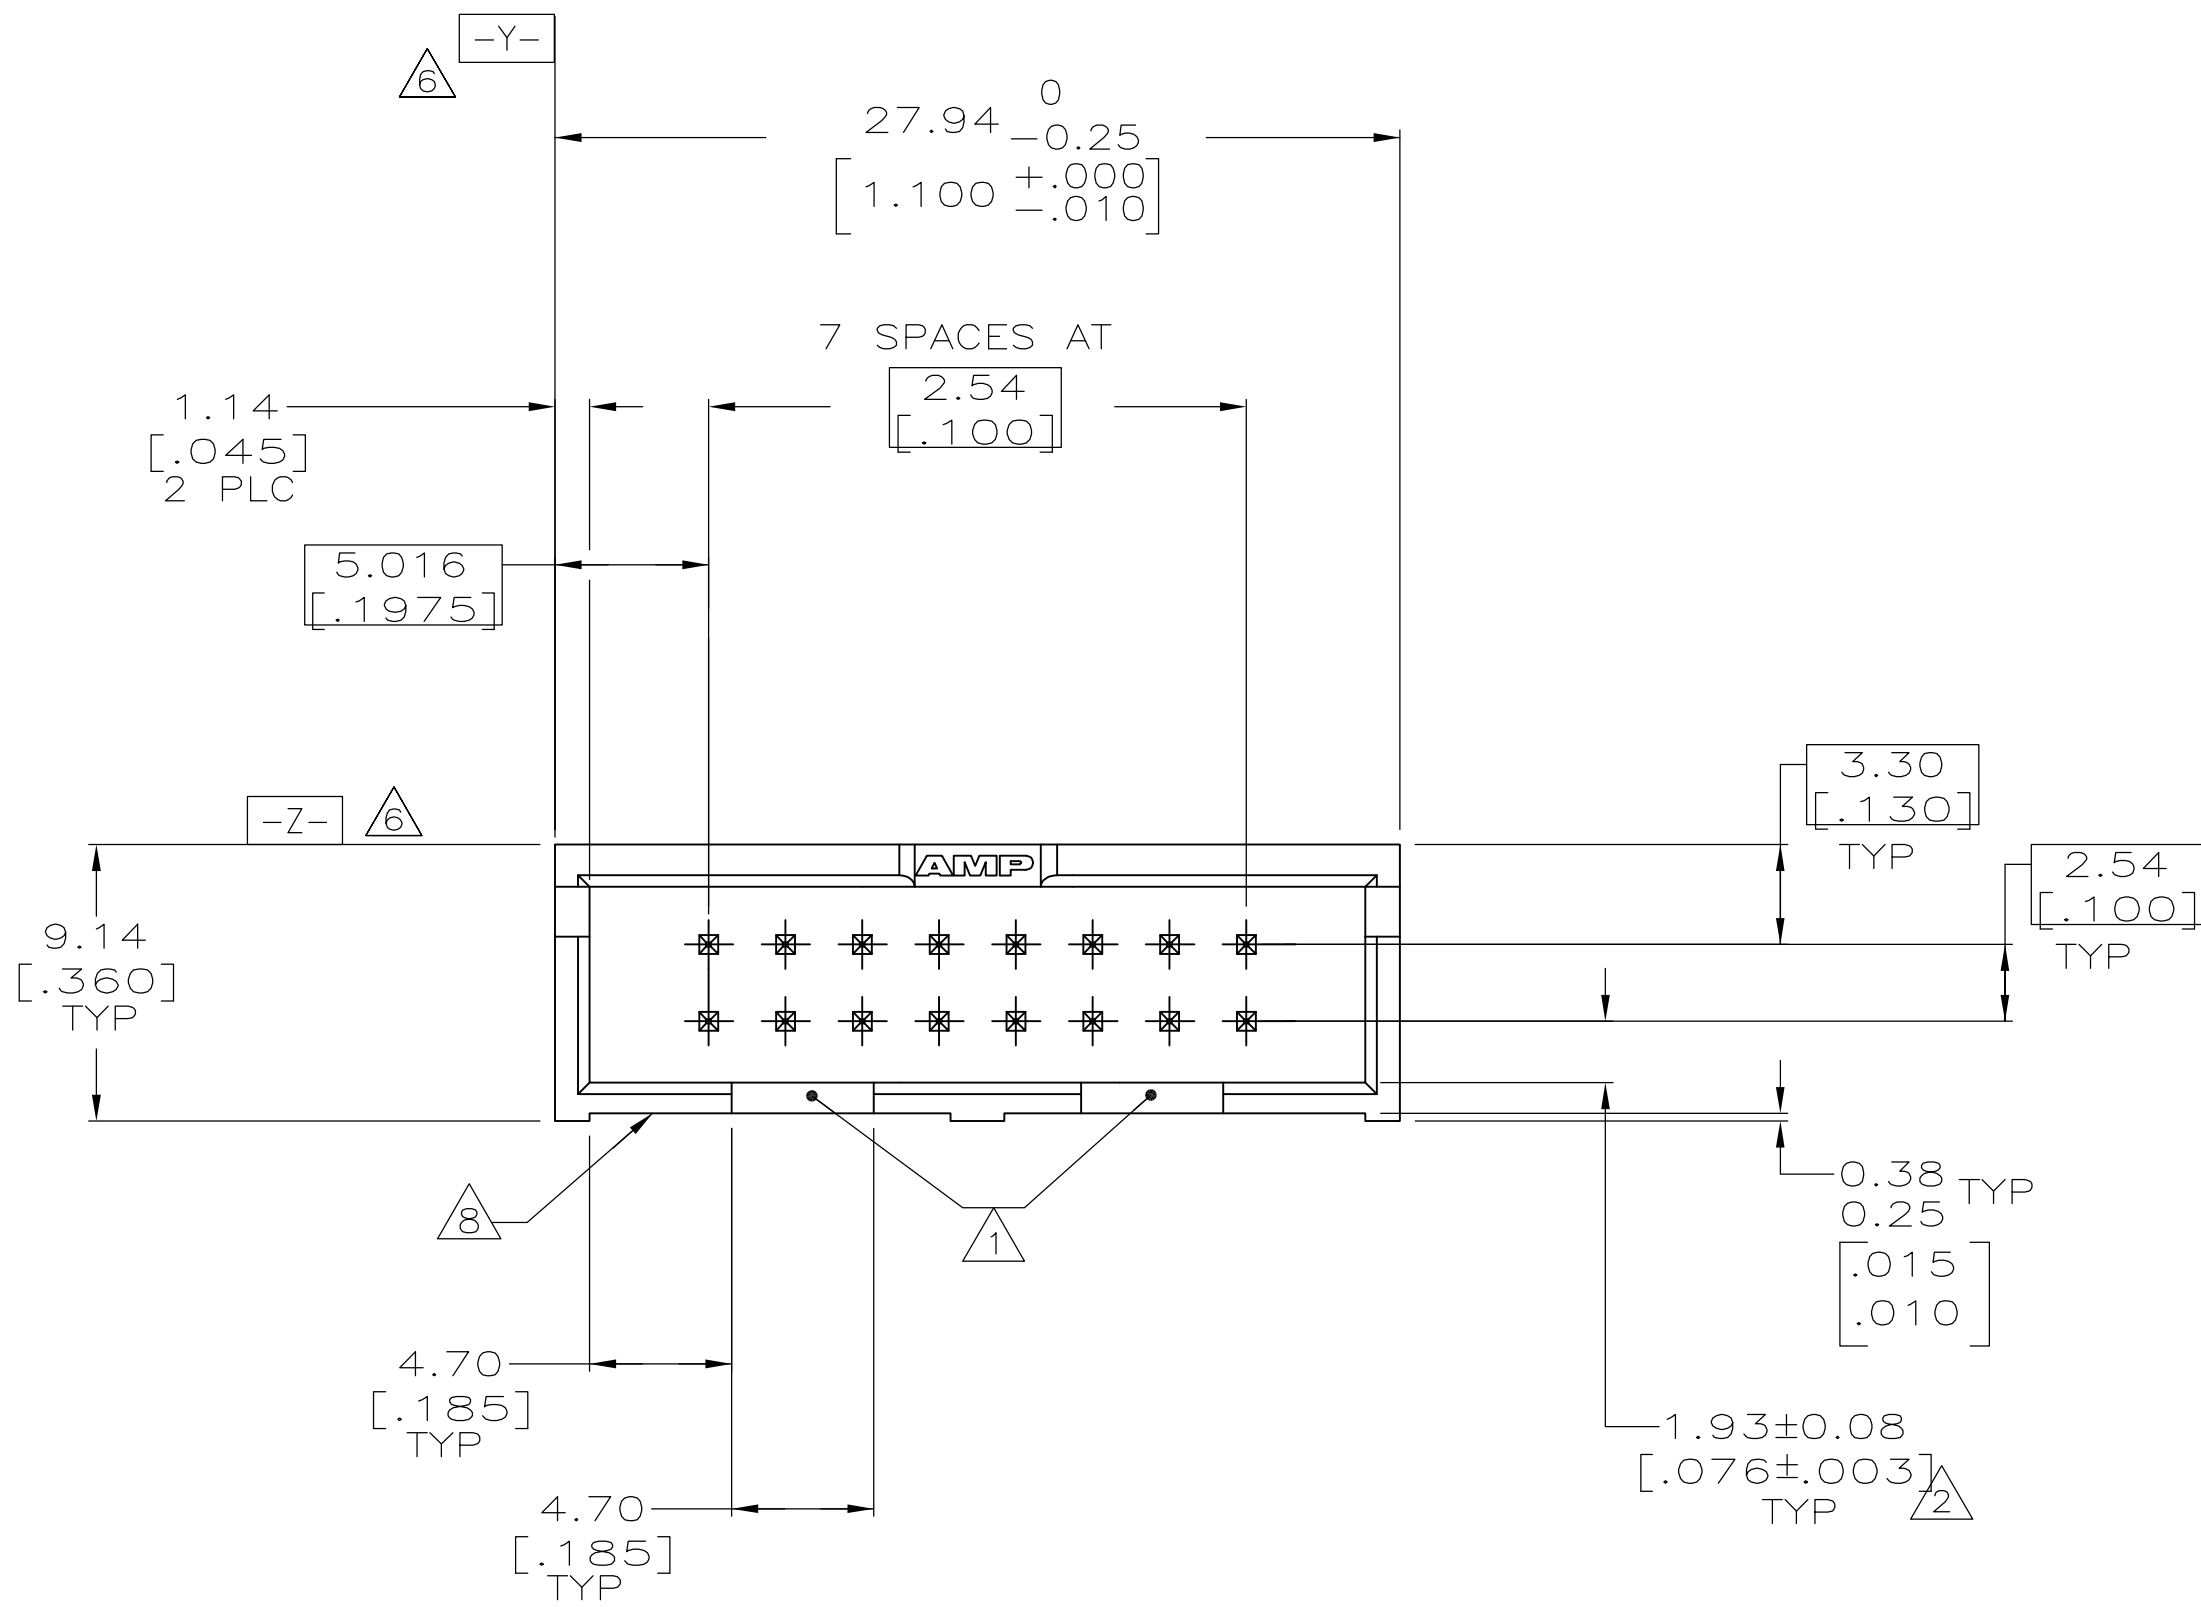

B

A

OBSOLETE	16	111669-3
NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H MOLL 11-5-92	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK W G LENKER 11-6-92	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R KILE 11-10-92	PRODUCT SPEC	
0 PLC ± -		108-40018		
1 PLC ± -		APPLICATION SPEC		
2 PLC ± 0.13[.005]		SIZE CAGE CODE DRAWING NO		
3 PLC ± -		RESTRICTED TO		
4 PLC ± -		WEIGHT 0.000000 A1 00779 111669		
MATERIAL		CUSTOMER DRAWING		
FINISH		SCALE 4:1 SHEET 1 OF 1 REV F1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[111669-3](#)